

# class10

## 1. Importing candy data

```
candy_file <- read.csv("https://raw.githubusercontent.com/fivethirtyeight/data/master/candy-  
candy = data.frame(candy_file, row.names=1)  
head(candy)
```

	chocolate	fruity	caramel	peanutyalmondy	nougat	crispedricewafer
100 Grand	1	0	1	0	0	1
3 Musketeers	1	0	0	0	1	0
One dime	0	0	0	0	0	0
One quarter	0	0	0	0	0	0
Air Heads	0	1	0	0	0	0
Almond Joy	1	0	0	1	0	0

	hard	bar	pluribus	sugarpercent	pricepercent	winpercent
100 Grand	0	1	0	0.732	0.860	66.97173
3 Musketeers	0	1	0	0.604	0.511	67.60294
One dime	0	0	0	0.011	0.116	32.26109
One quarter	0	0	0	0.011	0.511	46.11650
Air Heads	0	0	0	0.906	0.511	52.34146
Almond Joy	0	1	0	0.465	0.767	50.34755

Q1. How many different candy types are in this dataset?

```
ncol(candy)
```

```
[1] 12
```

But 3 of those columns aren't candy types, so there are 9 total candy types.

Q2. How many fruity candy types are in the dataset?

```
sum(candy$fruity)
```

```
[1] 38
```

2. What is your favorite candy?

Q3. What is your favorite candy in the dataset and what is its winpercent value?

```
candy["100 Grand", ]$winpercent
```

```
[1] 66.97173
```

Q4. What is the winpercent value for “Kit Kat”?

```
candy["Kit Kat", ]$winpercent
```

```
[1] 76.7686
```

Q5. What is the winpercent value for “Tootsie Roll Snack Bars”?

```
candy["Tootsie Roll Snack Bars", ]$winpercent
```

```
[1] 49.6535
```

Side-note: the `skimr::skim()` function

```
library("skimr")  
skim(candy)
```

Table 1: Data summary

Name	candy
Number of rows	85
Number of columns	12
<hr/>	
Column type frequency:	
numeric	12
<hr/>	
Group variables	None

---

**Variable type: numeric**

skim_variable	n_missing	complete_rate	mean	sd	p0	p25	p50	p75	p100	hist
chocolate	0	1	0.44	0.50	0.00	0.00	0.00	1.00	1.00	
fruity	0	1	0.45	0.50	0.00	0.00	0.00	1.00	1.00	
caramel	0	1	0.16	0.37	0.00	0.00	0.00	0.00	1.00	
peanutyalmondy	0	1	0.16	0.37	0.00	0.00	0.00	0.00	1.00	
nougat	0	1	0.08	0.28	0.00	0.00	0.00	0.00	1.00	
crispedricewafer	0	1	0.08	0.28	0.00	0.00	0.00	0.00	1.00	
hard	0	1	0.18	0.38	0.00	0.00	0.00	0.00	1.00	
bar	0	1	0.25	0.43	0.00	0.00	0.00	0.00	1.00	
pluribus	0	1	0.52	0.50	0.00	0.00	1.00	1.00	1.00	
sugarpercent	0	1	0.48	0.28	0.01	0.22	0.47	0.73	0.99	
pricepercent	0	1	0.47	0.29	0.01	0.26	0.47	0.65	0.98	
winpercent	0	1	50.32	14.71	22.45	39.14	47.83	59.86	84.18	

Q6. Is there any variable/column that looks to be on a different scale to the majority of the other columns in the dataset?

The winpercent variable/column seems to be on a different scale than the other variables/columns of the dataset since its mean is 50.316...%, while the other columns' means are between 0-1.

Q7. What do you think a zero and one represent for the candy\$chocolate column?

It represents whether a specific candy contain chocolate. The candy would get a 0 in the candy\$chocolate column if it doesn't contain chocolate and get a 1 if it does.

3. Overall Candy Rankings >Q13. What are the five least liked candy types in this set?

```
head(candy[order(candy$winpercent),], n=5)
```

	chocolate	fruity	caramel	peanutyalmondy	nougat	crispedricewafer	hard	bar	pluribus	sugarpercent	pricepercent
Nik L Nip	0	1	0		0				1	0.197	0.976
Boston Baked Beans	0	0	0		1						
Chiclets	0	1	0		0						
Super Bubble	0	1	0		0						
Jawbusters	0	1	0		0						

Boston Baked Beans	0	0	0	1	0.313	0.511
Chiclets	0	0	0	1	0.046	0.325
Super Bubble	0	0	0	0	0.162	0.116
Jawbusters	0	1	0	1	0.093	0.511

	winpercent
Nik L Nip	22.44534
Boston Baked Beans	23.41782
Chiclets	24.52499
Super Bubble	27.30386
Jawbusters	28.12744

Q14. What are the top 5 all time favorite candy types out of this set?

```
head(candy[order(candy$winpercent, decreasing=TRUE), ], n=5)
```

	chocolate	fruity	caramel	peanut	almond	nougat
Reese's Peanut Butter cup	1	0	0		1	0
Reese's Miniatures	1	0	0		1	0
Twix	1	0	1		0	0
Kit Kat	1	0	0		0	0
Snickers	1	0	1		1	1

	crispedrice	wafer	hard bar	pluribus	sugar	percent
Reese's Peanut Butter cup		0	0	0		0.720
Reese's Miniatures		0	0	0		0.034
Twix		1	0	1		0.546
Kit Kat		1	0	1		0.313
Snickers		0	0	1		0.546


  

	price	percent	winpercent
Reese's Peanut Butter cup	0.651		84.18029
Reese's Miniatures	0.279		81.86626
Twix	0.906		81.64291
Kit Kat	0.511		76.76860
Snickers	0.651		76.67378

Q15. Make a first barplot of candy ranking based on winpercent values.


```
library(ggplot2)

ggplot(candy) +
  aes(winpercent, rownames(candy)) +
  geom_col()
```

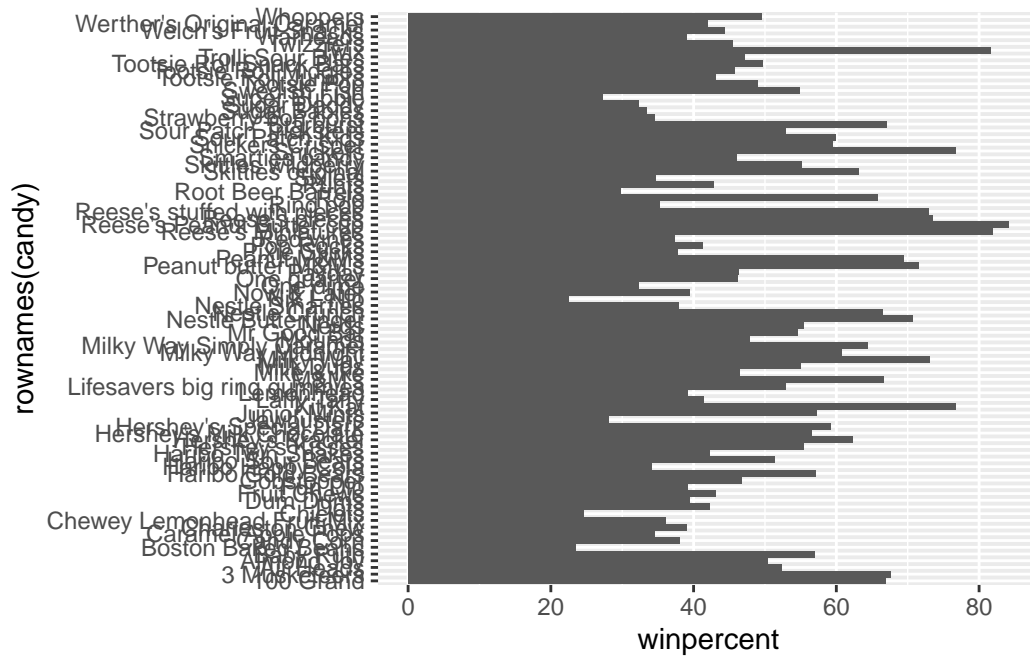

```
library(ggplot2)


ggplot(candy) +
  aes(winpercent, reorder(rownames(candy), winpercent)) +
  geom_col() +
  theme(
    axis.text.y = element_text(size = 4) # Reduce text size
  )
```

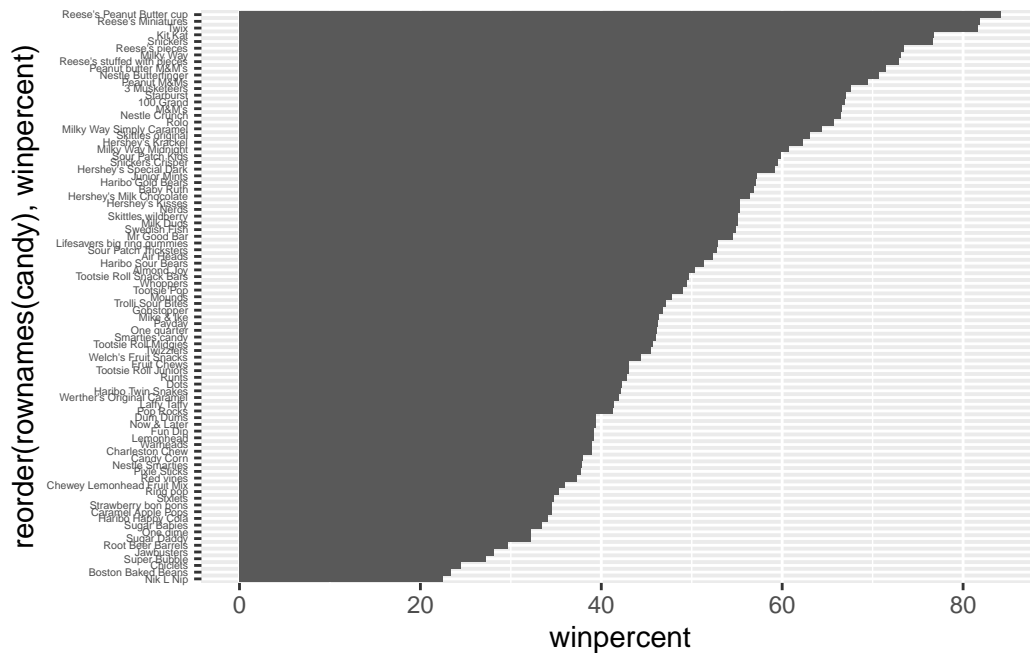

Adding useful color to the bar chart:

```
my_cols=rep("black", nrow(candy))
my_cols[as.logical(candy$chocolate)] = "chocolate"
my_cols[as.logical(candy$bar)] = "brown"
my_cols[as.logical(candy$fruity)] = "pink"

ggplot(candy) +
  aes(winpercent, reorder(rownames(candy),winpercent)) +
  geom_col(fill=my_cols) +
  theme(
    axis.text.y = element_text(size = 4) # Reduce text size
  )
```

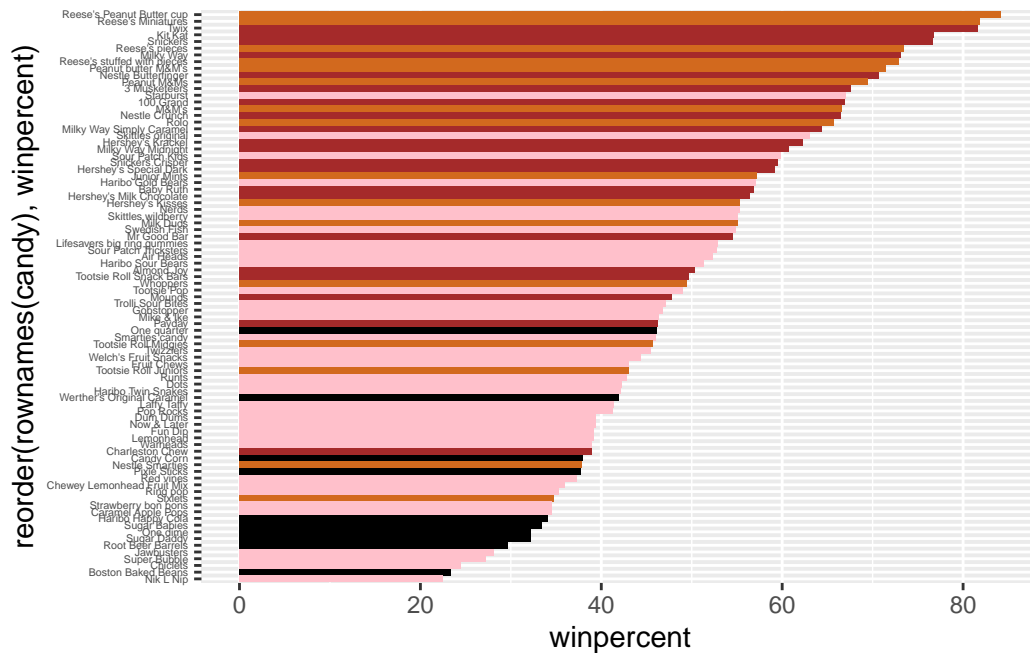

Now, for the first time, using this plot we can answer questions like: > Q17. What is the worst ranked chocolate candy?

Sixlets

Q18. What is the best ranked fruity candy?


Nik L Nip

4. Taking a look at pricepercent

```
library(ggrepel)

# How about a plot of price vs win
ggplot(candy) +
  aes(winpercent, pricepercent, label=rownames(candy)) +
  geom_point(col=my_cols) +
  geom_text_repel(col=my_cols, size=3.3, max.overlaps = 5)
```

Warning: ggrepel: 65 unlabeled data points (too many overlaps). Consider increasing max.overlaps

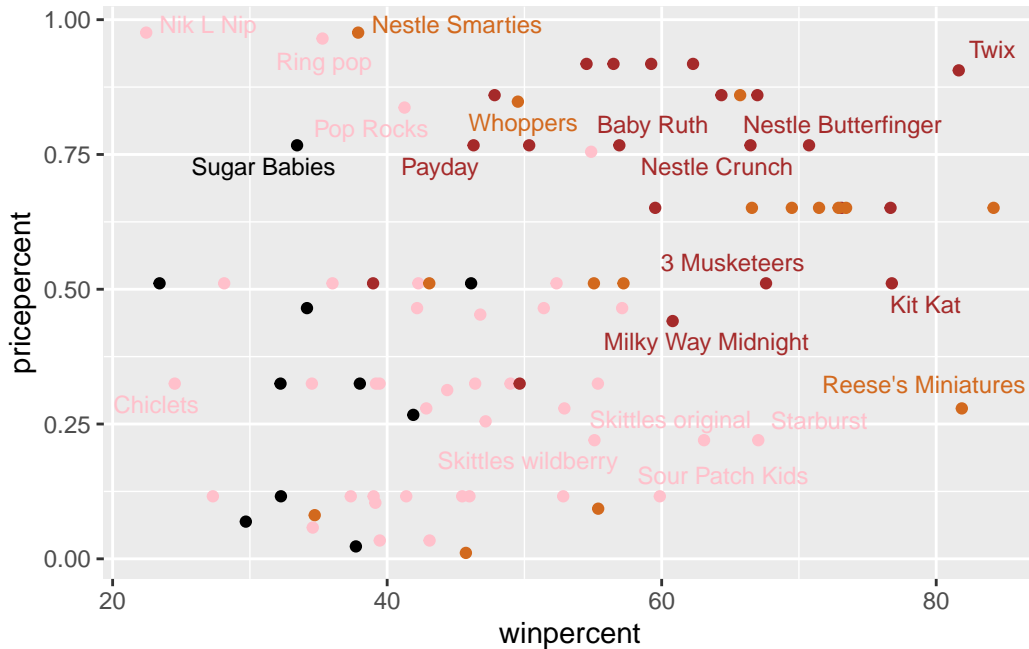

Q19. Which candy type is the highest ranked in terms of winpercent for the least money - i.e. offers the most bang for your buck?

Reese's Miniatures are ranked the highest in terms of winpercent for the least money (located in the bottom right quadrant-ish of the plot).

Q20. What are the top 5 most expensive candy types in the dataset and of these which is the least popular?


Nik L Nip is the most expensive and the least popular. Here are the top 5 most expensive candies:

```
ord <- order(candy$pricepercent, decreasing = TRUE)
head( candy[ord,c(11,12)], n=5 )
```

	pricepercent	winpercent
Nik L Nip	0.976	22.44534
Nestle Smarties	0.976	37.88719
Ring pop	0.965	35.29076
Hershey's Krackel	0.918	62.28448
Hershey's Milk Chocolate	0.918	56.49050



```
# Make a lollipop chart of pricepercent
ggplot(candy) +
  aes(pricepercent, reorder(rownames(candy), pricepercent)) +
  geom_segment(aes(yend = reorder(rownames(candy), pricepercent),
                    xend = 0), col="gray40") +
  geom_point()
```

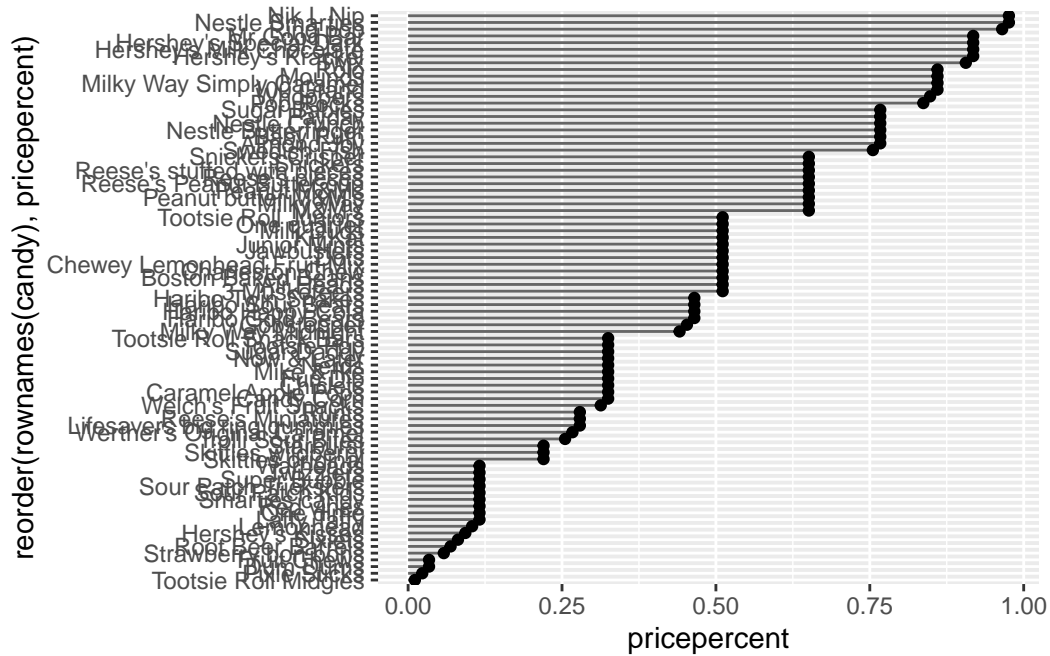


## 5. Exploring the correlation structure

```
library(corrplot)
```

```
corrplot 0.95 loaded
```

```
cij <- cor(candy)
corrplot(cij)
```

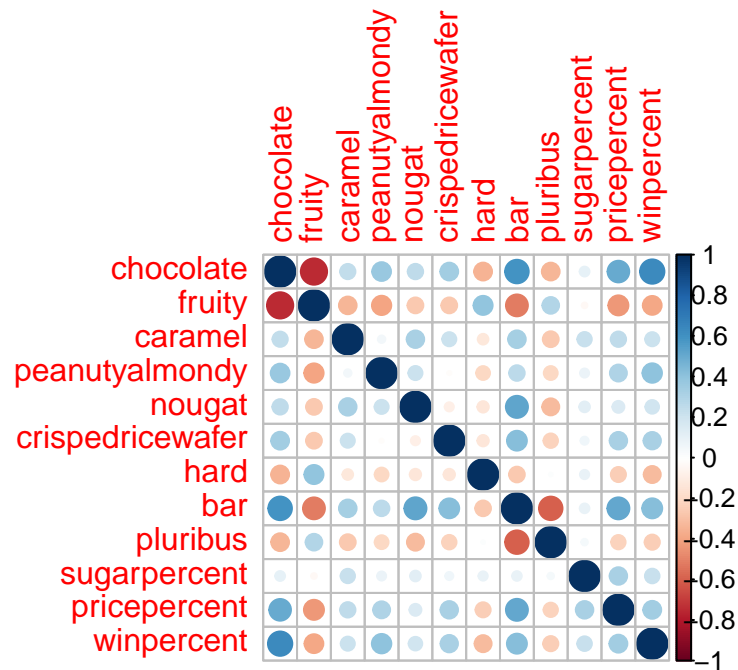

Q22. Examining this plot what two variables are anti-correlated (i.e. have minus values)?

chocolate & fruity, bar & pluribus

Q23. Similarly, what two variables are most positively correlated?

winpercent & chocolate, also bar and chocolate

## 6. Principal Component Analysis

```
pca <- prcomp(candy, scale=TRUE)
summary(pca)
```

Importance of components:


	PC1	PC2	PC3	PC4	PC5	PC6	PC7
Standard deviation	2.0788	1.1378	1.1092	1.07533	0.9518	0.81923	0.81530
Proportion of Variance	0.3601	0.1079	0.1025	0.09636	0.0755	0.05593	0.05539
Cumulative Proportion	0.3601	0.4680	0.5705	0.66688	0.7424	0.79830	0.85369


	PC8	PC9	PC10	PC11	PC12
Standard deviation	0.74530	0.67824	0.62349	0.43974	0.39760
Proportion of Variance	0.04629	0.03833	0.03239	0.01611	0.01317
Cumulative Proportion	0.89998	0.93832	0.97071	0.98683	1.00000

Now we can plot our main PCA score plot of PC1 vs PC2.

```
plot(pca$x[,1], pca$x[,2])
```

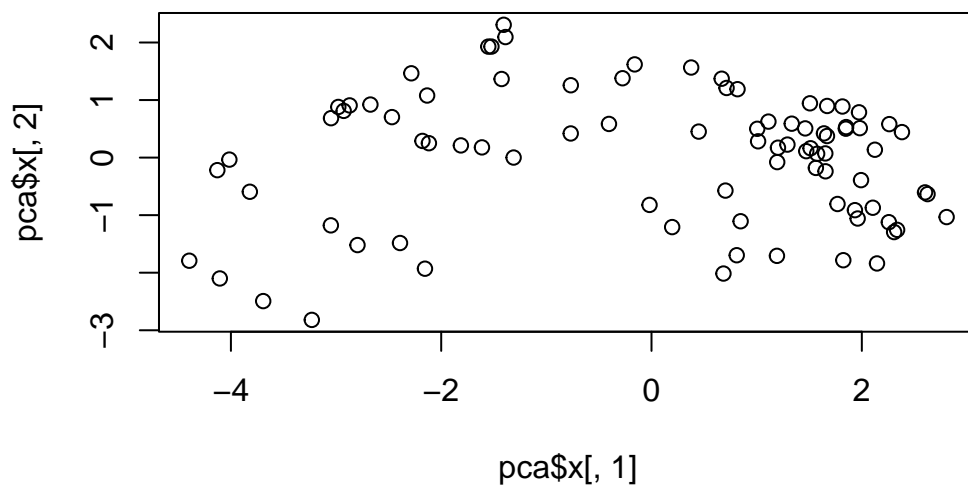


```
plot(pca$x[,1:2], col=my_cols, pch=16)
```

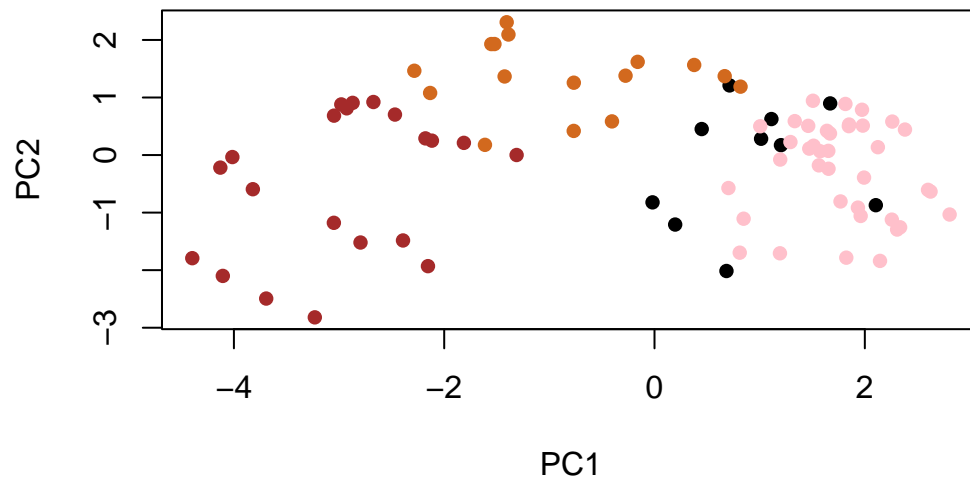

```
# Make a new data-frame with our PCA results and candy data  
my_data <- cbind(candy, pca$x[,1:3])
```

```
p <- ggplot(my_data) +  
  aes(x=PC1, y=PC2,  
      size=winpercent/100,  
      text=rownames(my_data),  
      label=rownames(my_data)) +  
  geom_point(col=my_cols)
```

p

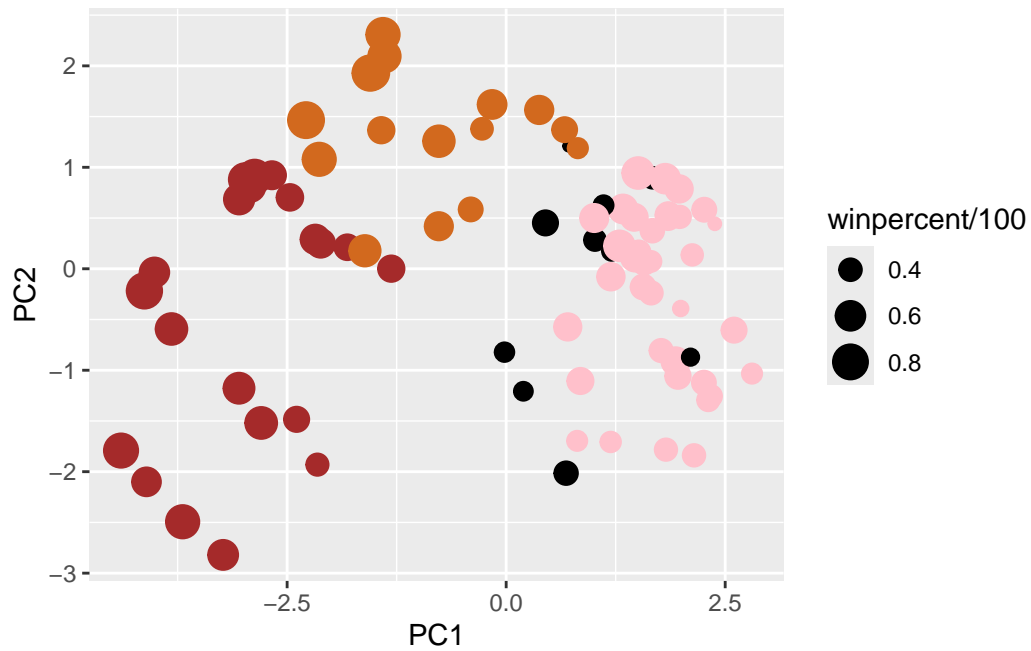


```
library(ggrepel)

p + geom_text_repel(size=3.3, col=my_cols, max.overlaps = 7) +
  theme(legend.position = "none") +
  labs(title="Halloween Candy PCA Space",
        subtitle="Colored by type: chocolate bar (dark brown), chocolate other (light brown),",
        caption="Data from 538")
```

Warning: ggrepel: 59 unlabeled data points (too many overlaps). Consider increasing max.overlaps

## Halloween Candy PCA Space

Colored by type: chocolate bar (dark brown), chocolate other (light brown),

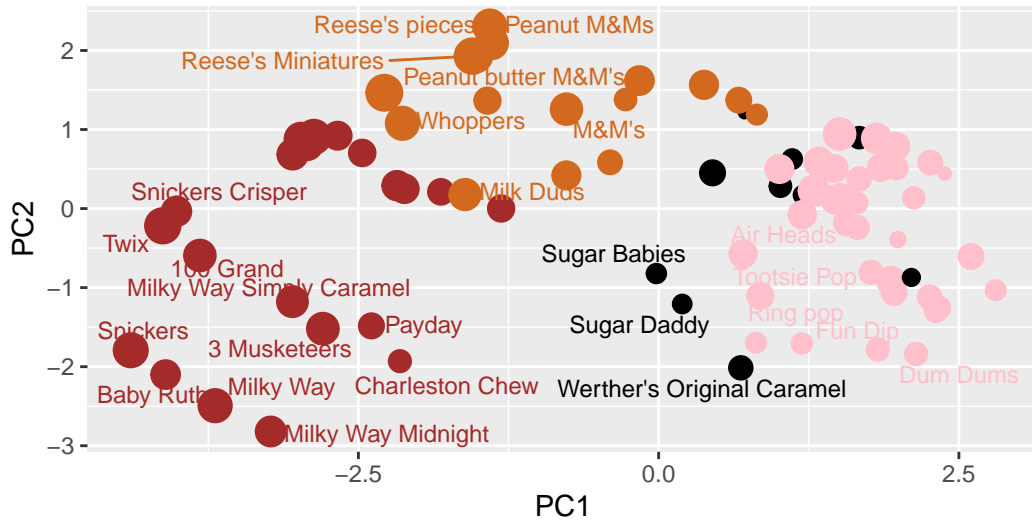

Data from 538

```
library(plotly)
```

Attaching package: 'plotly'

The following object is masked from 'package:ggplot2':

last\_plot

The following object is masked from 'package:stats':


filter

The following object is masked from 'package:graphics':


layout

```
ggplotly(p)
```

file:///private/var/folders/\_d/vvmf9\_l90rd4kq5m6g3dy9s00000gn/T/Rtmp4TbjWx/file20d349c7cfca,

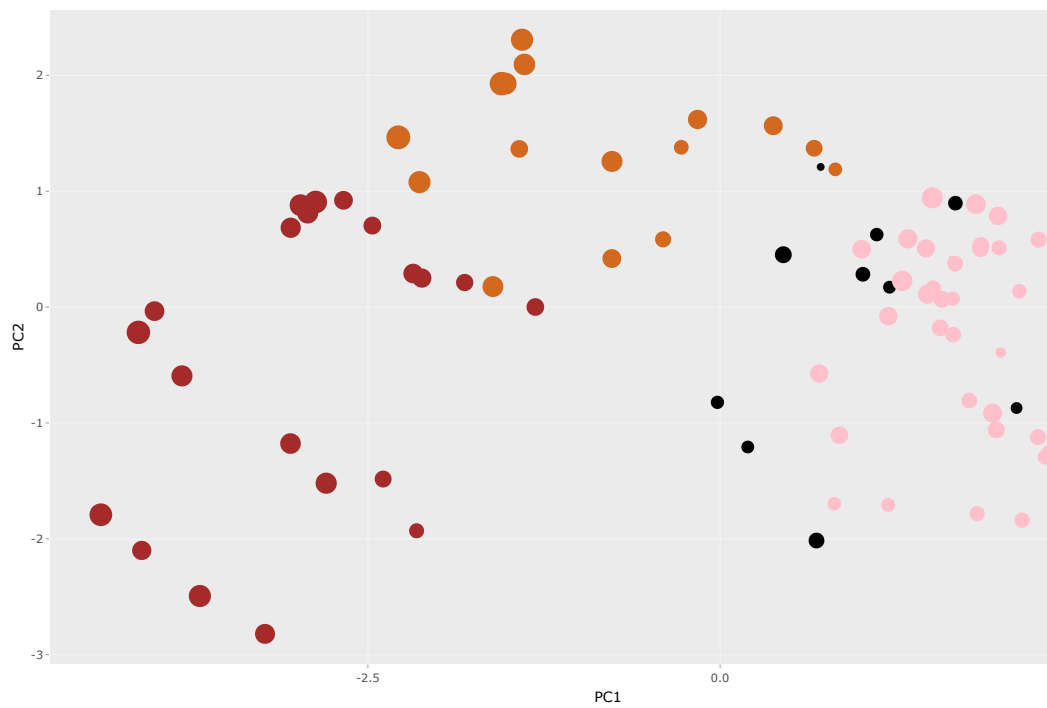

```
par(mar=c(8,4,2,2))
barplot(pca$rotation[,1], las=2, ylab="PC1 Contribution")
```

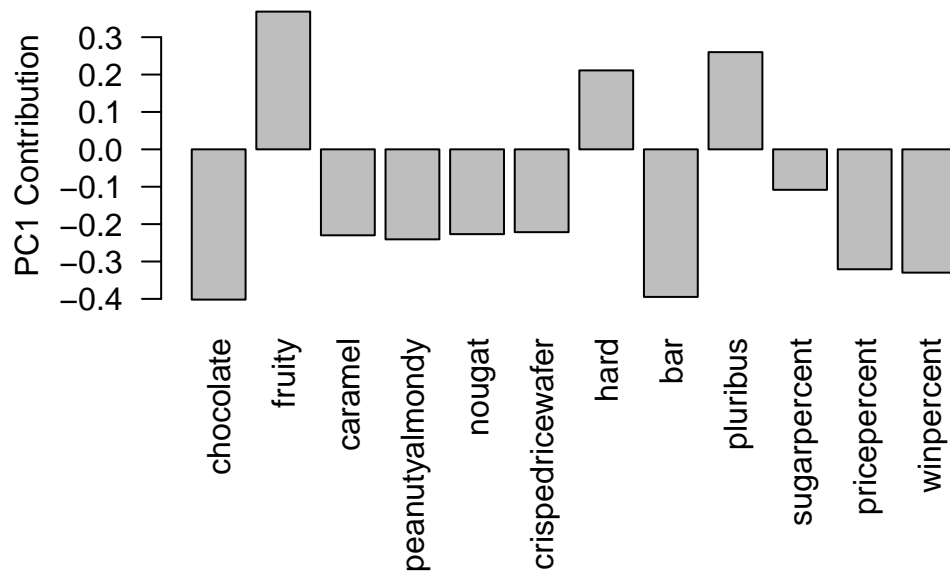

Q24. What original variables are picked up strongly by PC1 in the positive direction? Do these make sense to you?

Fruity, hard, and pluribus. This makes sense since a lot of hard fruit candies are sold together in big packs, like Life Savers.