ProxiSpeak Phase 1 — Sample Diagram

Real-Time Multi-User Avatar Movement

The diagram below summarizes the movement flow described in the provided document: a browser sends position updates to the Socket.IO server, the server validates coordinates, and connected browsers update their avatars. When a user disconnects, the server removes that user and notifies the others.

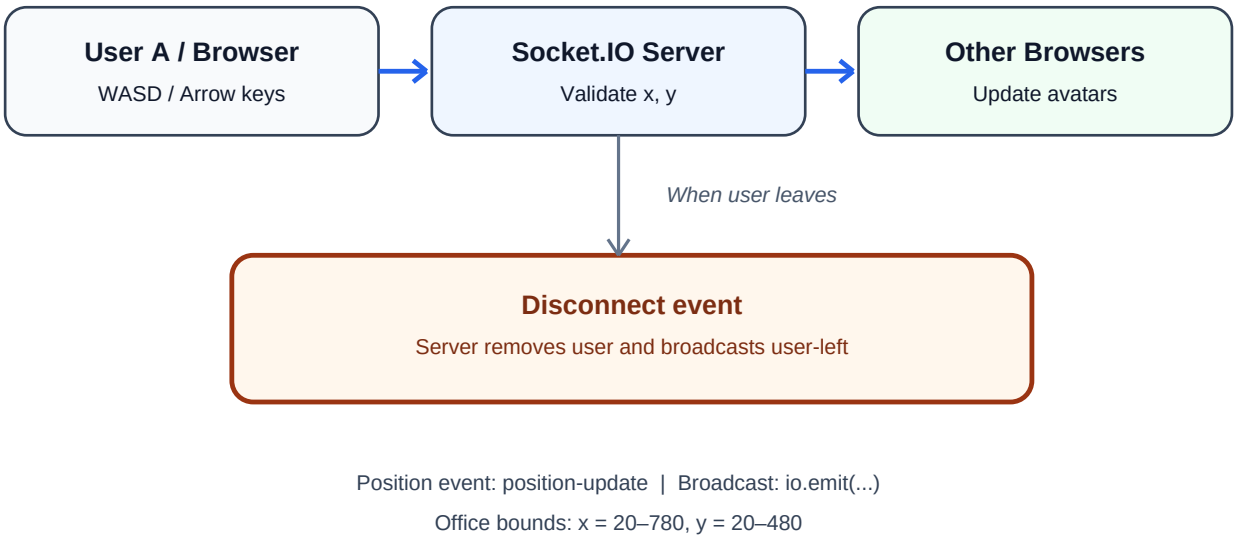

How to read the diagram

1. User A moves with WASD or the arrow keys.

2. The frontend emits a position-update event containing x and y coordinates.

3. The backend validates the coordinates, keeps the avatar within the office boundaries, and broadcasts the updated position.

4. Other connected browsers render the avatar at the updated position.

5. On disconnect, the server removes the user and emits user-left / users-update events.

Note: This is a sample diagram page based on the uploaded ProxiSpeak Phase 1 document. The original code and pages are not altered in this file; this PDF adds an explanatory diagram page.