

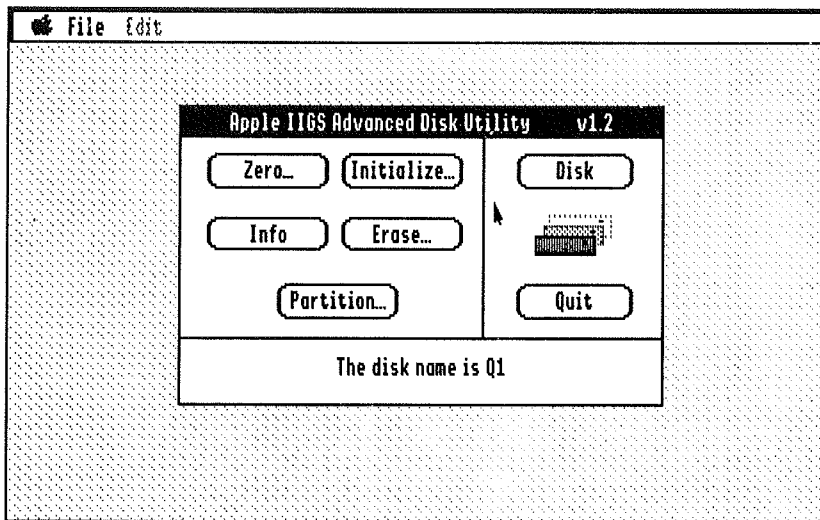


Figure 10C—The Advanced Disk Utility

- *Disk*: Chooses the disk on which to perform an operation.
- *Quit*: Quits the Advanced Disk Utility.
- *Initialize*: Prepares the disk to receive data. If your disk was a parking lot in which cars (files) can be parked, initializing it would be equivalent to painting lines and numbers on the pavement to divide the lot into parking spaces.
- *Zero*: Zeroing a disk erases all the data on it, including the operating system and the directory itself. After a disk has been zeroed, it must be initialized before any data can be stored on it. Zeroing a disk can take some time; it's equivalent to re-paving the parking lot.
- *Erase*: Erasing a disk removes all the cars from the parking lot, but leaves the lines and numbers in place by writing a new directory.
- *Partition*: Divides your parking lot into smaller parking lots. Each lot can hold different kinds of cars (files). Additionally, since ProDOS parking lots can have a maximum of thirty-two million spaces, you partition large hard drives into smaller ones so that you can use the whole drive.
- *Info*: Displays information about your parking lot, er, disk.

👉 **Warning!**

The Initialize, Zero, and Partition operations erase all the data on the disk you use them on!