Date:

BT1:

```
public class Animal {
    public String makesound(){
        return "Tiếng kêu của động vật";
    }
}
public class Pig extends Animal {
    @Override
    public String makesound(){
        return "un in";
    }
}
public Class Dog extends Animal {
    @Override
    public String makesound(){
        return "gau gau";
    }
}
public class Cat extends Animal {
    @Override
    public String makesound(){
        return "meo meo";
    }
}
public Class Bird extends Animal {
    @Override
```

Scanned with CamScanner

Date:

```
    public String makesound(){
        return "chiem chiep";
    }

public class Main {
    public static void main(String[] args){
        Pig pig = new Pig("un un");
        Dog dog = new Dog("gau gau");
        Cat cat = new Cat("meo meo");
        Bird bird = new Bird("chiem chiep");
        pig.makesound();
        dog.makesound();
        cat.makesound();
        bird.makesound();
    }
}
```

Scanned with CamScanner

Date:

BT2:

```
public class XeDap {
    public void run(){
        System.out.println(" Xe dap chay bang suc nguoi. ");
    }
}
public class XeDapDien extends XeDap {
    @ Override
    public void run (){
        System.out.println("Xe dap dien chay bang dong co
                                                    dien. ");
    }
}
public class BaiTapXe {
    public static void main (String[] args){
        XeDap xeDapThuong = new XeDap ();
        XeDapDien xeDapDienMoi = new XeDapDien ();
        System.out.print(" Hanh vi cua xe dap thuong: ");
        xeDapThuong.run ();
        System.out.print (" Hanh vi cua xe dap dien: ");
        xeDapDienMoi.run ();
    }
}
```

Scanned with CamScanner

TITLE: BT3:

Date:

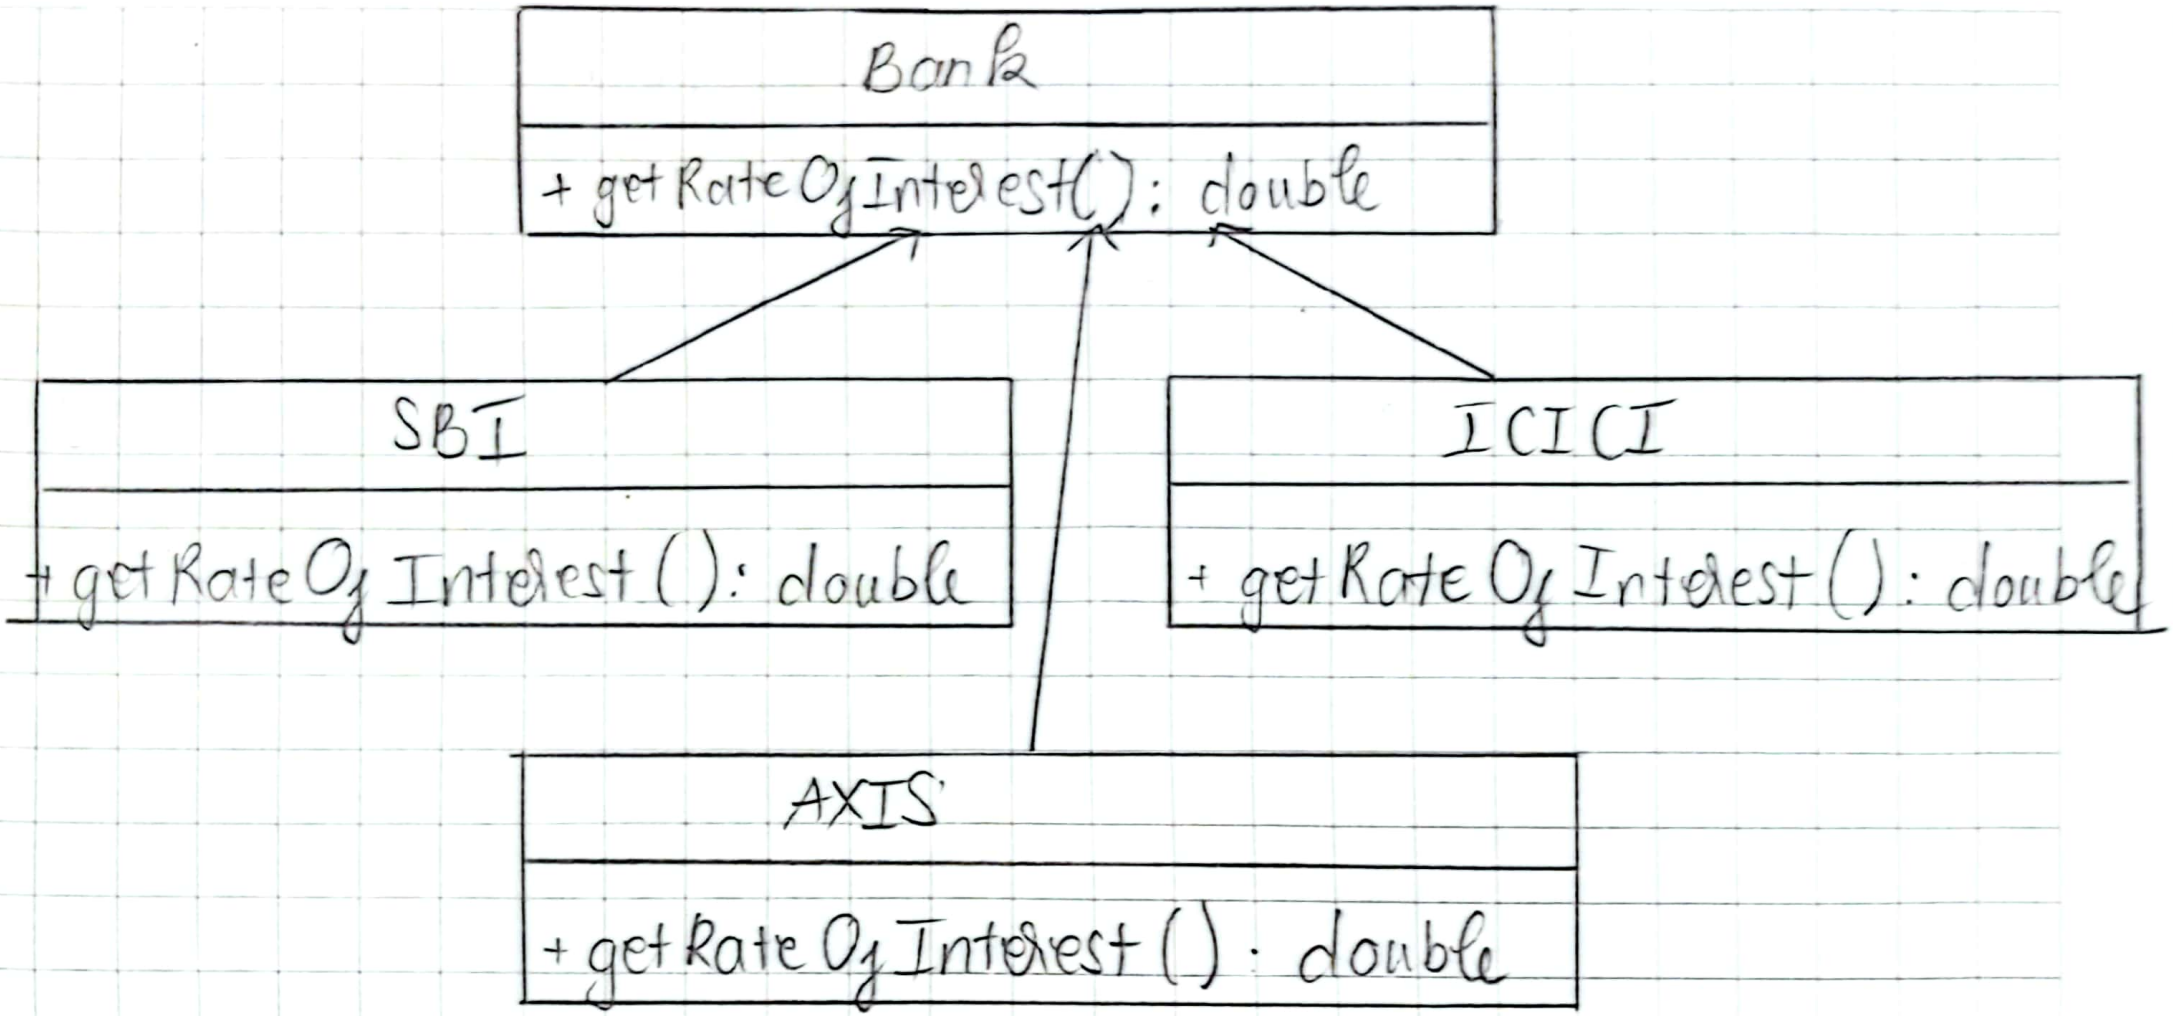

Scanned with CamScanner

BT3:

```
public class Bank {
    public double getRateOfInterest() {
        return 0;
    }
}
public class SBI extends Bank {
    @Override
    public double getRateOfInterest() {
        return 8;
    }
}
public class ICICI extends Bank {
    @Override
    public double getRateOfInterest() {
        return 7;
    }
}
public class AXIS extends Bank {
    @Override
    public double getRateOfInterest() {
        return 9;
    }
}
public class Main {
    public static void main(String[] args) {
```

Scanned with CamScanner

```
Bank b;
b = new SBI();
System.out.println("Lai suat ngan hang SBI: "
    + b.getRateOfInterest() + "%");
b = new ICICI();
System.out.println("Lai suat ngan hang ICICI: "
    + b.getRateOfInterest() + "%");
b = new AXIS();
System.out.println("Lai suat ngan hang AXIS: "
    + b.getRateOfInterest() + "%");
}
}
```

Scanned with CamScanner

BT4:

```
public class Person {
  private String name;
  private Date birthday;
  public void setName (String name) {
    this. name = name;
  }
  public void setBirthday (Date birthday) {
    this. birthday = birthday;
  }
  public String getDetails () {
    return "Name: " + name, "Birthday: " + birthday;
  }
}
public class Employee extends Person {
  private double salary;
  public void setSalary (double salary) {
    this. salary = salary;
  }
  @ Override
  public String getDetails () {
    return super. getDetails () + "Salary: " + salary;
  }
}
public class Manager extends Person {
  private Employee assistant;
  public void setAssistant (Employee assistant) {
```

Scanned with CamScanner

```
    this. assistant = assistant;
    }
    @ Override
    public String getDetails () {
        String details = super. getDetails (),
        if (assistant != null) {
            details += "Assistant: " + assistant. getDetails ();
        }
        return details;
    }
}
public class Main {
    public static void main (String[] args){
        Person p1 = new Person("Lan", new Date());
        System. out. println (p1. getDetails());
        Employee e1 = new Employee ("Employee A", new
                Date (), 50000);
        System. out. println (e1. getDetails());
        Manager m1 = new Manager ("Manager B", new Date(),
                80000);
        m1. setAssistant (e1);
        System. out. println (m1. getDetails());
    }
}
```

Scanned with CamScanner