



ANGULARJS

by Google



tiagolpadua@gmail.com



@tiagolpadua



(61) 99275-7212

DIA 1

Introdução, história das web-apps, AngularJS, Hello World ng









http://bit.ly/material_referencia

git clone https://github.com/tiagolpadua/cadastro-patrimonio-ng.git

Parte I

Introdução

A green rectangular street sign with a white border and a scalloped edge. The words "The Beginning" are written in large, white, sans-serif capital letters. The sign is mounted on a wooden post. The background is plain white.

The Beginning



EXPLORER



WORKING FILE

www.ts src



NODE-EXPRES

.vscode

node_mod

SRC

public

routes

styles

style.less

views

app.ts

tsconfig.json

tsd.d.ts

www.ts

tests

ext install

C# 181280

0.3.7 Microsoft

C# for Visual Studio Code (powered by OmniSharp).

README

LICENSE



Python 105661

0.3.7 Don Jayamanne

Linting, Debugging (multi-threaded, remote), Intellisense, auto-completion...

older

```
12 // into css files to the ./public/stylesheets folder
13 gulp.task('less', function () {
14     return gulp.src('./src/styles/**/*.less')
15         .pipe(less({ var path: any
16             paths: [path.join(__dirname, 'less', 'includes')]
17         }))
18         .pipe(gulp.dest('./src/public/stylesheets'));
19 });
20
21
22 // run mocha tests in the ./tests folder
23 gulp.task('test', function () {
24 }
```



master* 0 0 ▲ 0

Ln 16, Col 24 Spaces: 4 UTF-8 LF JavaScript



serpro@serpro-VirtualBox: ~/workspace_js/cadastro-patrimonio-ng

serpro@serpro-VirtualBox: ~/work... X serpro@serpro-VirtualBox: ~/work... X serpro@serpro-VirtualBox: ~/work... X

```
serpro@serpro-VirtualBox:~/workspace_js/cadastro-patrimonio-ng$ node --version  
v4.4.5
```

```
serpro@serpro-VirtualBox:~/workspace_js/cadastro-patrimonio-ng$ npm --version  
2.15.5
```

```
serpro@serpro-VirtualBox:~/workspace_js/cadastro-patrimonio-ng$ npm list -g --depth=0  
/usr/lib  
└── bower@1.7.9  
├── grunt@1.0.1  
├── jscs@3.0.5  
├── jshint@2.9.2  
├── npm@2.15.5  
├── tslint@3.11.0  
├── typescript@1.8.10  
└── typings@1.3.0
```

```
serpro@serpro-VirtualBox:~/workspace_js/cadastro-patrimonio-ng$ █
```

Hello



```
hello.html hello_world
```

```
1  <!DOCTYPE html>
2  <html>
3
4  <head>
5      <title>Hello World!</title>
6      <meta charset="UTF-8">
7      <script src="https://ajax.googleapis.com/ajax/libs/jquery/1.12.4/jquery.min.js"></script>
8      <script src="https://ajax.googleapis.com/ajax/libs/angularjs/1.5.6/angular.min.js"></script>
9  </head>
10
11 <body>
12     <h1 id="output"></h1>
13     <input id="input" type="text">
14 </body>
15
16 </html>
```

```
hello.jq.html hello_world
```

```
1  <!DOCTYPE html>
2  <html>
3
4  <head>
5      <script src="https://ajax.googleapis.com/ajax/libs/jquery/1.12.4/jquery.min.js"></script>
6  </head>
7
8  <body>
9      <h1 id="output"></h1>
10     <input id="input" type="text">
11     <script>
12         var input = $('#input');
13         var output = $('#output');
14         |
15         input.keyup(updateOutput);
16
17         updateOutput();
18
19         function updateOutput() {
20             console.log('Atualizando!');
21             output.text('Hello ' + input.val());
22         }
23
24     </script>
25 </body>
26
27 </html>
```

```
hello.ng.html hello_world
```

```
1  <!DOCTYPE html>
2  <html ng-app>
3
4  <head>
5      <script src="https://ajax.googleapis.com/ajax/libs/angularjs/1.5.6/angular.min.js"></script>
6  </head>
7
8  <body>
9      <h1>Hello {{texto}}</h1>
10     <input type="text" ng-model="texto">
11 </body>
12
13 </html>
```



ANGULARJS
by Google

Data Binding

MVC

Routing

Testing

jqLite

Templates

History

Factories



angularJS is a full-featured
SPA framework

ViewModel

Controllers

Views

Directives

Services

Dependency Injection

Validation

Comparar Termos de pesquisa ▾

jsf

Termo de pesquisa

aspx

Termo de pesquisa

angularjs

Termo de pesquisa


+ Adicionar termo

Interesse com o passar do tempo



Títulos das notícias


Previsão

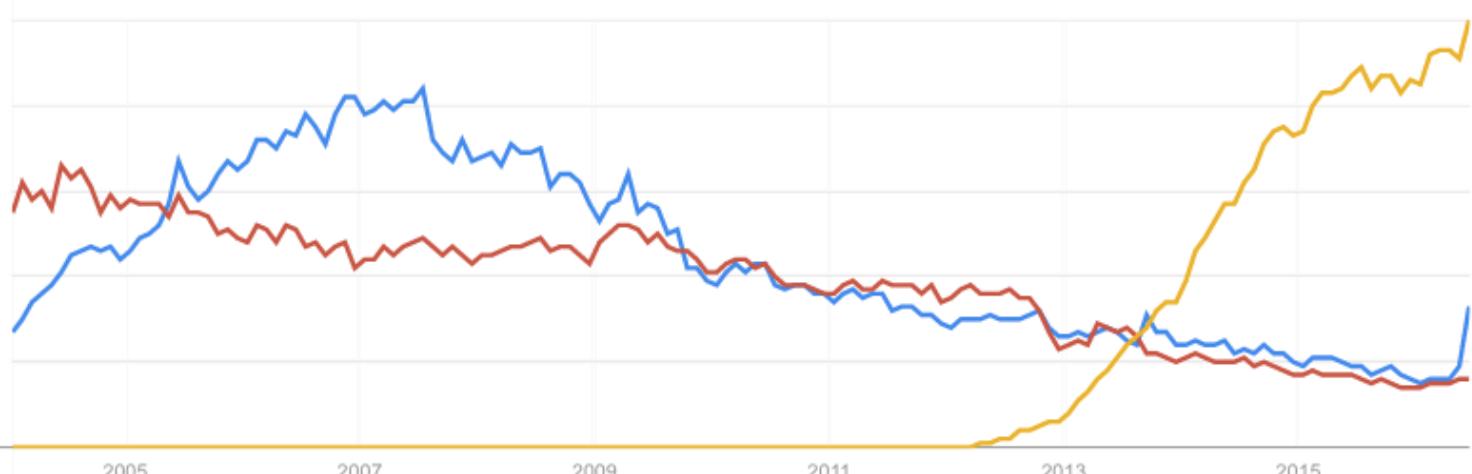


[SEE ALL](#)

Sports

NBA.com Stats

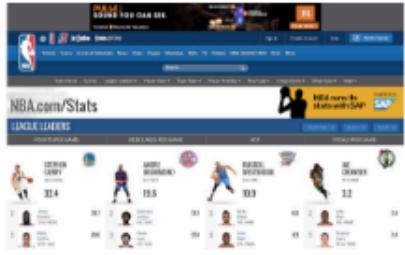


NBA Global

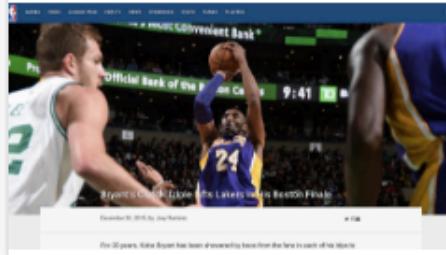

Atlantic Coast Conference



The Sports Network

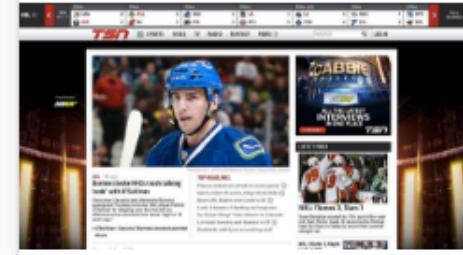[SEE ALL](#)

By Google

Google Analytics




Android Experiments



Google One Today




OnHub Makers

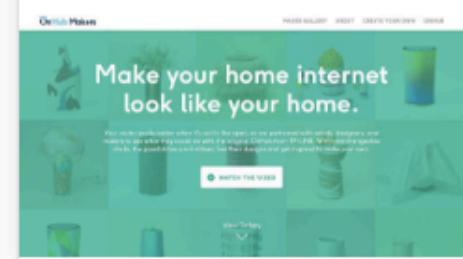[SEE ALL](#)

Weather

The Weather Channel

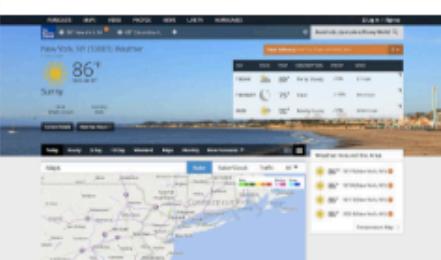

Books & Reference

SEE ALL

Apple Developer Search

This screenshot shows the Apple Developer Search interface. At the top, there's a navigation bar with links like 'Developer', 'Home', 'Search', 'Project', 'Support', and 'Member Center'. Below the navigation is a search bar with the word 'Search' typed into it. Underneath the search bar, there's a list of search results, with the first item being 'The Home Base of the Best'.

Ancestry.com

This screenshot shows the Ancestry.com homepage. It features a large search bar at the top with the placeholder 'Get Started on Ancestry'. Below the search bar, there are several sections: 'Start your family tree', 'Find your family history', 'Products & Services', and 'Help & Support'. A prominent 'Search' button is located at the bottom of the main content area.

Britannica.com

This screenshot shows the Britannica.com homepage. It features a header with the 'ENCYCLOPEDIA BRITANNICA' logo. Below the header, there's a section titled 'BRITANNICA STORIES' with various thumbnail images. A sidebar on the left contains links for 'SEARCH', 'TOPICAL INDEX', 'TOPICAL INDEX', 'TOPICAL INDEX', and 'TOPICAL INDEX'.

Amazon

This screenshot shows the Amazon homepage. At the top, there's a search bar with the placeholder 'Find what you're looking for'. Below the search bar, there are several promotional banners for different products. On the right side, there's a 'Manage Your Content and Devices' sidebar with options for 'Your Content' and 'Your Devices'.

Transportation

SEE ALL

Ford

This screenshot shows the Ford website. The main focus is a white Ford Fusion car against a purple and white background. The word 'Ford' is written in a large, cursive font above the car. There are navigation links at the top for 'Home', 'Discover & Drive', 'Technical Info', 'Buying Tools', 'News', 'Products', and 'Inquiries'.

Blue Origin

This screenshot shows the Blue Origin website. The main heading is 'SOAR WITH BLUE ORIGIN' with a subtext 'Meet an amateur aviator's cockpit view with Blue Origin'. Below the heading is a video player with a play button. The overall design is dark with blue and white elements.

Lyft

This screenshot shows the Lyft website. It features a photo of two people in a car with the text 'Rides in Minutes'. Below the photo is a pink button labeled 'Book Now' and another button labeled 'Take the wheel'. At the bottom, there's a small note: 'Want to ride? Take a look at our company, culture and mission. Request a ride on the Lyft app, and get instant service and convenience where you are.'

sUAS Registration

This screenshot shows the Small Unmanned Aircraft System (sUAS) Registration Service website. It features a drone icon and the text 'Welcome to the Small Unmanned Aircraft System (sUAS) Registration Service'. Below the text, there are buttons for 'REGISTER MY DRONE' and 'LOG IN'. A note at the bottom states: 'You are still required to operate your UAS under the law and register your aircraft with the FAA.'

Finance

SEE ALL

GoCardless

This screenshot shows the GoCardless software interface. It has a top navigation bar with 'Customers', 'Flow', 'Payments', 'Projects', and 'Jobs'. Below the navigation is a table with columns for 'Name', 'Last Name', 'Address', 'City', 'State', 'Zip', and 'Phone'. The table lists several customers, such as 'Alice Smith', 'Bob Johnson', and 'Charlie Davis'.

Alpha Bank

This screenshot shows the Alpha Bank website. It features a top navigation bar with 'ALPHA BANK', 'ALPHA BANKING', 'ALPHA MORTGAGE', and 'ALPHA INVESTMENT'. Below the navigation is a section titled 'ALPHA BANKING' with a sub-section 'ALPHA MORTGAGE'. The page includes a 'Log In' button and a 'Forgot Password?' link.

PayPal Checkout

This screenshot shows the PayPal Checkout website. It features a top navigation bar with 'PayPal.com'. Below the navigation is a large banner with the text 'At PayPal, we put people at the center of everything we do.' and a 'Get Started' button. At the bottom, there's a section titled 'Who we are'.


Wells Fargo Rewards

This screenshot shows the Wells Fargo Rewards website. It features a top navigation bar with 'Wells Fargo Rewards'. Below the navigation is a banner with a woman smiling. The page includes sections for 'My Rewards', 'Rewards', and 'Rewards'. A note at the bottom states: 'Discover exciting features that fit your lifestyle. Find the right plan for your Wells and Financial needs.'


Business

SEE ALL


Staples

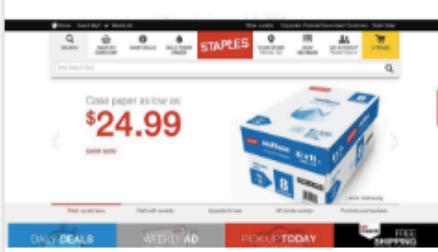


Google Insights

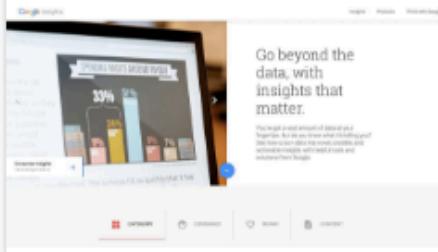

Google Trends

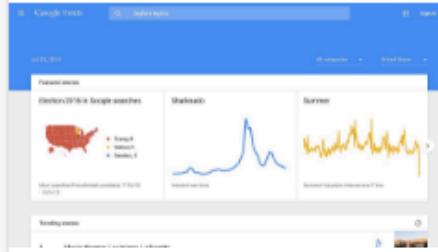


Google Careers

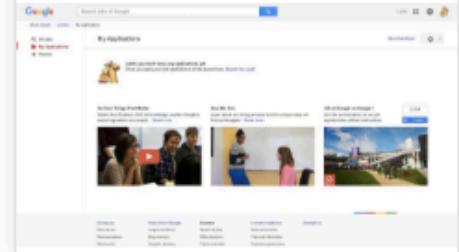

Entertainment

SEE ALL

Full Tilt

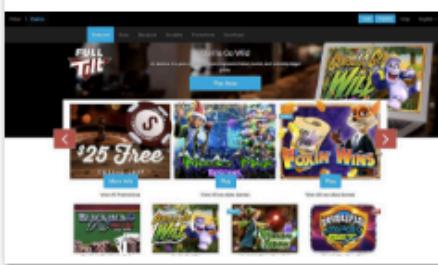

Google Star Wars



LEGO.com Star Wars



Lego



From the Community

SEE ALL

DevChat.tv




Che Armstrong



Provecta POS



SVG Circus

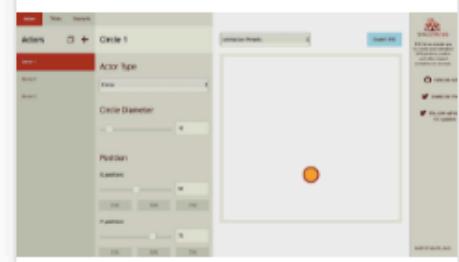



PRODUTOS E SERVIÇOS

ATENDIMENTO

SOBRE NÓS

BUSCAR


ACESSE SUA CONTA

Do que você precisa?

Estamos aqui para ajudar




Mais buscados: [carro novo](#), [ouocard](#), [renegociar minhas dívidas](#)

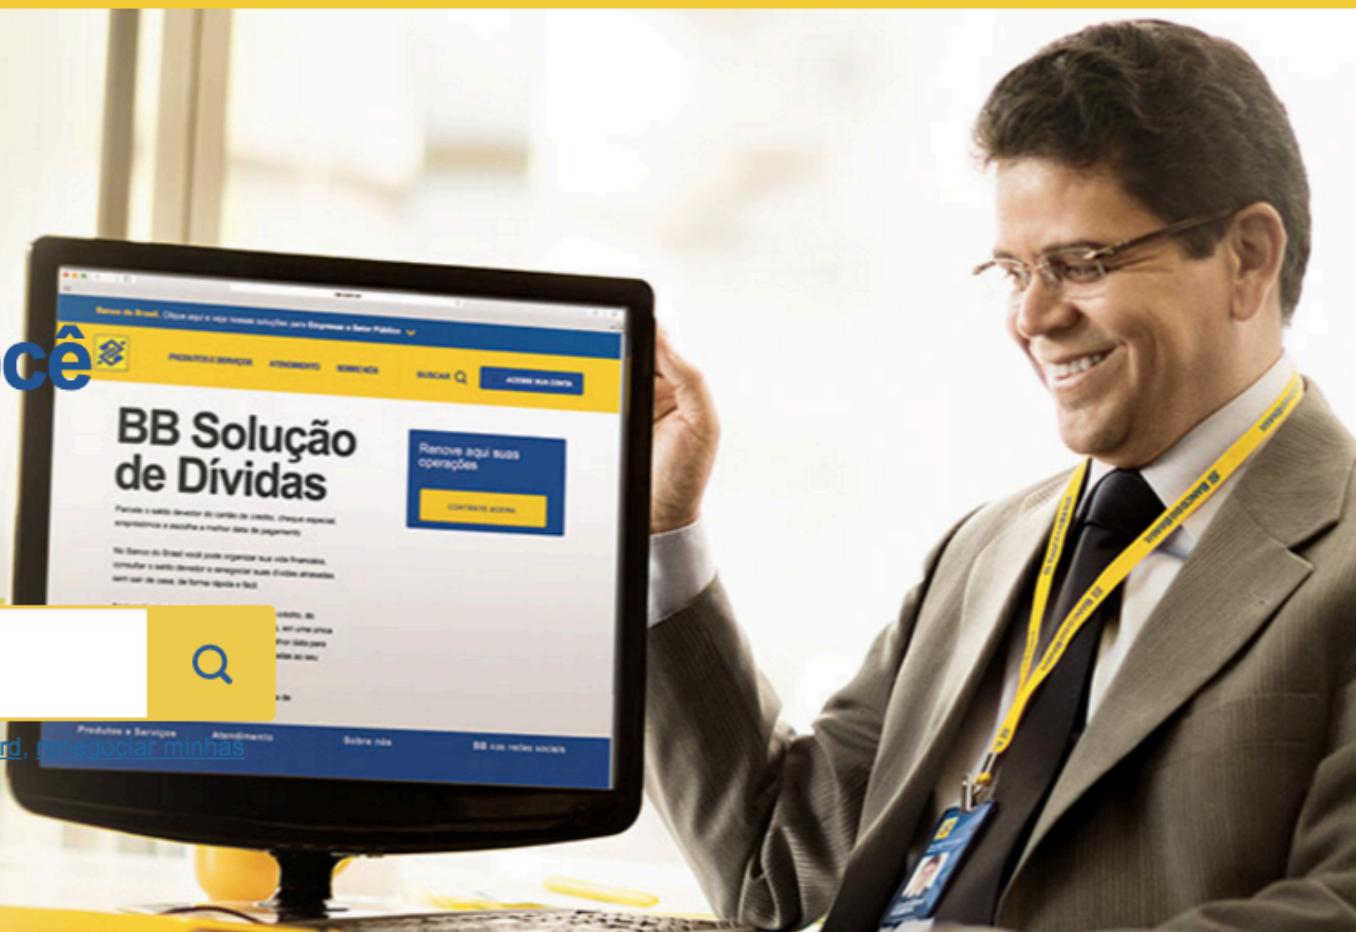

Solução de dívidas

Gerencie suas finanças sem sair de casa: consulte e renegocie suas dívidas, de forma simples e rápida

VEJA AQUI

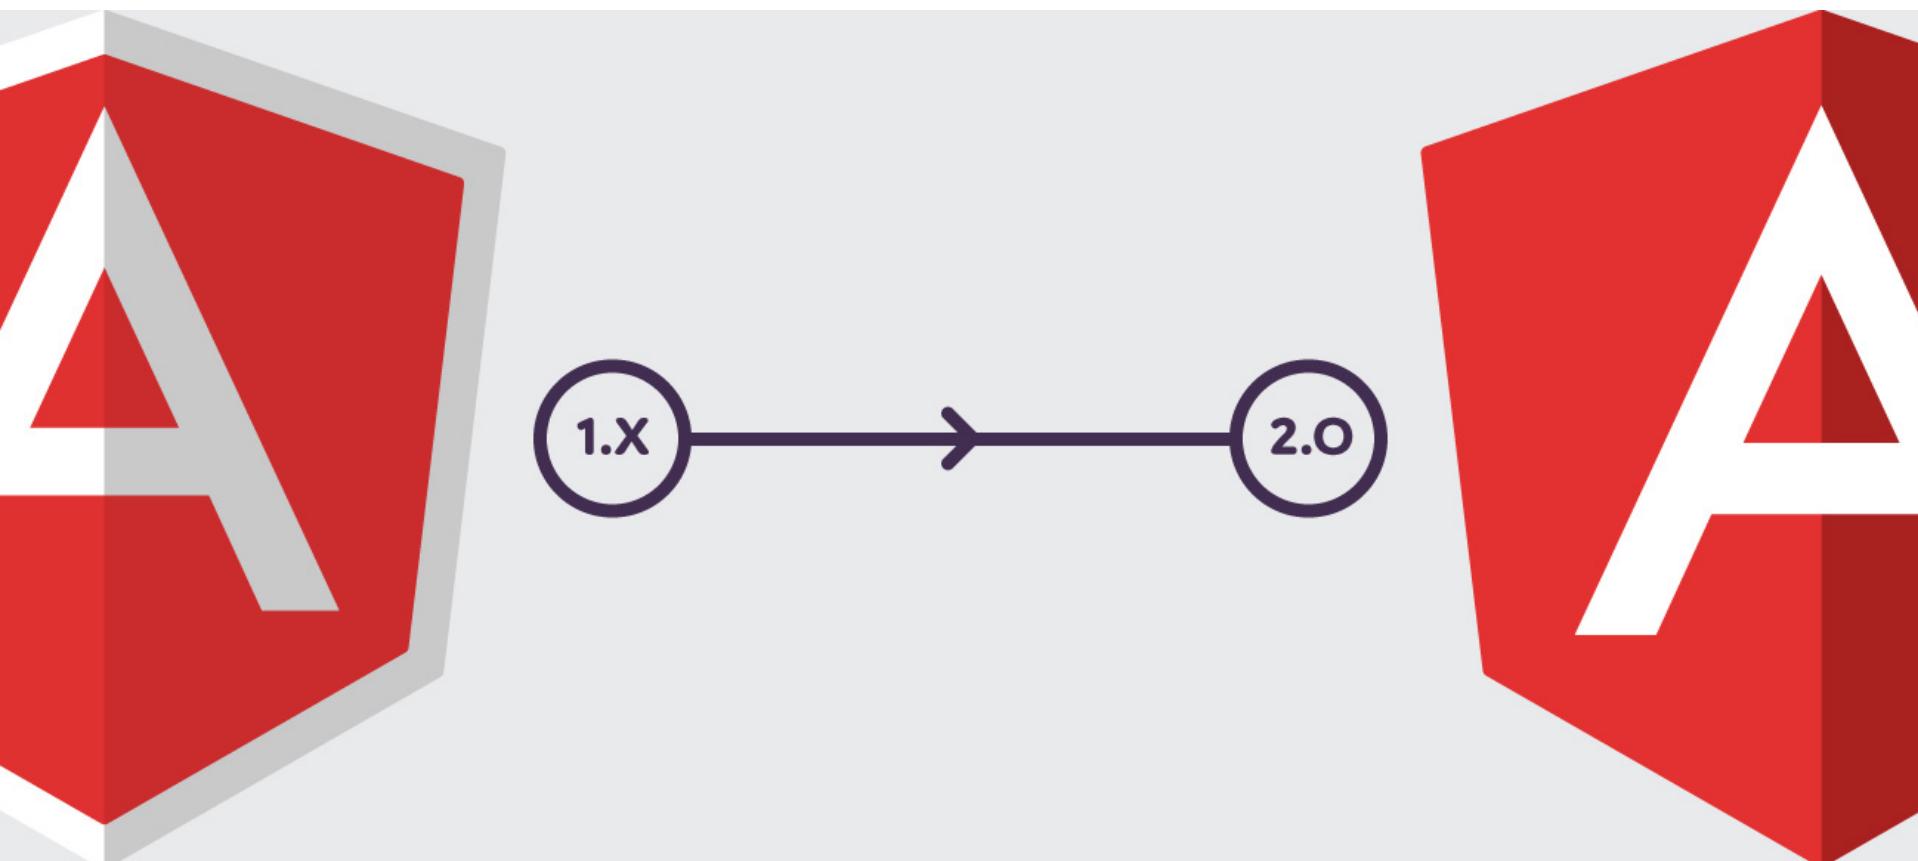

DIA 2

JavaScript

Parte II

Conhecimentos Básicos

JS

Back Forward

Home

Reload

Images

Open

Print

Find

Stop

Location: about:

[What's New!](#) [What's Cool!](#) [Handbook](#) [Net Search](#) [Net Directory](#) [Software](#)



NETSCAPE

Netscape Navigator™ Version 2.02

Copyright © 1994-1995 Netscape Communications Corporation. All rights reserved.

This software is subject to the license agreement set forth in the [license](#). Please read and agree to all terms before using this software.

Report any problems through the [feedback page](#).

Netscape Communications, Netscape, Netscape Navigator and the Netscape Communications logo are trademarks of Netscape Communications Corporation.



JAVA COMPATIBLE


Contains Java™ software developed by Sun Microsystems, Inc.
Copyright © 1992-1995 Sun Microsystems, Inc. All Rights Reserved.



Contains security software from RSA Data Security, Inc.
Copyright © 1994 RSA Data Security, Inc. All rights reserved.

This version supports International security with RSA Public Key Cryptography, MD2, MD5, RC4.

Any provision of Netscape Software to the U.S. Government is with "Restricted rights" as follows: Use, duplication or disclosure by the Government is subject to restrictions set forth in subparagraphs (a) through (d) of the Commercial Computer Restricted Rights clause at FAR 52.227-19 when applicable, or in subparagraph (c) (1) (ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.227-7013, and in similar clauses in the NASA FAR Supplement. Contractor/manufacturer is Netscape Communications Corporation, 501 East Middlefield Road, Mountain View, California, 94043.

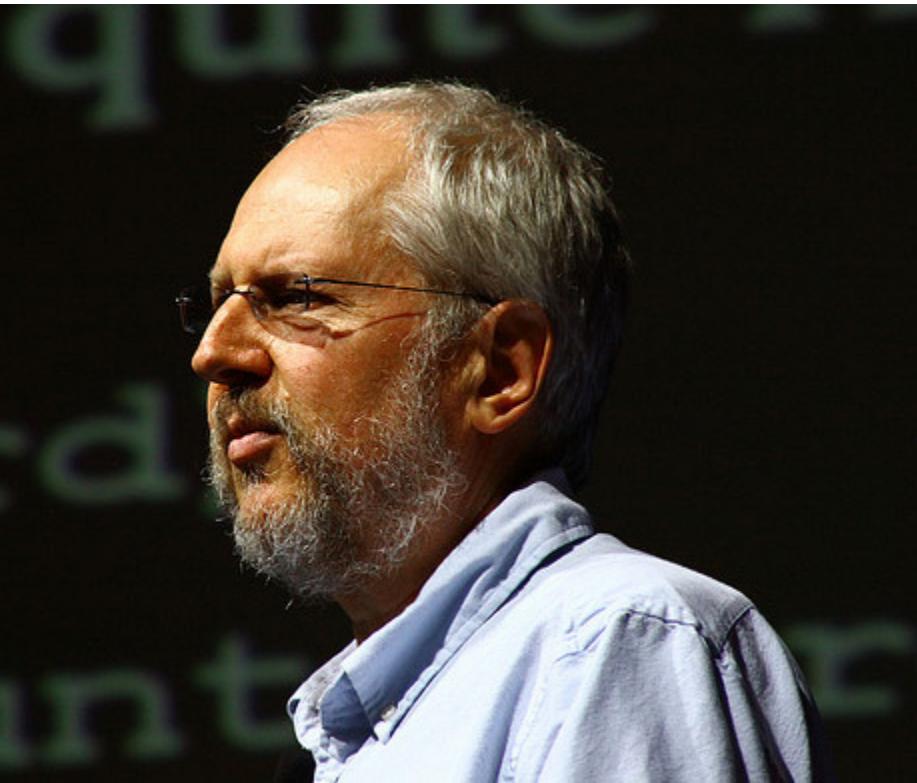

JavaScript: The Good Parts



Douglas Crockford

Compartilhada publicamente - 10 de abr de 2015

I was trying to explain to someone the difference between Java and JavaScript. "It is like the difference between Star Trek and Star Wars."

Java is Star Trek. It was first, and it is all uniforms, regulations, and red alerts.
JavaScript is Star Wars. Grit, chaos, and mysticism.

Google

https://www.google.com.br

Tiago

Gmail Imagens

2

Brasil

Pesquisa Google Estou com sorte

Publicidade Negócios Sobre Privacidade Termos Configurações

Elements Console Sources Network Timeline Profiles Resources Security Audits AngularJS

top ▾ Preserve log

Console

Google

https://www.google.com.br

Tiago

Gmail Imagens

2

Brasil

Pesquisa Google Estou com sorte

Publicidade Negócios Sobre Privacidade Termos Configurações

Elements Console Sources Network Timeline Profiles Resources Security Audits AngularJS

top ▾ Preserve log

Console

Escreva um laço de repetição que faça 7 chamadas à função console.log e imprima o triângulo abaixo:

```
#  
##  
###  
####  
#####  
######  
#######
```

```
var a = '';  
while(a.length < 7) {  
    a=a + '#'  
    console.log(a);  
}
```

Escreva uma função min que recebe dois argumentos e retorna o menor:

> console.log(min(0,10));

< 0

> console.log(min(0,-10));

< -10

```
function min(a, b) {  
    return (a < b) ? a : b;  
}
```

```
1 function makePerson(first, last) {  
2     return {  
3         first: first,  
4         last: last  
5     };  
6 }  
7 function personFullName(person) {  
8     return person.first + ' ' + person.last;  
9 }  
10 function personFullNameReversed(person) {  
11     return person.last + ', ' + person.first;  
12 }  
13  
14 s = makePerson("Simon", "Willison");  
15 personFullName(s); // "Simon Willison"  
16 personFullNameReversed(s); // "Willison, Simon"
```

```
1 function makePerson(first, last) {  
2     return {  
3         first: first,  
4         last: last,  
5         fullName: function() {  
6             return this.first + ' ' + this.last;  
7         },  
8         fullNameReversed: function() {  
9             return this.last + ', ' + this.first;  
10        }  
11    };  
12 }  
13  
14 s = makePerson("Simon", "Willison")  
15 s.fullName(); // "Simon Willison"  
16 s.fullNameReversed(); // "Willison, Simon"
```

```
1 | s = makePerson("Simon", "Willison");
2 | var fullName = s.fullName;
3 | fullName(); // undefined undefined
```

```
1 function Person(first, last) {  
2     this.first = first;  
3     this.last = last;  
4     this.fullName = function() {  
5         return this.first + ' ' + this.last;  
6     };  
7     this.fullNameReversed = function() {  
8         return this.last + ', ' + this.first;  
9     };  
10 }  
11 var s = new Person("Simon", "Willison");
```

```
1 | function Person(first, last) {  
2 |   this.first = first;  
3 |   this.last = last;  
4 | }  
5 | Person.prototype.fullName = function fullName() {  
6 |   return this.first + ' ' + this.last;  
7 | };  
8 | Person.prototype.fullNameReversed = function fullNameReversed() {  
9 |   return this.last + ', ' + this.first;  
10|};
```

```
1 var s = "Simon";
2 s.reversed(); // TypeError on line 1: s.reversed is not a function
3
4 String.prototype.reversed = function reversed() {
5     var r = "";
6     for (var i = this.length - 1; i >= 0; i--) {
7         r += this[i];
8     }
9     return r;
10};
11
12 s.reversed(); // nomiS
```

Escreva uma função que recebe um argumento e retorna este argumento

```
<- identity(5)  
-> 5
```

```
function identity(x) {  
  return x;  
}
```

Escreva duas funções que recebem dois argumentos, uma retorna a soma e a outra o produto

-> add(1, 3)

<- 4

-> mul(2, 3)

<- 6

```
function add(x, y) {  
    return x + y;  
}
```

```
function mul(x, y) {  
    return x * y;  
}
```

Escreva uma função que recebe um argumento e retorna uma função que retorna este argumento

-> identityf(5)();

<- 5

```
function identityf(x) {  
  return function() {  
    return identity(x);  
  };  
}
```

Escreva uma função que soma com duas invocações:

-> addf(5)(6)

<- 11

```
function addf(x) {  
  return function(y) {  
    return add(x, y);  
  };  
}
```

Escreva uma função que recebe uma função binária e a aciona após duas invocações:

```
-> var app = applyf(add)
```

```
-> app(5)(6);
```

```
<- 11
```

```
function applyf(f) {  
  return function(x) {  
    return function(y) {  
      return f(x, y);  
    };  
  };  
}
```

Utilizando a função ‘forEach’, imprima cada um dos elementos do array ‘a’ multiplicado por 2:

-> var a = [1, 2, 3, 4, 5, 6, 7, 8, 9, 10]

```
5  console.log('Multiplicados por 2');
6  a.forEach(function (n) {
7      console.log(n*2);
8  });
```

Utilizando a função ‘map’, crie um novo array ‘quad’ onde cada elemento é o quadrado ($n \times n$) de cada elemento de ‘a’

-> var a = [1, 2, 3, 4, 5, 6, 7, 8, 9, 10]

<- quad // [1, 4, 9, 16, 25, 36, 49, 64, 81, 100]

```
10  console.log('Quadrados');
11  var quad = a.map(function (n) {
12      return n*n;
13  });
14  console.log(quad);
```

Utilizando a função ‘filter’, crie um novo array ‘ímpar’ que possui os elementos ímpares de ‘a’:

-> var a = [1, 2, 3, 4, 5, 6, 7, 8, 9, 10]

<- ímpar // [1, 3, 5, 7, 9]

```
console.log('Ímpares');
var ímpar = a.filter(function (n) {
    return n % 2 === 1;
});
console.log(ímpar);
```

Utilizando a função ‘reduce’, crie uma variável ‘soma’ que é a soma dos elementos de ‘a’:

-> var a = [1, 2, 3, 4, 5, 6, 7, 8, 9, 10]

<- soma //55

```
console.log('Soma');
var soma = a.reduce(function (anterior, atual) {
    return anterior + atual;
}, 0);
console.log(soma);
```

Crie um a variável ‘somaPar’ que é a soma dos elementos pares de ‘a’:

-> var a = [1, 2, 3, 4, 5, 6, 7, 8, 9, 10]
<- soma //30

```
console.log('Soma Pares');
var somaPar = a
.filter(function (n) {
    return n % 2 === 0;
})
.reduce(function (anterior, atual) {
    return anterior + atual;
}, 0);
console.log(somaPar);
```

DIA 3

full-stack JS, controllers

Cadastro Patrimônio

Funcionalidades

- Listar os bens cadastrados;
- Filtrar a lista de bens;
- Detalhar um bem cadastrado;
- Cadastrar um novo bem;
- Alterar um bem cadastrado;
- Remover um bem cadastrado;

Listagem de Bens

Lista dos bens cadastrados de: Barão de Mauá

Busca:

[Novo Bem](#)



Bem ID: I6bjUTXbYhv7V08d



[Palácio dos Buritis, sede do GDF](#)

Tipo: imovel

[Mais Detalhes](#)

[Alterar](#)

[Excluir](#)

Cadastro de Novo Bem

URL Foto

URL Foto

Descrição

Descrição

Móvel Imóvel

Salvar

Cancelar

Alterando o Bem: l6bjUTXbYhv7V08d

URL Foto

<http://bit.ly/imgburiti>

Descrição

Palácio dos Buritis, sede do GDF

Móvel Imóvel

Salvar


Cancelar



ANGULARJS

by Google

Client



express

Server



Database



NodeJS

```
> sudo apt-get purge nodejs npm  
  
> sudo apt-get install -y build-essential  
  
> curl  
-sL https://deb.nodesource.com/setup_4.x  
| sudo -E bash -  
  
> sudo apt-get install -y nodejs  
  
> node --version  
< v4.4.5  
  
> npm --version  
< 2.15.5
```

Estrutura de Pastas da Aplicação

The screenshot shows the Visual Studio Code (VS Code) interface with a dark theme. The left sidebar (Explorer) lists the project structure:

- WORKING FILES
- CADASTRO-PATRIMONIO-NG
 - client
 - index.html
 - node_modules
 - server
 - app
 - api
 - index.js
 - routes
 - index.js
 - config
 - database.js
 - express.js
 - data.db
 - server.js
 - test
 - .editorconfig
 - .gitignore
 - .jscsrc
 - .jshintrc
 - LICENSE
 - package.json
 - README.md

```
1      "version": "0.1.0",
2      "name": "cadastro-patrimonio-ng",
3      "description": "Aplicação Exemplo de Cadastro de Patrimônio em AngularJS",
4      "license": "MIT",
5      "scripts": {
6          "start": "node server/server.js"
7      },
8      "dependencies": {
9          "body-parser": "^1.15.1",
10         "express": "^4.14.0",
11         "nedb": "1.8.0"
12     }
13 }
14 }
15 }
```

Overview do Backend

server.js server


```
1 var http = require('http'),  
2     app = require('./config/express'),  
3     db = require('./config/database');  
4  
5 http.createServer(app).listen(3000, function () {  
6     console.log('Servidor escutando na porta: ' + this.address().port);  
7 });  
8
```

database.js server/config

```
1  var Datastore = require('nedb'),
2      dbName = 'server/data.db',
3      db;
4
5  if (!db) {
6      db = new Datastore({
7          filename: dbName,
8          autoload: true
9      });
10     console.log('Banco ' + dbName + ' pronto para uso');
11 }
12
13 module.exports = db;
```

express.js server/config

```
1 var express = require('express'),  
2     app = express(),  
3     bodyParser = require('body-parser'),  
4     routes = require('../app/routes');  
5  
6 app.use(express.static('./client_gabarito'));  
7 //app.use(express.static('./client_exercicios'));  
8 app.use(bodyParser.urlencoded({extended: true}));  
9 app.use(bodyParser.json());  
10  
11 routes(app);  
12  
13 module.exports = app;
```

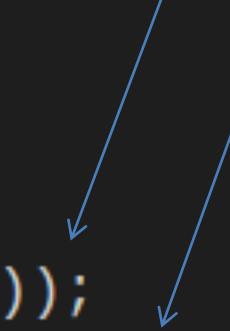

index.js server/app/routes

```
1  var api = require('../api'),  
2      path = require('path');  
3  
4  module.exports = function (app) {  
5  
6      app.route('/api/v1/bens')  
7          .post(api.adiciona)  
8          .get(api.lista);  
9  
10     app.route('/api/v1/bens/:bemId')  
11         .delete(api.remove)  
12         .get(api.busca)  
13         .put(api.atualiza);  
14  
15     app.get('/api/v1/tipos', api.listaTipos);  
16     app.get('/api/v1/bens/tipo/:tipoId', api.listaPorTipo);  
17  
18     // habilita o HTML5MODE  
19     app.all('*', function (req, res) {  
20         res.sendFile(path.resolve('client_gabarito/index.html'));  
21     });  
22 };
```

```
1  var db = require('../config/database');
2
3  var api = {};
4
5  api.adiciona = function (req, res) {
6      db.insert(req.body, function (err, newDoc) {
7          if (err) {
8              return console.log(err);
9          }
10         console.log('Adicionado com sucesso: ' + newDoc._id);
11         res.json(newDoc._id);
12     });
13 };
14
15 api.busca = function (req, res) {
16     db.findOne({
17         _id: req.params.bemId
18     }, function (err, doc) {
19         if (err) {
20             return console.log(err);
21         }
22         res.json(doc);
23     });
24 };
```

Uma tela simples para testar o
servidor

- index.html client_gabarito

```
1  <!DOCTYPE html>
2  <html lang="pt-br">
3
4  <head>
5    <title>Cadastro de Patrimônio</title>
6    <meta charset="UTF-8">
7  </head>
8
9  <body>
10   <h1>Olá Cadastro de Patrimônio</h1>
11  </body>
12
13 </html>
```

Transformando um html em uma view
AngularJS

```
index.html client_gabarito
```

```
1  <!DOCTYPE html>
2  | <html lang="pt-br" ng-app="cadpat">1
3
4  | <head>
5    |   <title>Cadastro de Patrimônio</title>
6    |   <meta charset="UTF-8">
7    |   <script src="bower_components/angular/angular.js"></script>4
8    |   <script src="app/app.module.js"></script> 5
9  | </head>
10 |3
11 | <body ng-controller="ListagemController">
12 |   <h1>Olá Cadastro de Patrimônio</h1>
13 |   
    <h1>Olá Cadastro de Patrimônio!</h1>
    
    
39     <h1>Olá Cadastro de Patrimônio!</h1>
40     
41 </body>
```

Um pouco de Bootstrap para melhorar
a exibição da aplicação

```
<!-- jQuery -->
<script src="bower_components/jquery/dist/jquery.min.js"></script>

<!-- Bootstrap -->
<link href="bower_components/bootstrap/dist/css/bootstrap.min.css" rel="stylesheet">
<script src="bower_components/bootstrap/dist/js/bootstrap.min.js"></script>
```

File: angular.html

```
24 <body ng-controller="ListagemController">
25     <div class="container">
26         <div class="page-header">
27             <h1>Listagem de Bens</h1>
28         </div>
29         <div ng-repeat="foto in fotos" class="row">
30             <div class="col-md-3">
31                 <a class="thumbnail">
32                     
33                 </a>
34             </div>
35         </div>
36     </div>
37 </body>
' style="height:300px; margin:0 auto;">
```



```
1 angular.module('cadpat', [])
2   .controller('ListagemController', function ($scope) {
3     $scope.bens = [
4       {
5         descricao: 'Prédio do Banco Central do Brasil – BACEN',
6         urlFoto: 'http://bit.ly/imgbacen'
7       },
8       {
9         descricao: 'Palácio dos Buritis, sede do GDF',
10        urlFoto: 'http://bit.ly/imgburiti'
11      },
12      {
13        descricao: 'Câmara dos deputados do DF',
14        urlFoto: 'http://bit.ly/imgcamara'
15      }
16    ];
17  });

```

```
24  <body ng-controller="ListagemController">
25      <div class="container">
26          <div class="page-header">
27              <h1>Listagem de Bens</h1>
28          </div>
29          <div ng-repeat="bem in bens" class="row">
30              <div class="col-md-3">
31                  <a class="thumbnail">
32                      
33                      <div class="caption">
34                          <h3>{{bem.descricao}}</h3>
35                      </div>
36                  </a>
37              </div>
38          </div>
39      </div>
40  </body>
```

```
24 <body ng-controller="ListagemController">
25     <div class="container">
26         <div class="page-header">
27             <h1>Listagem de Bens</h1>
28         </div>
29         <div class="row">
30             <!-- Barra Lateral -->
31             <div class="col-md-2">
32                 Busca: <input ng-model="criterio">
33             </div>
34
35             <!-- Conteúdo -->
36             <div class="col-md-10">
37                 <div ng-repeat="bem in bens | filter:criterio" class="row">
38                     <div class="col-md-3">
39                         <a class="thumbnail">
40                             
41                             <div class="caption">
42                                 <h3>{{bem.descricao}}</h3>
43                             </div>
44                         </a>
45                     </div>
46                 </div>
47             </div>
48         </div>
49     </div>
50 </body>
```

```
24  <body ng-controller="ListagemController">
25      <div class="container">
26          <div class="page-header">
27              <h1>Listagem de Bens</h1>
28          </div>
29          <div class="row">
30              <!-- Barra Lateral -->
31              <div class="col-md-2">
32                  Busca: <input ng-model="criterio">
33              </div>
34
35              <!-- Conteúdo -->
36              <div class="col-md-10">
37                  <div ng-repeat="bem in bens | filter:criterio" class="row">
38                      <div class="col-md-3">
39                          <a class="thumbnail">
40                              
41                              <div class="caption">
42                                  <h3 ng-bind="bem.descricao"></h3>
43                              </div>
44                          </a>
45                      </div>
46                  </div>
47              </div>
48          </div>
49      </div>
50  </body>
51  |
52 </html>
```

Listagem de Bens

Busca:




**Prédio do
Banco Central
do Brasil -
BACEN**




**Palácio dos
Buritis, sede do
GDF**



MVC - MVVM - MVW

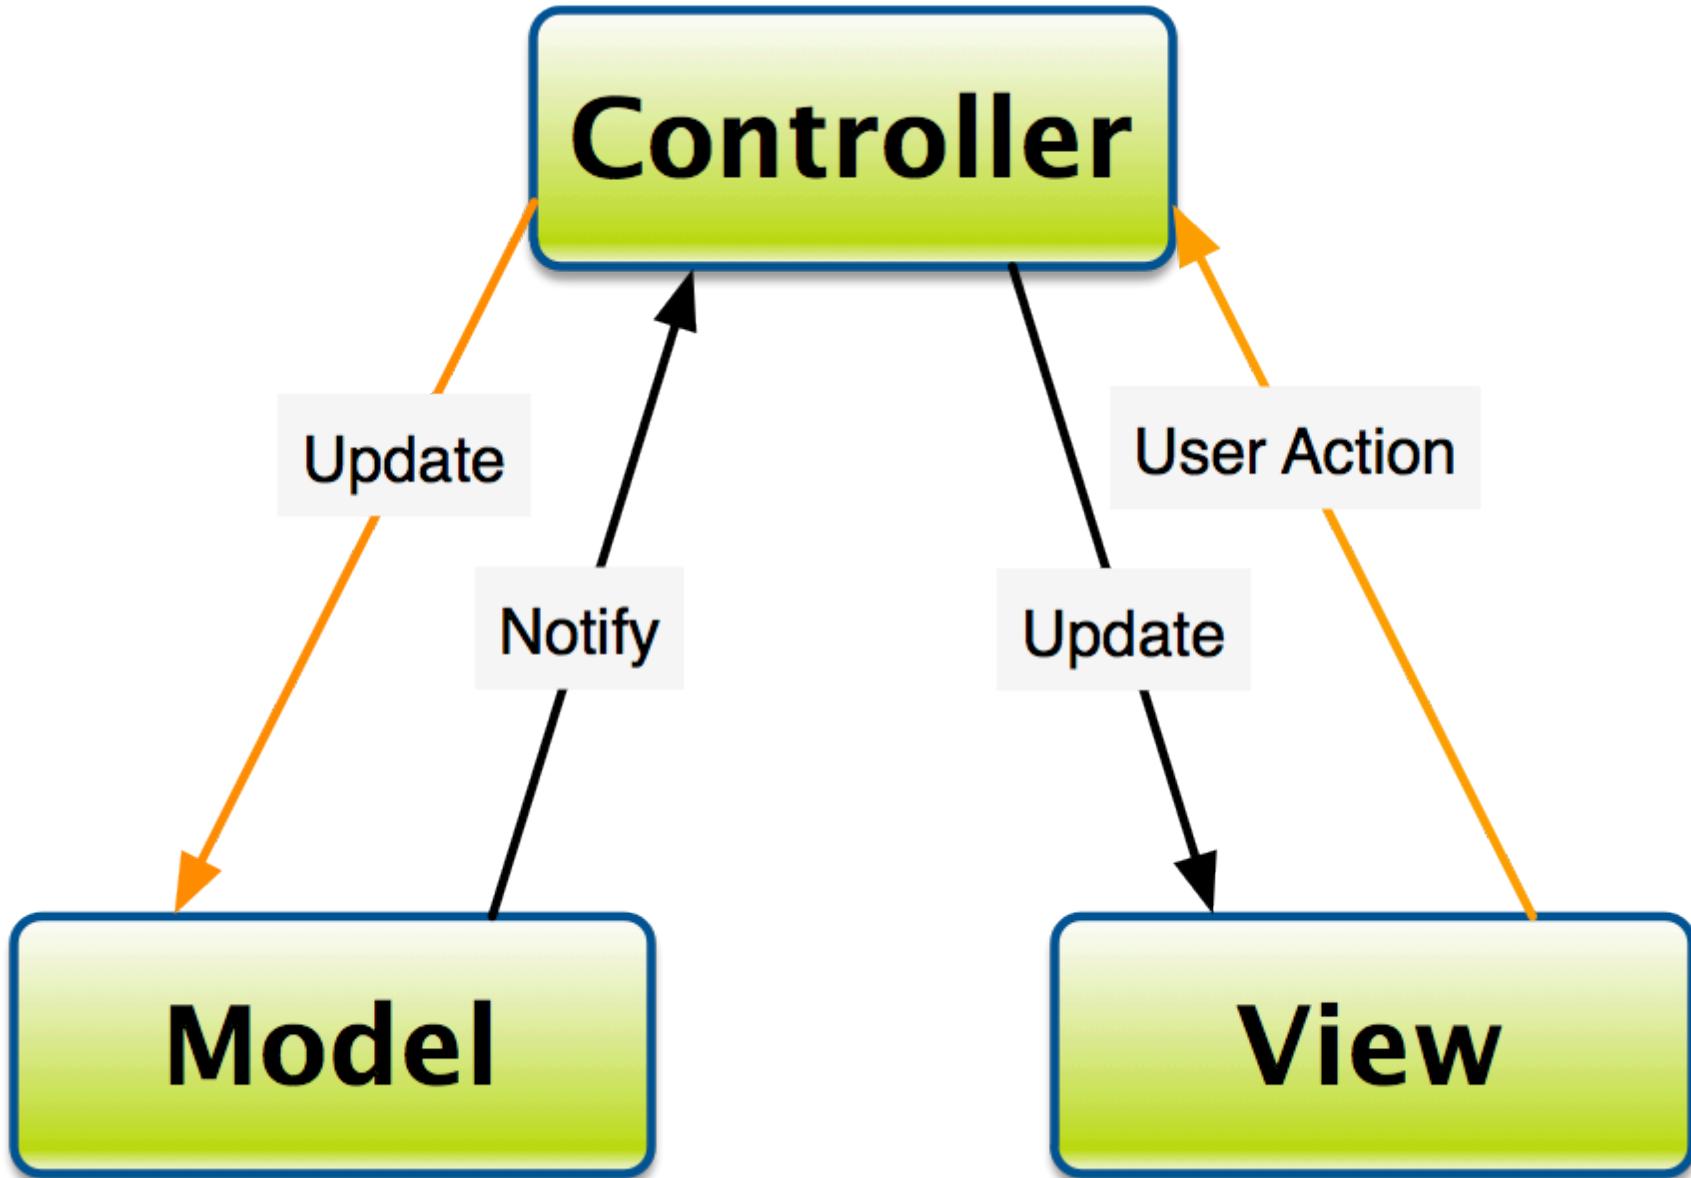

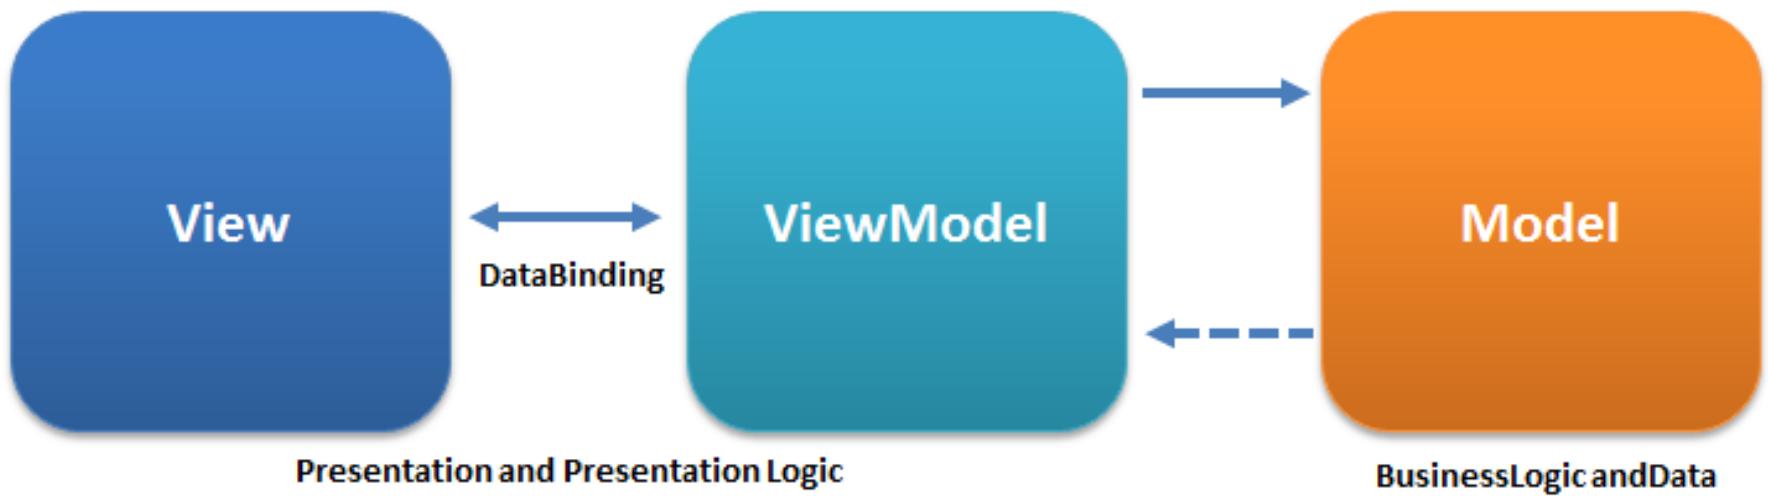

DIA 4

Ferramentas de Debug para o AngularJS

localhost:3000/bens



Busca:

div.row::before 0px x 0px

Novo Bem



Bem ID: l6bjUTXbYhv7V08d

Elements Console Sources Network Timeline Profiles Resources Security Audits AngularJS

07

```
<!-- Conteúdo -->
<div class="col-md-10">
  <div class="row">
    <div class="col-md-6">
      <div ng-mouseenter="pause()" ng-mouseleave="play()" class="carousel ng-isolate-scope" ng-swipe-right="prev()" ng-swipe-left="next()" active="0">
        <div class="carousel-inner" ng-transclude>
          <!-- ngRepeat: bem in vm.bens -->
          <div ng-class="{
            'active': active
          }" class="item text-center ng-scope ng-isolate-scope" ng-transclude ng-repeat="bem in vm.bens" index="$index" style="...</div>
          <!-- end ngRepeat: bem in vm.bens -->
        <div ng-class="{
          'active': active
        }" class="item text-center ng-scope ng-isolate-scope active" ng-transclude ng-repeat="bem in vm.bens" index="$index" style=">
          
      </div>
    </div>
  </div>
</div>
```

Styles

Filter


Computed Event Listeners

+ .cls

Listagem de Bens

Lista dos bens cadastrados de: Chico Buarque

Busca:

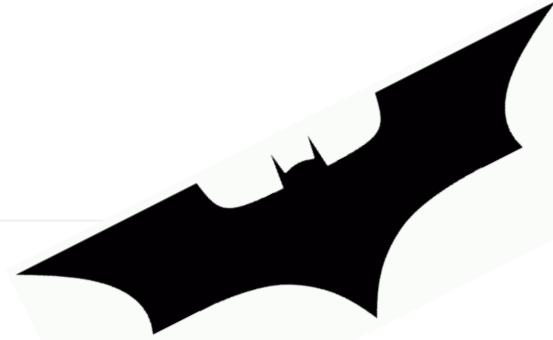Novo Bem

Elements Console Sources Network Timeline Profiles Resources Security Audits AngularJS

AngularJS

Enable

Scopes

Hints

Performance (Alpha)

```
<ng-app="cadpat">
  <ng-controller="AlertaController as vm">
    <scope.$id=3>
      <scope.$id=4>
        <scope.$id=5>
        <scope.$id=6>
        <scope.$id=7>
          <scope.$id=8>
        <scope.$id=19>
        <scope.$id=20>
          <ng-repeat="slide in slides | orderBy:indexOfSlide track by $index"
            <scope.$id=92>
          <ng-repeat="slide in slides | orderBy:indexOfSlide track by $index"
          <ng-repeat="slide in slides | orderBy:indexOfSlide track by $index"
          <ng-repeat="slide in slides | orderBy:indexOfSlide track by $index"
          <ng-repeat="slide in slides | orderBy:indexOfSlide track by $index"
        <scope.$id=21>
          <ng-repeat="bem in vm.bens">
            <scope.$id=55>
            <scope.$id=56>
            <ng-repeat="bem in vm.bens">
              <scope.$id=57>
              <scope.$id=58>
            <ng-repeat="bem in vm.bens">
              <scope.$id=59>
```

Models

- \$id: 84
- slide:
 - slide:
 - \$id: 55
 - index: 0
 - active: false
 - direction: "next"
 - element:
 - 0: Object
 - context:
 - jQuery224098724380246491952:
 - \$scope:
 - \$id: 35
 - bem: Object
 - \$index: 0
 - \$first: true
 - \$last: false
 - \$middle: false
 - \$even: true
 - \$odd: false
 - \$isolateScope:

Seguindo o guia de estilo de código de
John Papa

cadastro-patrimonio-ng/client/app/app.module.js

```
1 (function() {
2     'use strict';
3
4     angular.module('cadpat', ['bemControllers']);
5 })();
```

cadastro-patrimonio-ng/client/app/bem/bem.controllers.js

```
1 (function() {
2     'use strict';
3
4     angular
5         .module('bemControllers', [])
6         .controller('ListagemController', ListagemController);
7
8     ListagemController.$inject = [];
9     function ListagemController() {
10         var vm = this;
11         activate();
12
13         ///////////////////
14         function activate() {
15             vm.bens = [
16                 {
17                     descricao: 'Prédio do Banco Central do Brasil – BACEN',
18                     urlFoto: 'http://bit.ly/imgbacen'
19                 },
20                 {
21                     descricao: 'Palácio dos Buritis, sede do GDF',
22                     urlFoto: 'http://bit.ly/imgburiti'
23                 },
24                 {
25                     descricao: 'Câmara dos deputados do DF',
26                     urlFoto: 'http://bit.ly/imgcamara'
27                 }
28             ];
29         }
30     }
31 })(());
```

```
25 <body ng-controller="ListagemController as vm">
26     <div class="container">
27         <div class="page-header">
28             <h1>Listagem de Bens</h1>
29         </div>
30         <div class="row">
31             <!-- Barra Lateral -->
32             <div class="col-md-2">
33                 Busca: <input ng-model="criterio">
34             </div>
35
36             <!-- Conteúdo -->
37             <div class="col-md-10">
38                 <div ng-repeat="bem in vm.bens | filter:criterio" class="row">
39                     <div class="col-md-3">
40                         <a class="thumbnail">
41                             
43                                 <h3 ng-bind="bem.descricao"></h3>
44                             </div>
45                         </a>
46                     </div>
47                 </div>
48             </div>
49         </div>
50     </div>
51 </body>
```


Buscando dados no servidor

```
8 | ListagemController.$inject = ['$http'];
9 | function ListagemController($http) {
10 |     var vm = this;
11 |
12 |     activate();
13 |
14 |     ///////////////////
15 |
16 |     function activate() {
17 |         vm.bens = $http.get('/api/v1/bens');
18 |     }
19 | }
```

```
8 | ListagemController.$inject = ['$http', '$window'];
9 | function ListagemController($http, $window) {
10|     var vm = this;
11|
12|     activate();
13|
14|     ///////////////////
15|
16|     function activate() {
17|         var promise = $http.get('/api/v1/bens');
18|         promise.then(function(response) {
19|             vm.bens = response.data;
20|         })
21|         .catch(function(error) {
22|             $window.alert(error);
23|         });
24|     }
25| }
26| })();
```

```
8 | ListagemController.$inject = ['$http', '$window'];
9 | function ListagemController($http, $window) {
10 |     var vm = this;
11 |
12 |     activate();
13 |
14 |     ///////////////////
15 |
16 |     function activate() {
17 |         $http.get('/api/v1/bens')
18 |             .success(function(response) {
19 |                 vm.bens = response;
20 |             })
21 |             .error(function(error) {
22 |                 $window.alert(error);
23 |             });
24 |     }
25 | }
```

Two-Way Data Binding

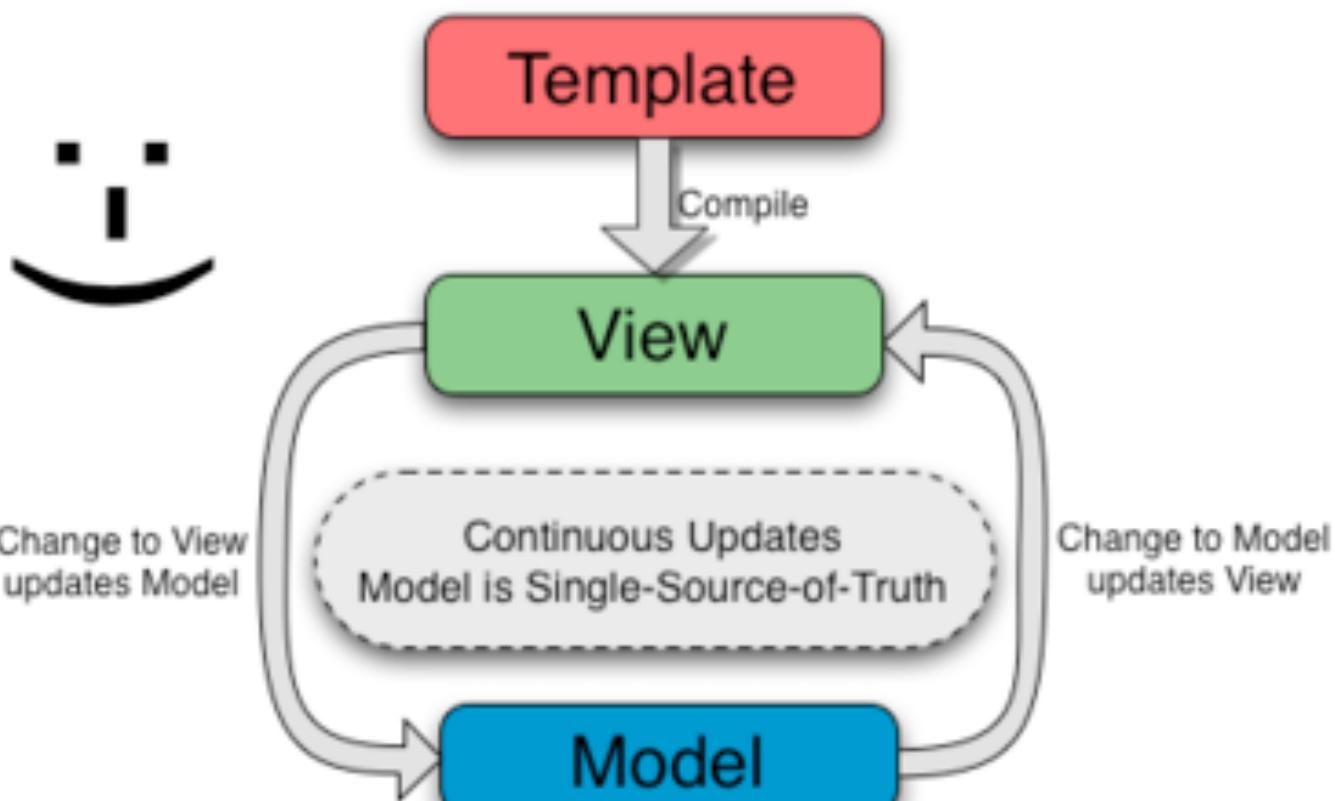

DIA 5

TypeScript


Parte III

Módulos, Serviços e


Roteamento

O que é uma SPA

Traditional Page Lifecycle

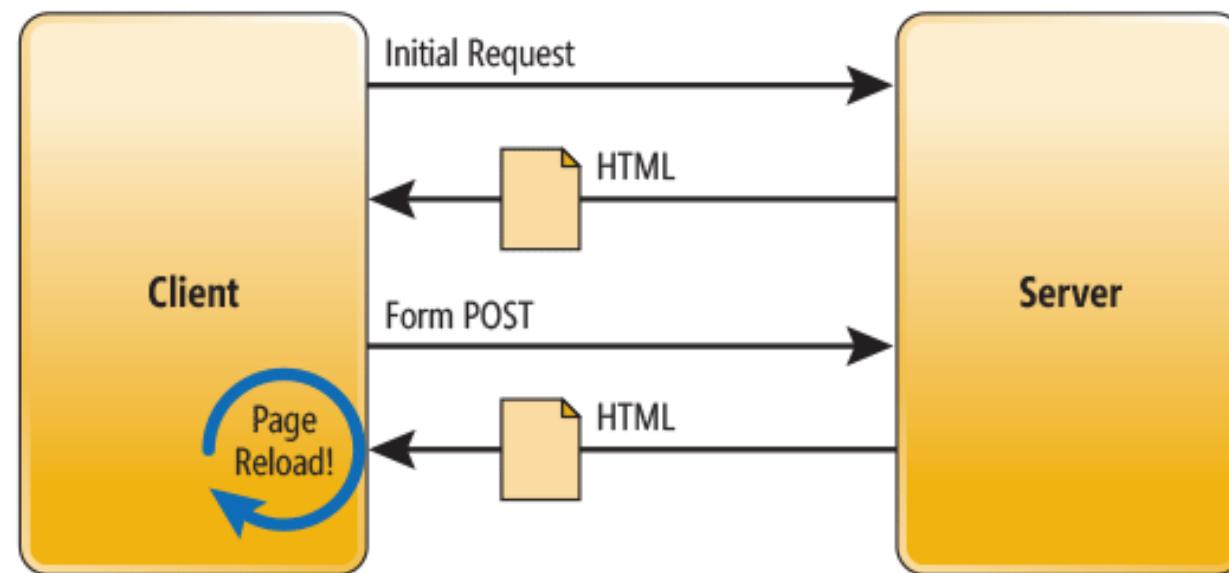


SPA Lifecycle

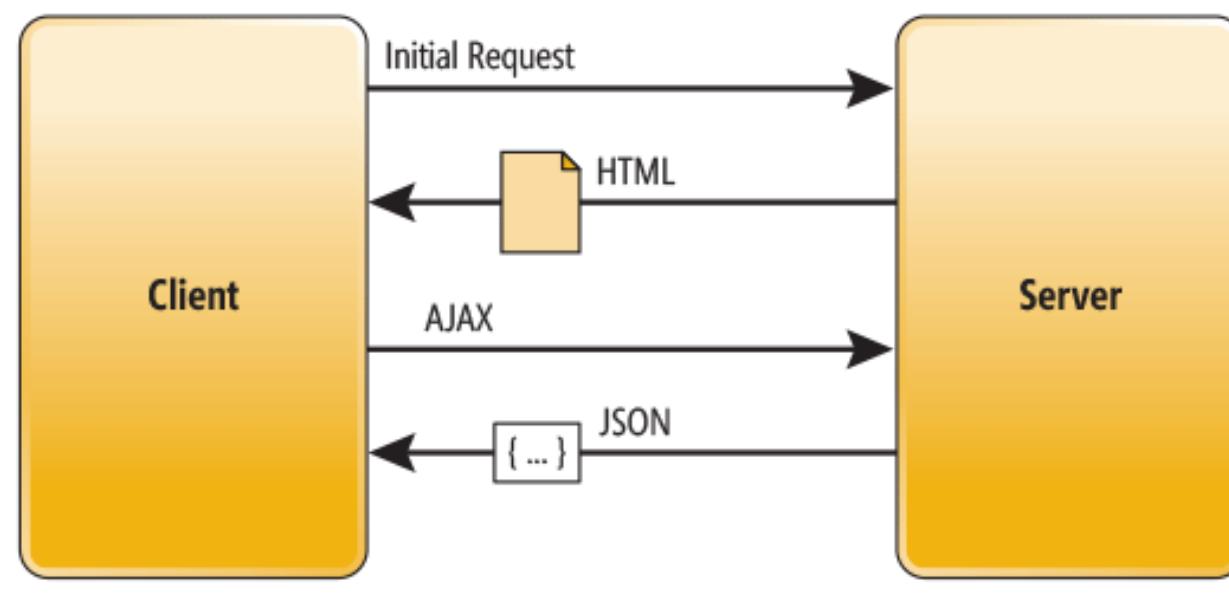

Trabalhando com rotas e partials

```
17    <!-- angular -->
18    <script src="bower_components/angular/angular.js"></script>
19    <script src="bower_components/angular-route/angular-route.js"></script>
20    <script src="app/app.module.js"></script>
21    <script src="app/app.config.js"></script> ←
22    <script src="app/bem/bem.controllers.js"></script>
23    <link href="styles/app.css" rel="stylesheet">
24
25  </head>
26
27  <body>
28    <div class="container" ng-view>
29    </div>
30  </body>
31
32  </html>
```



```
1 (function (angular, undefined) {  
2     'use strict';  
3     angular.module('cadpat', [  
4         'ngRoute', ←  
5         'bemControllers'  
6     ]);  
7 })(angular);
```

```
app.config.js client/app
1  (function (angular, undefined) {
2      'use strict';
3
4      angular.module('cadpat')
5          .config(config);
6
7      config.$inject = ['$routeProvider'];
8      function config($routeProvider) {
9          $routeProvider
10             .when('/bens', {
11                 templateUrl: 'app/bem/bem-lista.html',
12                 controller: 'ListagemController',
13                 controllerAs: 'vm'
14             })
15             .otherwise({
16                 redirectTo: '/bens'
17             });
18     }
19 })(angular);
```

bem-lista.html client/app/bem

```
1 <div class="page-header">
2     <h1>Listagem de Bens</h1>
3 </div>
4 <div class="row">
5     <!-- Barra Lateral -->
6     <div class="col-md-2">
7         Busca: <input ng-model="criterio">
8     </div>
9
10    <!-- Conteúdo -->
11    <div class="col-md-10">
12        <div ng-repeat="bem in vm.bens | filter:criterio" class="row">
13            <div class="col-md-3">
14                <a class="thumbnail">
15                    
16                    <div class="caption">
17                        <h3 ng-bind="bem.descricao"></h3>
18                    </div>
19                </a>
20            </div>
21        </div>
22    </div>
23 </div>
```

Listagem de Bens

Busca:



Palácio dos
Buritis, sede do
GDF




Prédio do Banco
Central do Brasil
- BACEN

Ativando o modo html5

```
... ...
1  (function (angular, undefined) {
2      'use strict';
3
4      angular.module('cadpat')
5          .config(config);
6
7      config.$inject = ['$routeProvider', '$locationProvider'];
8      function config($routeProvider, $locationProvider) {
9          $locationProvider.html5Mode(true);
10
11         $routeProvider
12             .when('/bens', {
13                 templateUrl: 'app/bem/bem-lista.html',
14                 controller: 'ListagemController',
15                 controllerAs: 'vm'
16             })
17             .otherwise({
18                 redirectTo: '/bens'
19             });
20     }
21 })(angular);
```



```
~  
4 <head>  
5     <meta charset="utf-8">  
6     <meta http-equiv="X-UA-Compatible" content="IE=edge">  
7     <meta name="viewport" content="width=device-width, initial-scale=1">  
8     <title>Cadastro de Patrimônio</title>  
9     <base href="/">
```

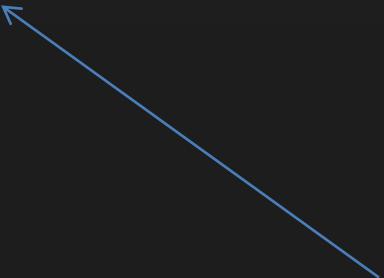



Listagem de Bens

Busca:



Palácio dos
Buritis, sede do
GDF



CRUD: Detalhar

```
app.module('cadpat')
```

```
1  (function (angular, undefined) {
2      'use strict';
3
4      angular.module('cadpat')
5          .config(config);
6
7      config.$inject = ['$routeProvider', '$locationProvider'];
8      function config($routeProvider, $locationProvider) {
9          $locationProvider.html5Mode(true);
10
11         $routeProvider
12             .when('/bens', {
13                 templateUrl: 'app/bem/bem-lista.html',
14                 controller: 'ListagemController',
15                 controllerAs: 'vm'
16             })
17             .when('/bens/:id', { -----
18                 templateUrl: 'app/bem/bem-detalhe.html',
19                 controller: 'DetalheController',
20                 controllerAs: 'vm'
21             })
22             .otherwise({
23                 redirectTo: '/bens'
24             });
25     }
26 })(angular);
```

```
1 (function (angular, undefined) {
2     'use strict';
3
4     angular
5         .module('bemControllers', [])
6         .controller('ListagemController', ListagemController)
7         .controller('DetalheController', DetalheController) ←
8
9     DetalheController.$inject = ['$http', '$routeParams', '$window'];
10    function DetalheController($http, $routeParams, $window) {
11        var vm = this;
12
13        activate();
14
15        ///////////////////
16
17        function activate() {
18            $http.get('/api/v1/bens/' + $routeParams.id)
19                .success(function (response) {
20                    vm.bem = response;
21                })
22                .error(function (message) {
23                    $window.alert(message);
24                });
25        }
26    }
}, {})
```

```
1  <div class="page-header">
2      <h1>Detalhamento de Bem: {{vm.bem._id}}</h1>
3  </div>
4  <div class="row">
5      <!-- Conteúdo -->
6      <div class="col-md-12">
7          <div class="row">
8              <div class="col-md-3">
9                  <div class="thumbnail">
10                     
11                     <div class="caption">
12                         <h3>{{vm.bem.descricao}}</h3>
13                     </div>
14                     <a href="/">Voltar</a>
15                 </div>
16             </div>
17         </div>
18     </div>
19 </div>
```

CRUD: Inclusão

```
1 <div class="page-header">
2     <h1>Listagem de Bens</h1>
3 </div>
4 <div class="row">
5     <!-- Barra Lateral -->
6     <div class="col-md-2">
7         Busca: <input ng-model="criterio">
8         <a href="/bens/incluir" class="btn btn-primary" role="button">Novo Bem</a>
9     </div>
10
11    <!-- Conteúdo -->
12    <div class="col-md-10">
13        <div ng-repeat="bem in vm.bens | filter:criterio" class="row">
14            <div class="col-md-3">
15                <a class="thumbnail" href="/bens/{{bem.id}}">
16                    
17                    <div class="caption">
18                        <h3>{{bem.descricao}}</h3>
19                    </div>
20                </a>
21            </div>
22        </div>
23    </div>
24 </div>
```

```
1 <form ng-submit="vm.salvar()">
2     <div class="form-group">
3         <label for="urlFoto">URL Foto</label>
4         <input type="text" ng-model="vm.bem.urlFoto"
5                 class="form-control" id="urlFoto" placeholder="URL Foto">
6     </div>
7     <div class="form-group">
8         <label for="descricao">Descrição</label>
9         <input type="text" ng-model="vm.bem.descricao"
10            class="form-control" id="descricao" placeholder="Descrição">
11     </div>
12     <button type="submit" class="btn btn-primary">Salvar</button>
13     <a href="/bens" class="btn btn-default">Cancelar</a>
14 </form>
```

```
4 angular
5     .module('bemControllers', [])
6     .controller('ListagemController', ListagemController)
7     .controller('DetalheController', DetalheController)
8     .controller('IncluirController', IncluirController);
9
10
11 IncluirController.$inject = ['$http', '$location', '$window'];
12 function IncluirController($http, $location, $window) {
13     var vm = this;
14     vm.bem = {};
15     vm.salvar = salvar;
16
17     ///////////////////
18
19     function salvar() {
20         $http.post('/api/v1/bens', vm.bem)
21             .success(function (response) {
22                 $window.alert('Bem incluído com sucesso');
23                 $location.path('/bens');
24             })
25             .error(function (message) {
26                 $window.alert(message);
27             });
28     }
29 }
```

```
1 (function (angular, undefined) {
2     'use strict';
3
4     angular.module('cadpat')
5         .config(config);
6
7     config.$inject = ['$routeProvider', '$locationProvider'];
8     function config($routeProvider, $locationProvider) {
9         $locationProvider.html5Mode(true);
10
11         $routeProvider
12             .when('/bens', {
13                 templateUrl: 'app/bem/bem-lista.html',
14                 controller: 'ListagemController',
15                 controllerAs: 'vm'
16             })
17             .when('/bens/incluir', { ←
18                 templateUrl: 'app/bem/bem-mantem.html',
19                 controller: 'IncluirController',
20                 controllerAs: 'vm'
21             })
22             .when('/bens/:id', {
23                 templateUrl: 'app/bem/bem-detalhe.html',
24                 controller: 'DetalheController',
25                 controllerAs: 'vm'
26             })
27             .otherwise({
28                 redirectTo: '/bens'
29             });
30     }
}
```

```
1 <form novalidate name="frmbem" ng-submit="vm.salvar()">
2     <div class="form-group">
3         <label for="urlFoto">URL Foto</label>
4         <input type="text" name="urlFoto" ng-model="vm.bem.urlFoto" required
5             class="form-control" id="urlFoto" placeholder="URL Foto">
6         <span ng-show="frmbem.urlFoto.$dirty && frmbem.urlFoto.$error.required"
7             class="form-control alert-danger">
8             URL da foto não informada
9         </span>
10    </div>
11    <div class="form-group">
12        <label for="descricao">Descrição</label>
13        <input type="text" name="descricao" ng-model="vm.bem.descricao" required minlength="10"
14            class="form-control" id="descricao" placeholder="Descrição">
15        <span ng-show="frmbem.descricao.$dirty && frmbem.descricao.$error.required"
16            class="form-control alert-danger">
17            descrição não informada
18        </span>
19        <span ng-show="frmbem.descricao.$dirty && frmbem.descricao.$error.minlength"
20            class="form-control alert-danger">
21            descrição deve ter no mínimo de 10 caracteres
22        </span>
23    </div>
24    <button type="submit" class="btn btn-primary" ng-disabled="frmbem.$invalid">Salvar</button>
25    <a href="/bens" class="btn btn-default">Cancelar</a>
26 </form>
```

DIA 6

Diretivas


Acessando o objeto do Fomulário pelo Controller

```
4 <form novalidate name="vm.frmbem" ng-submit="vm.salvar()>
5     <div class="form-group">
6         <label for="urlFoto">URL Foto</label>
7         <input type="text" name="urlFoto" ng-model="vm.bem.urlFoto" required
8             class="form-control" id="urlFoto" placeholder="URL Foto">
9         <span ng-show="vm.frmbem.urlFoto.$dirty && vm.frmbem.urlFoto.$error.required"
10            class="form-control alert-danger">
11                URL da foto não informada
12            </span>
13        </div>
14        <div class="form-group">
15            <label for="descricao">Descrição</label>
16            <input type="text" name="descricao" ng-model="vm.bem.descricao" required minlength="10"
17                class="form-control" id="descricao" placeholder="Descrição">
18            <span ng-show="vm.frmbem.descricao.$dirty && vm.frmbem.descricao.$error.required"
19                class="form-control alert-danger">
20                    Descrição não informada
21                </span>
22            <span ng-show="vm.frmbem.descricao.$dirty && vm.frmbem.descricao.$error.minlength"
23                class="form-control alert-danger">
24                    Descrição deve ter no mínimo de 10 caracteres
25                </span>
26        </div>
27        <button type="submit" class="btn btn-primary" ng-disabled="vm.frmbem.$invalid">Salvar</button>
28        <a href="/bens" class="btn btn-default">Cancelar</a>
29    </form>
```

```
48 //////////////////////////////////////////////////////////////////  
49  
50     function salvar() {  
51         if (vm.frmbem.$valid) {  
52             $http.post('/api/v1/bens', vm.bem)  
53                 .success(function (response) {  
54                     $window.alert('Bem incluído com sucesso');  
55                     $location.path('/bens');  
56                 })  
57                 .error(function (message) {  
58                     $window.alert(message);  
59                 });  
60     }  
61 }  
62 }
```

CRUD: Alteração

```
1 <div class="page-header">
2     <h1>Listagem de Bens</h1>
3 </div>
4 <div class="row">
5     <!-- Barra Lateral -->
6     <div class="col-md-2">
7         Busca: <input ng-model="criterio">
8         <a href="/bens/incluir" class="btn btn-primary" role="button">Novo Bem</a>
9     </div>
10
11     <!-- Conteúdo -->
12     <div class="col-md-10">
13         <div ng-repeat="bem in vm.bens | filter:criterio" class="row">
14             <div class="col-md-3">
15                 <div class="thumbnail">
16                     <a href="/bens/{{bem.id}}">
17                         
18                         <div class="caption">
19                             <h3>{{bem.descricao}}</h3>
20                         </div>
21                     </a>
22                     <a ng-href="{{'/bens/alterar/' + bem._id}}" 
23                         class="btn btn-primary" role="button">Alterar</a>
24                 </div>
25             </div>
26         </div>
27     </div>
28 </div>
```



```
1 <div ng-show="vm.bem._id" class="page-header">
2     <h1>Alterando o Bem: {{vm.bem._id}}</h1> ←
3 </div>
4 <form novalidate name="frmBem" ng-submit="vm.salvar()">
5     <div class="form-group">
6         <label for="urlFoto">URL Foto</label>
7         <input type="text" name="urlFoto" ng-model="vm.bem.urlFoto" required
8             class="form-control" id="urlFoto" placeholder="URL Foto">
9         <span ng-show="frmBem.urlFoto.$dirty && frmBem.urlFoto.$error.required"
10            class="form-control alert-danger">
11             URL da foto não informada
12         </span>
13     </div>
14     <div class="form-group">
15         <label for="descricao">Descrição</label>
16         <input type="text" name="descricao" ng-model="vm.bem.descricao" required minlength="10"
17             class="form-control" id="descricao" placeholder="Descrição">
18         <span ng-show="frmBem.descricao.$dirty && frmBem.descricao.$error.required"
19            class="form-control alert-danger">
20             descrição não informada
21         </span>
22         <span ng-show="frmBem.descricao.$dirty && frmBem.descricao.$error.minlength"
23            class="form-control alert-danger">
24             descrição deve ter no mínimo de 10 caracteres
25         </span>
26     </div>
27     <button type="submit" class="btn btn-primary" ng-disabled="frmBem.$invalid">Salvar</button>
28     <a href="/bens" class="btn btn-default">Cancelar</a>
29 </form>
```

```
7 config.$inject = ['$routeProvider', '$locationProvider'];
8 function config($routeProvider, $locationProvider) {
9     $locationProvider.html5Mode(true);
10
11     $routeProvider
12         .when('/bens', {
13             templateUrl: 'app/bem/bem-lista.html',
14             controller: 'ListagemController',
15             controllerAs: 'vm'
16         })
17         .when('/bens/incluir', {
18             templateUrl: 'app/bem/bem-mantem.html',
19             controller: 'IncluirController',
20             controllerAs: 'vm'
21         })
22         .when('/bens/alterar/:id', { ←
23             templateUrl: 'app/bem/bem-mantem.html',
24             controller: 'AlterarController',
25             controllerAs: 'vm'
26         })
27         .when('/bens/:id', {
28             templateUrl: 'app/bem/bem-detalhe.html',
29             controller: 'DetalheController',
30             controllerAs: 'vm'
31         })
32         .otherwise({
33             redirectTo: '/bens'
34         });
35 }
```

```
4 angular
5     .module('bemControllers', [])
6     .controller('ListagemController', ListagemController)
7     .controller('DetalheController', DetalheController)
8     .controller('IncluirController', IncluirController)
9     .controller('AlterarController', AlterarController);
10
11 AlterarController.$inject = ['$http', '$location', '$routeParams', '$window'];
12 function AlterarController($http, $location, $routeParams, $window) {
13     var vm = this;
14     vm.salvar = salvar;
15
16     activate();
17
18     ///////////////////
19
20     function activate() {
21         $http.get('/api/v1/bens/' + $routeParams.id)
22             .success(function (response) {
23                 vm.bem = response;
24             })
25             .error(function (message) {
26                 $window.alert(message);
27             });
28     }
29
30     function salvar() {
31         $http.put('/api/v1/bens/' + vm.bem._id, vm.bem)
32             .success(function (response) {
33                 $window.alert('Bem alterado com sucesso');
34                 $location.path('/bens');
35             })
36             .error(function (message) {
37                 $window.alert(message);
38             });
39     }
40 }
```

A última operação do CRUD: Remoção

```
~  
11     <!-- Conteúdo -->  
12     <div class="col-md-10">  
13         <div ng-repeat="bem in vm.bens | filter:criterio" class="row">  
14             <div class="col-md-3">  
15                 <div class="thumbnail">  
16                     <a href="/bens/{{bem.id}}>  
17                           
19                             <h3>{{bem.descricao}}</h3>  
20                         </div>  
21                     </a>  
22                     <a ng-href="{{'/bens/alterar/' + bem._id}}>  
23                         class="btn btn-primary" role="button">Alterar</a>  
24                     <button ng-click="vm.excluir(bem._id)">  
25                         class="btn btn-default" role="button">Excluir</a>  
26                 </div>  
27             </div>  
28         </div>  
29     </div>
```



```
81 ListagemController.$inject = ['$http', '$window'];
82 function ListagemController($http, $window) {
83     var vm = this;
84
85     vm.excluir = excluir;
86
87     activate();
88
89     ///////////////////
90
91     function activate() {
92         $http.get('/api/v1/bens')
93             .success(function (response) {
94                 vm.bens = response;
95             })
96             .error(function (message) {
97                 $window.alert(message);
98             });
99     }
100
101     function excluir(id) {
102         if(!$window.confirm('Confirma a exclusão do bem id: ' + id + '?')) {
103             return;
104         }
105         $http.delete('/api/v1/bens/' + id)
106             .success(function (response) {
107                 $window.alert('Bem excluído com sucesso!');
108                 activate();
109             })
110             .error(function (message) {
111                 $window.alert(message);
112             });
113     }
114 }
```

Criando um Serviço Customizado

```
1 (function(angular, undefined) {
2     'use strict';
3
4     angular
5         .module('cadpatServices', [])
6         .factory('bemService', bemService);
7
8     bemService.$inject = ['$resource'];
9
10    function bemService($resource) {
11        return $resource('/api/v1/bens/:id', null, {
12            update: {
13                method: 'PUT'
14            },
15        });
16    }
17 })(angular);
```

```
1 (function (angular, undefined) {  
2     'use strict';  
3     angular.module('cadpat', [  
4         'ngResource',  
5         'ngRoute',  
6         'cadpatFilters',  
7         'cadpatServices',  
8         'bemControllers'  
9     ]);  
10 })(angular);
```

```
26
27      <script src="app/app.module.js"></script>
28      <script src="app/app.config.js"></script>
29      <script src="app/app.filters.js"></script>
30 |      <script src="app/app.services.js"></script>
31      <script src="app/bem/bem.controllers.js"></script>
```

```
90 |     ListagemController.$inject = ['$window', 'bemService'];
91 |
92 |     function ListagemController($window, bemService) {
93 |         var vm = this;
94 |
95 |         vm.excluir = excluir;
96 |
97 |         activate();
98 |
99 |         ///////////////////
100 |
101 |         function activate() {
102 |             bemService.query(function(bens) {
103 |                 vm.bens = bens;
104 |             },
105 |             function(error) {
106 |                 $window.alert(error);
107 |             });
108 |         }
109 |     }
110 | }
```

```
110     function excluir(id) {
111         if (!$window.confirm('Confirma a exclusão do bem id: ' + id + '?')) {
112             return;
113         }
114
115         bemService.delete({
116             id: id,
117         }, function() {
118             $window.alert('Bem excluído com sucesso!');
119             activate();
120         }, function(erro) {
121             $window.alert(erro);
122         });
123     }
124 }
```

```
09
70 DetalheController.$inject = ['$routeParams', '$window', 'bemService'];
71
72 function DetalheController($routeParams, $window, bemService) {
73     var vm = this;
74
75     activate();
76
77     /////////////////////
78
79     function activate() {
80         bemService.get({
81             id: $routeParams.id,
82         }, function(bem) {
83             vm.bem = bem;
84         }, function(error) {
85             $window.alert(error);
86         });
87     }
88 }
```

```
48 |     function IncluirController($location, $window, bemService) {
49 |         var vm = this;
50 |         vm.bem = {};
51 |         vm.salvar = salvar;
52 |
53 |         ///////////////////
54 |
55 |         function salvar() {
56 |             if (vm.frmbem.$valid) {
57 |                 bemService.save(
58 |                     vm.bem,
59 |                     function() {
60 |                         $window.alert('Bem incluído com sucesso');
61 |                         $location.path('/bens');
62 |                     },
63 |                     function(erro) {
64 |                         $window.alert(erro);
65 |                     });
66 |             }
67 |         }
68 |     }
```

```
13 |     function AlterarController($location, $routeParams, $window, bemService) {
14 |         var vm = this;
15 |         vm.salvar = salvar;
16 |
17 |         activate();
18 |
19 |         ///////////////
20 |
21 |         function activate() {
22 |             bemService.get({
23 |                 id: $routeParams.id,
24 |             }, function(bem) {
25 |                 vm.bem = bem;
26 |             }, function(error) {
27 |                 $window.alert(error);
28 |             });
29 |         }
30 |
31 |         function salvar() {
32 |             bemService.update({
33 |                 id: $routeParams.id,
34 |             },
35 |             vm.bem,
36 |             function() {
37 |                 $window.alert('Bem alterado com sucesso');
38 |                 $location.path('/bens');
39 |             },
40 |             function(error) {
41 |                 $window.alert(error);
42 |             });
43 |         }
44 |     }
45 | }
```

Criando um Filtro Customizado

```
1  <div class="page-header">
2      <h1>Listagem de Bens</h1>
3  </div>
4  <div class="row">
5      <!-- Barra Lateral -->
6      <div class="col-md-2">
7          Busca: <input ng-model="criterio">
8          <a href="/bens/incluir" class="btn btn-primary" role="button">Novo Bem</a>
9      </div>
10
11     <!-- Conteúdo -->
12     <div class="col-md-10">
13         <div ng-repeat="bem in vm.bens | filter:criterio" class="row">
14             <div class="col-md-3">
15                 <div class="thumbnail">
16                     <a href="/bens/{{bem._id}}">
17                         
18                         <div class="caption">
19                             <h3>{{bem.descricao | maiusculo}}</h3>|-----^
20                         </div>
21                     </a>
22                     <a ng-href="{{'/bens/alterar/' + bem._id}}"
23                         class="btn btn-primary" role="button">Alterar</a>
24                     <button ng-click="vm.excluir(bem._id)"
25                         class="btn btn-default" role="button">Excluir</a>
26                 </div>
27             </div>
28         </div>
29     </div>
30 </div>
```

```
1  (function() {
2    'use strict';
3
4    angular
5      .module('cadpatFilters', [])
6      .filter('maiusculo', maiusculo);
7
8    maiusculo.$inject = [];
9
10   function maiusculo() {
11     return function(input) {
12       return input.toUpperCase();
13     };
14   }
15 })();
```

```
17    <!-- angular.js -->
18    <script src="bower_components/angular/angular.js"></script>
19    <script src="bower_components/angular-animate/angular-animate.js"></script>
20    <script src="bower_components/angular-route/angular-route.js"></script>
21
22    <!-- angular ui-bootstrap -->
23    <link href="bower_components/angular-bootstrap/ui-bootstrap-csp.css" rel="stylesheet">
24    <script src="bower_components/angular-bootstrap/ui-bootstrap-tpls.js"></script>
25
26    <script src="app/app.module.js"></script>
27    <script src="app/app.config.js"></script>
28    <script src="app/app.filters.js"></script> ←
29    <script src="app/bem/bem.controllers.js"></script>
```

```
1  (function (angular, undefined) {  
2      'use strict';  
3      angular.module('cadpat', [  
4          'ngRoute',  
5          'cadpatFilters', ←  
6          'bemControllers'  
7      ]);  
8  })(angular);
```

Parte IV

TypeScript

TypeScript



TypeScript

- types
- annotations

ES6

- classes
- modules

ES5

Experiências em TS

```
1 function saudar(pessoa) {  
2     return 'Olá, ' + pessoa;  
3 }  
4 var usuario = 'Mundo';  
5 console.log(saudar(usuario));
```

```
1 function saudar(pessoa: string) {  
2     return 'Olá, ' + pessoa;  
3 }  
4  
5 var usuario = 100;  
6  
7 console.log(saudar(usuario));
```

```
1 interface Pessoa {  
2     primeiroNome: string;  
3     ultimoNome: string;  
4 }  
5  
6 function saudar(pessoa: Pessoa) {  
7     return 'Olá, ' + pessoa.primeiroNome + ' ' + pessoa.ultimoNome;  
8 }  
9  
10 var usuario = { primeiroNome: 'José', ultimoNome: 'Silva' };  
11  
12 console.log(saudar(usuario));
```

```
1 class Estudante {  
2     nomeCompleto: string;  
3     constructor(public primeiroNome, public nomeMeio, public ultimoNome) {  
4         this.nomeCompleto = primeiroNome + ' ' + nomeMeio + ' ' + ultimoNome;  
5     }  
6 }  
7  
8 interface Pessoa {  
9     primeiroNome: string;  
10    ultimoNome: string;  
11 }  
12  
13 function saudar(pessoa: Pessoa) {  
14     return 'Olá, ' + pessoa.primeiroNome + ' ' + pessoa.ultimoNome;  
15 }  
16  
17 var usuario = new Estudante('Arthur', 'C.', 'Clark');  
18  
19 console.log(saudar(usuario));
```

```
1 class Pessoa {
2     constructor(public primeiroNome: string, public ultimoNome: string) {
3     }
4 }
5
6 class Estudante extends Pessoa {
7     nomeCompleto: string;
8     constructor(primeiroNome, public nomeMeio: string, ultimoNome) {
9         super(primeiroNome, ultimoNome);
10        this.nomeCompleto = this.primeiroNome + ' ' + nomeMeio +
11            ' ' + this.ultimoNome;
12    }
13 }
14
15 function saudar(pessoa: Pessoa): string {
16     return 'Olá, ' + pessoa.primeiroNome + ' ' + pessoa.ultimoNome;
17 }
18
19 var usuario = new Estudante('Arthur', 'C.', 'Clark');
20
21 console.log(saudar(usuario));
```

```
1 var __extends = (this && this.__extends) || function (d, b) {
2     for (var p in b) if (b.hasOwnProperty(p)) d[p] = b[p];
3     function __() { this.constructor = d; }
4     d.prototype = b === null ? Object.create(b) : (__.prototype = b.prototype, new __());
5 };
6 var Pessoa = (function () {
7     function Pessoa(primeiroNome, ultimoNome) {
8         this.primeiroNome = primeiroNome;
9         this.ultimoNome = ultimoNome;
10    }
11    return Pessoa;
12 })();
13 var Estudante = (function (_super) {
14     __extends(Estudante, _super);
15     function Estudante(primeiroNome, nomeMeio, ultimoNome) {
16         _super.call(this, primeiroNome, ultimoNome);
17         this.nomeMeio = nomeMeio;
18         this.nomeCompleto = this.primeiroNome + ' ' + nomeMeio +
19             ' ' + this.ultimoNome;
20    }
21    return Estudante;
22 })(Pessoa);
23 function saudar(pessoa) {
24     return 'Olá, ' + pessoa.primeiroNome + ' ' + pessoa.ultimoNome;
25 }
26 var usuario = new Estudante('Arthur', 'C.', 'Clark');
27 console.log(saudar(usuario));
```

WELL

THAT ESCALATED QUICKLY

Como o compilador irá reconhecer o
AngularJS 1 se ele não foi escrito em
Typescript?

```
1  {
2    "globalDependencies": {
3      "angular": "registry:dt/angular#1.5.0+20160619025852",
4      "angular-animate": "registry:dt/angular-animate#1.5.0+20160614091201",
5      "angular-mocks": "registry:dt/angular-mocks#1.5.0+20160608104721",
6      "angular-resource": "registry:dt/angular-resource#1.5.0+20160613142217",
7      "angular-route": "registry:dt/angular-route#1.3.0+20160317120654",
8      "bootstrap": "registry:dt/bootstrap#3.3.5+20160619023404",
9      "jquery": "registry:dt/jquery#1.10.0+20160417213236"
10    }
11 }
```

WORKING FILES

- index.html client_gabarito
- bem.controllers.js client_gabarito/a...
- express.js server/config
- index.js server/app/routes
- .bowerrc
- bem.controllers.ts client_gabarito/a...
- bem-manter.html client_gabarito/a...
- bem-lista.html client_gabarito/app/b...
- app.module.js client_gabarito/app

CADASTRO-PATRIMONIO-NG

- client_exercicios
- client_gabarito
- exercicios
- node_modules
- referencias
- server
- test
- typings
 - globals
 - angular
 - index.d.ts
 - typings.json
- angular-animate
 - index.d.ts
 - typings.json
- angular-mocks
 - index.d.ts
 - typings.json
- angular-resource
- angular-route
- bootstrap
- jquery

index.d.ts typings/globals/angular

```
20 declare namespace angular {
21
22     // not directly implemented, but ensures that constructed class implements $get
23     interface IServiceProviderClass {
24         new (...args: any[]): IServiceProvider;
25     }
26
27     interface IServiceProviderFactory {
28         (...args: any[]): IServiceProvider;
29     }
30
31     // All service providers extend this interface
32     interface IServiceProvider {
33         $get: any;
34     }
35
36     interface IAngularBootstrapConfig {
37         strictDi?: boolean;
38         debugInfoEnabled?: boolean;
39     }
40
41     /////////////////////////////////
42     // AngularStatic
43     // see http://docs.angularjs.org/api
44     /////////////////////////////////
45     interface IAngularStatic {
46         bind(context: any, fn: Function, ...args: any[]): Function;
```

Configurando o compilador TS

tsconfig.json

```
1  {
2      "compilerOptions": {
3          "target": "es5",
4          "watch": true
5      },
6      "exclude": [
7          "node_modules",
8          "client/bower_components"
9      ]
10 }
```

Migrando nossa aplicação para TS

app.module.ts

```
1  namespace cadpat {  
2      'use strict';  
3      angular.module('cadpat', [  
4          'ngRoute',  
5          'bemControllers'  
6      ]);  
7  }
```

app.config.ts

```
1  namespace cadpat {
2      'use strict';
3
4      angular.module('cadpat')
5          .config(config);
6
7      config.$inject = ['$routeProvider', '$locationProvider'];
8      function config($routeProvider: ng.route.IRouteProvider,
9                      $locationProvider: ng.ILocationProvider) {
10         $locationProvider.html5Mode(true);
11
12         $routeProvider
13             .when('/bens', {
14                 templateUrl: 'app_ts/bem/bem-lista.html',
15                 controller: 'ListagemController',
16                 controllerAs: 'vm'
17             })
18             .when('/bens/incluir', {
19                 templateUrl: 'app_ts/bem/bem-mantem.html',
20                 controller: 'IncluirController',
21                 controllerAs: 'vm'
22             })
23             .when('/bens/alterar/:id', {
24                 templateUrl: 'app_ts/bem/bem-mantem.html',
25                 controller: 'AlterarController',
26                 controllerAs: 'vm'
27             })
28             .when('/bens/:id', {
29                 templateUrl: 'app_ts/bem/bem-detalhe.html',
30                 controller: 'DetalheController',
31                 controllerAs: 'vm'
32             })
33             .otherwise({
34                 redirectTo: '/bens'
35             });
36     }
37 }
```

bem.controllers.js

```
1  namespace cadpat.bem {
2      'use strict';
3
4      interface IBem {
5          _id: string;
6          urlFoto: string;
7          descricao: string;
8      }
9
10     interface IRouteParamsServiceBem extends ng.route.IRouteParamsService {
11         id: string;
12     }
```

bem.controllers.js

```
88     class ListagemController {
89         static $inject = ['$http', '$window'];
90         bens: IBem[];
91
92         constructor(private $http: ng.IHttpService,
93                     private $window: ng.IWindowService) {
94             this.listar();
95         }
96
97         ///////////////
98
99         listar() {
100             this.$http.get('/api/v1/bens')
101                 .success((response: IBem[]) => {
102                     this.bens = response;
103                 })
104                 .error((message) => {
105                     this.$window.alert(message);
106                 });
107         }
108
109         excluir(id: string) {
110             if (!this.$window.confirm('Confirma a exclusão do bem id: ' + id + '?')) {
111                 return;
112             }
113             this.$http.delete('/api/v1/bens/' + id)
114                 .success((response) => {
115                     this.$window.alert('Bem excluído com sucesso!');
116                     this.listar();
117                 })
118                 .error((message) => {
119                     this.$window.alert(message);
120                 });
121     }
```

bem.controllers.js

```
57
58     class DetalheController {
59         static $inject = ['$http', '$routeParams', '$window'];
60         bem: IBem;
61
62         /////////////////
63
64         constructor($http: ng.IHttpService,
65             $routeParams: IRouteParamsServiceBem,
66             $window: ng.IWindowService) {
67
68             $http.get('/api/v1/bens/' + $routeParams.id)
69                 .success((response: IBem) => {
70                     this.bem = response;
71                 })
72                 .error((message) => {
73                     $window.alert(message);
74                 });
75         }
76     }
77
78 --
```

bem.controllers.js

```
45  class IncluirController {
46      static $inject = ['$http', '$location', '$window'];
47      bem: IBem;
48
49      constructor(private $http: ng.IHttpService,
50                  private $location: ng.ILocationService,
51                  private $window: ng.IWindowService) {
52  }
53
54  ///////////////
55
56  salvar() {
57      this.$http.post('/api/v1/bens', this.bem)
58          .success((response) => {
59              this.$window.alert('Bem incluído com sucesso');
60              this.$location.path('/bens');
61          })
62          .error((message) => {
63              this.$window.alert(message);
64          });
65    }
66}
```

bem.controllers.js

```
14     class AlterarController {
15         static $inject = ['$http', '$location', '$routeParams', '$window'];
16         bem: IBem;
17
18         constructor(private $http: ng.IHttpService,
19             private $location: ng.ILocationService,
20             private $routeParams: IRouteParamsServiceBem,
21             private $window: ng.IWindowService) {
22             $http.get('/api/v1/bens/' + $routeParams.id)
23                 .success((response: IBem) => {
24                     this.bem = response;
25                 })
26                 .error((message) => {
27                     this.$window.alert(message);
28                 });
29     }
30
31     ///////////////
32
33     salvar() {
34         this.$http.put('/api/v1/bens/' + this.bem._id, this.bem)
35             .success((response) => {
36                 this.$window.alert('Bem alterado com sucesso');
37                 this.$location.path('/bens');
38             })
39             .error((message) => {
40                 this.$window.alert(message);
41             });
42 }
```

bem.controllers.js

```
124     angular
125         .module('bemControllers', [])
126             .controller('ListagemController', ListagemController)
127             .controller('DetalheController', DetalheController)
128             .controller('IncluirController', IncluirController)
129             .controller('AlterarController', AlterarController);
130
131 }
```

DIA 7

Components

Parte V

Diretivas

AngularJS Directives

Application

- `ng-app`
- `ng-controller`

Forms

- `ng-pattern`
- `ng-minlength`
- `ng-maxlength`
- `ng-required`
- `ng-list`
- `ng-true-value`
- `ng-false-value`
- `ng-options`
- `ng-submit`

Template

- `ng-csp`
- `ng-disabled`
- `ng-hide | show`
- `ng-if`
- `ng-mouse`
- `ng-repeat`
- `ng-switch`
- `ng-transclude`
- `ng-view`
- `ng-include`

Operation

- `ng-change`
- `ng-checked`
- `ng-click`
- `ng-href`
- `ng-selected`

Binding

- `ng-bind`
- `ng-model`
- `ng-init`
- `ng-src`
- `ng-style`

```
<my-dir></my-dir>
<span my-dir="exp"></span>
<!-- directive: my-dir exp -->
<span class="my-dir: exp;"></span>
```

bem-lista.html client/app_ts/bem

```
1  <!--<div class="page-header">
2      <h1>Listagem de Bens</h1>
3  </div>-->
4 | <ac-cabecalho></ac-cabecalho>
5 | <div class="row">
6     <!-- Barra Lateral -->
7     <div class="col-md-2">
8         Busca: <input ng-model="criterio">
9         <a href="/bens/incluir" class="btn btn-primary" role="button">Novo Bem</a>
10    </div>
```

```
bem-detalhe.html client/app_ts/bem
```

```
1 | <!--<div class="page-header">
2 |     <h1>Detalhamento de Bem: {{vm.bem._id}}</h1>
3 | </div>-->
4 | <ac-cabecalho></ac-cabecalho>
5 | <div class="row">
6 |     <!-- Conteúdo -->
7 |     <div class="col-md-12">
8 |         <div class="row">
```

```
ac-cabecalho.directive.ts client/app_ts/directives
```


```
1  namespace cadpat {
2      'use strict';
3
4      angular.module('cadpat')
5          .directive('acCabecalho', accCabecalho);
6
7      accCabecalho.$inject = [];
8      function accCabecalho() {
9          let directive: ng.IDirective = {
10              template: `<div class="page-header">
11                  <h1>{{vm.textoCabecalho}}</h1>
12              </div>`
13          };
14
15          return directive;
16      }
17 }
```

```
68     class DetalheController {
69         static $inject = ['$http', '$routeParams', '$window'];
70         bem: IBem;
71         textoCabecalho: string; ←
72
73         ///////////////
74
75         constructor($http: ng.IHttpService,
76                     $routeParams: IRouteParamsServiceBem,
77                     $window: ng.IWindowService) {
78
79             $http.get('/api/v1/bens/' + $routeParams.id)
80                 .success((response: IBem) => {
81                     this.bem = response;
82                     this.textoCabecalho = `Detalhamento de Bem: ${this.bem._id}`; ←
83                 })
84                 .error((message) => {
85                     $window.alert(message);
86                 });
87         }
88     }
89
90     class ListagemController {
91         static $inject = ['$http', '$window'];
92         bens: IBem[];
93         textoCabecalho: string; ←
94
95         constructor(private $http: ng.IHttpService,
96                     private $window: ng.IWindowService) {
97             this.listar();
98             this.textoCabecalho = 'Listagem de Bens'; ←
99         }

```

ac-cabecalho.directive.ts client/app_ts/directives

```
1  namespace cadpat {
2      'use strict';
3
4      angular.module('cadpat')
5          .directive('acCabecalho', acCabecalho);
6
7      acCabecalho.$inject = [];
8      function acCabecalho() {
9          let directive: ng.IDirective = {
10              templateUrl: 'app_ts/directives/ac-cabecalho.directive.html'
11          };
12
13          return directive;
14      }
15  }
```

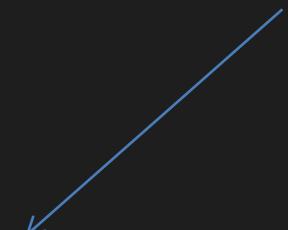

- ac-cabecalho.directive.html client/app_ts/directives

```
1  <div class="page-header">
2      <h1>{{vm.textoCabecalho}}</h1>
3  </div>
```

ac-cabecalho.directive.ts client/app_ts/directives

```
1  namespace cadpat {
2      'use strict';
3
4      angular.module('cadpat')
5          .directive('acCabecalho', acCabecalho);
6
7      acCabecalho.$inject = [];
8      function acCabecalho() {
9          let directive: ng.IDirective = {
10              templateUrl: 'app_ts/directives/ac-cabecalho.directive.html',
11              restrict: 'E' ←
12          };
13
14          return directive;
15      }
16 }
```

ac-cabecalho.directive.ts client/app_ts/directives

```
1  namespace cadpat {
2      'use strict';
3
4      angular.module('cadpat')
5          .directive('acCabecalho', accCabecalho);
6
7      accCabecalho.$inject = [];
8      function accCabecalho() {
9          let directive: ng.IDirective = {
10              templateUrl: 'app_ts/directives/ac-cabecalho.directive.html',
11              scope: {
12                  texto: '@' ←
13              },
14              restrict: 'E'
15          };
16
17          return directive;
18      }
19  }
```

```
ac-cabecalho.directive.html client/app_ts/directives
```

```
1 <div class="page-header">
2     <h1>{{texto}}</h1>
3 </div>
4 |
```

```
bem-lista.html client/app_ts/bem
```

```
1 <!--<div class="page-header">
2     <h1>Listagem de Bens</h1>
3 </div>-->
4 <ac-cabecalho texto="Listagem de Bens"></ac-cabecalho>
5 <div class="row">
6     <!-- Barra Lateral -->
7     <div class="col-md-2">
```

```
bem-detalhe.html client/app_ts/bem
```

```
1 <!--<div class="page-header">
2     <h1>Detalhamento de Bem: {{vm.bem._id}}</h1>
3 </div>-->
4 <ac-cabecalho texto="Detalhamento de Bem: {{vm.bem._id}}"></ac-cabecalho>
5 <div class="row">
6     <!-- Conteúdo -->
7     <div class="col-md-12">
8         <div class="row">
```

bem-lista.html client/app_ts/bem

```
1 <ac-cabecalho texto="Listagem de Bens">
2   <h3>Lista dos bens cadastrados de: {{vm.nomePessoa}}</h3>
3 </ac-cabecalho>
4 <div class="row">
5   <!-- Barra Lateral -->
6   <div class="col-md-2">
7     Busca: <input ng-model="criterio">
8     <a href="/bens/incluir" class="btn btn-primary" role="button">Novo Bem</a>
9   </div>
```

ac-cabecalho.directive.ts client/app_ts/directives

```
1  namespace cadpat {
2      'use strict';
3
4      angular.module('cadpat')
5          .directive('acCabecalho', acCabecalho);
6
7      acCabecalho.$inject = [];
8      function acCabecalho() {
9          let directive: ng.IDirective = {
10              templateUrl: 'app_ts/directives/ac-cabecalho.directive.html',
11              scope: {
12                  texto: '@'
13              },
14              transclude: true, ←
15              restrict: 'E'
16          };
17
18          return directive;
19      }
20  }
```

ac-cabecalho.directive.html client/app_ts/directives

```
1  <div class="page-header">
2      <h1>{{texto}}</h1>
3      <div ng-transclude></div>
4  </div>
```

```
angular.module('multiSlotTranscludeExample', [])
.directive('pane', function(){
  return {
    restrict: 'E',
    transclude: {
      'title': '?pane-title',
      'body': 'pane-body',
      'footer': '?pane-footer'
    },
    template: '<div style="border: 1px solid black;">' +
      '<div class="title" ng-transclude="title">Fallback Title</div>' +
      '<div ng-transclude="body"></div>' +
      '<div class="footer" ng-transclude="footer">Fallback Footer</div>' +
      '</div>'
  };
})
```

The diagram illustrates the mapping of transclude slots to template elements. Three blue arrows originate from the keys in the 'transclude' object of the directive definition and point to the corresponding 'ng-transclude' attributes in the template string:


- An arrow points from the key 'title' to the attribute 'ng-transclude="title"'.
- An arrow points from the key 'body' to the attribute 'ng-transclude="body"'.
- An arrow points from the key 'footer' to the attribute 'ng-transclude="footer"'.

```
bem-mantem.html client/app_ts/bem
```

```
1 <ac-cabecalho ng-show="vm.bem._id" texto="Alterando o Bem: {{vm.bem._id}}"></ac-cabecalho>
2 <ac-cabecalho ng-show="!vm.bem._id" texto="Cadastro de Novo Bem"></ac-cabecalho>
3
4 <form novalidate name="frmBem" ng-submit="vm.salvar()">
5     <div class="form-group">
6         <label for="urlFoto">URL Foto</label>
7         <input type="text" name="urlFoto" ng-model="vm.bem.urlFoto" required
8             class="form-control" id="urlFoto" placeholder="URL Foto">
9         <span ng-show="frmBem.urlFoto.$dirty && frmBem.urlFoto.$error.required"
10            class="form-control alert-danger">
11             URL da foto não informada
12         </span>
```

```
ac-bt-atencao.directive.ts client/app_ts/directives
```

```
1  namespace cadpat {
2      'use strict';
3
4      angular.module('cadpat')
5          .directive('acBtAtencao', acBtAtencao);
6
7      acBtAtencao.$inject = [];
8      function acBtAtencao() {
9          let directive: ng.IDirective = {
10              template: `<button ng-click="acao()"
11                  class="btn btn-danger" role="button">{{texto}}</button>`,
12              scope: {
13                  texto: '@',
14                  acao: '&'
15              },
16              restrict: 'E'
17          };
18
19          return directive;
20      }
21  }
```

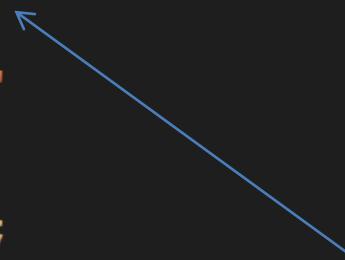

bem-lista.html

```
25
26      <ac-bt-atencao acao="vm.excluir(bem._id)" texto="Excluir">
27      </ac-bt-atencao>
28
29      <!--<button ng-click="vm.excluir(bem._id)"
30          class="btn btn-default" role="button">Excluir</button>-->
31      </div>
32  </div>
33  </div>
34  </div>
35 </div>
```

```
1  <ac-cabecalho texto="Listagem de Bens">
2      <h3>Lista dos bens cadastrados de: {{vm.nomePessoa}}</h3>
3  </ac-cabecalho>
4  <div class="row">
5      <!-- Barra Lateral -->
6      <div class="col-md-2">
7          Busca: <input ng-model="criterio">
8          <!--<a href="/bens/incluir" class="btn btn-primary" role="button">Novo Bem</a>-->
9          <ac-bt-navegar destino="/bens/incluir" texto="Novo Bem">
10         </ac-bt-navegar> ←
11     </div>
12
13     <!-- Conteúdo -->
14     <div class="col-md-10">
15         <div ng-repeat="bem in vm.bens | filter:criterio" class="row">
16             <div class="col-md-3">
17                 <div class="thumbnail">
18                     <a href="/bens/{{bem.id}}">
19                         
20                         <div class="caption">
21                             <h3>{{bem.descricao}}</h3>
22                         </div>
23                     </a>
24
25                     <!--<a ng-href="{{'/bens/alterar/' + bem._id}}" -->
26                         class="btn btn-primary" role="button">Alterar</a>-->
27
28                     <ac-bt-navegar destino="{{'/bens/alterar/' + bem._id}}" texto="Alterar">
29                     </ac-bt-navegar> →
30
31                     <ac-bt-atencao acao="vm.excluir(bem._id)" texto="Excluir">
32                     </ac-bt-atencao>
33
34     </div>
```

ac-bt-navegar.directive.ts client/app_ts/directives

```
1  namespace cadpat {
2      'use strict';
3
4      angular.module('cadpat')
5          .directive('acBtNavegar', acBtNavegar);
6
7      acBtNavegar.$inject = [];
8      function acBtNavegar() {
9          let directive: ng.IDirective = {
10              template: `<a ng-href="{{destino}}"
11                                class="btn btn-primary" role="button">{{texto}}</a>`,
12              scope: {
13                  texto: '@',
14                  destino: '@'
15              },
16              restrict: 'E'
17          };
18
19          return directive;
20      }
21  }
```

DIA 8

Angular-UI

```
1  <ac-cabecalho texto="Listagem de Bens">
2      <h3>Lista dos bens cadastrados de: {{vm.nomePessoa}}</h3>
3  </ac-cabecalho>
4  <div class="row">
5      <!-- Barra Lateral -->
6      <barra-lateral></barra-lateral> ←
7      <!--<div class="col-md-2">
8          Busca: <input ng-model="criterio">
9          <ac-bt-navegar destino="/bens/incluir" texto="Novo Bem">
10         </ac-bt-navegar>
11     </div>-->
12
13     <!-- Conteúdo -->
14     <div class="col-md-10">
15         <div ng-repeat="bem in vm.bens | filter:criterio" class="row">
16             <div class="col-md-3">
17                 <div class="thumbnail">
18                     <a href="/bens/{{bem._id}}">
19                         
20                         <div class="caption">
21                             <h3>{{bem.descricao}}</h3>
22                         </div>
23                     </a>
24
25                     <ac-bt-navegar destino="{{'/bens/alterar/' + bem._id}}" texto="Alterar">
26                     </ac-bt-navegar>
27
28                     <ac-bt-atencao acao="vm.excluir(bem._id)" texto="Excluir">
29                     </ac-bt-atencao>
30                 </div>
31             </div>
32         </div>
33     </div>
```

```
barra-lateral.component.ts client/app_ts/components
```

```
1  namespace cadpat {
2      'use strict';
3
4      angular.module('cadpat')
5          .component('barraLateral', {
6              templateUrl: 'app_ts/components/barra-lateral.component.html'
7          });
8  }
9
```


```
barra-lateral.component.html client/app_ts/components
```

```
1  <div class="col-md-2">
2      Busca: <input ng-model="criterio">
3      <ac-bt-navegar destino="/bens/incluir" texto="Novo Bem">
4      </ac-bt-navegar>
5  </div>
```

```
1  <ac-cabecalho texto="Listagem de Bens">
2      <h3>Lista dos bens cadastrados de: {{vm.nomePessoa}}</h3>
3  </ac-cabecalho>
4  <div class="row">
5      <!-- Barra Lateral -->
6      <barra-lateral criterio="vm.criterio"></barra-lateral>
7      <!--<div class="col-md-2">
8          Busca: <input ng-model="criterio">
9          <ac-bt-navegar destino="/bens/incluir" texto="Novo Bem">
10         </ac-bt-navegar>
11     </div>-->
12
13      <!-- Conteúdo -->
14      <div class="col-md-10">
15          <div ng-repeat="bem in vm.bens | filter:vm.criterio" class="row">
16              <div class="col-md-3">
17                  <div class="thumbnail">
18                      <a href="/bens/{{bem.id}}">
19                          
20                          <div class="caption">
21                              <h3>{{bem.descricao}}</h3>
22                          </div>
23                      </a>
24
25                      <ac-bt-navegar destino="{{'/bens/alterar/' + bem._id}}" texto="Alterar">
26                      </ac-bt-navegar>
27
28                      <ac-bt-atencao acao="vm.excluir(bem._id)" texto="Excluir">
29                      </ac-bt-atencao>
30                  </div>
31              </div>
32          </div>
33      </div>
```


barra-lateral.component.ts client/app_ts/components

```
1  namespace cadpat {
2      'use strict';
3
4      angular.module('cadpat')
5          .component('barraLateral', {
6              templateUrl: 'app_ts/components/barra-lateral.component.html',
7              controllerAs: 'vm',
8              bindings: {
9                  criterio: '='
10             }
11         });
12     }
```

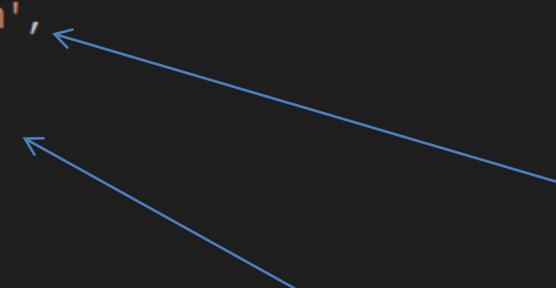

barra-lateral.component.html client/app_ts/components

```
1  <div class="col-md-2">
2      Busca: <input ng-model="vm.criterio">
3      <ac-bt-navegar destino="/bens/incluir" texto="Novo Bem">
4      </ac-bt-navegar>
5  </div>
```

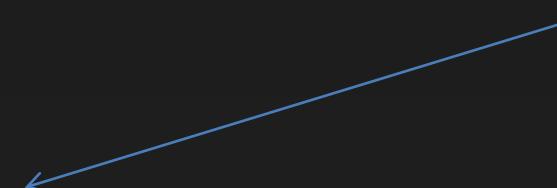

```
<ac-cabecalho texto="Listagem de Bens">
    <h3>Lista dos bens cadastrados de: {{vm.nomePessoa}}</h3>
</ac-cabecalho>
<div class="row">
    <!-- Barra Lateral -->
    <barra-lateral criterio="vm.criterio"></barra-lateral>

    <!-- Conteúdo -->
    <lista-bens bens="vm.bens" criterio="vm.criterio" on-excluir="vm.excluir(bemId)">
    </lista-bens>
    <!--<div class="col-md-10">
        <div ng-repeat="bem in vm.bens | filter:vm.criterio" class="row">
            <div class="col-md-3">
                <div class="thumbnail">
                    <a href="/bens/{{bem._id}}">
                        
                        <div class="caption">
                            <h3>{{bem.descricao}}</h3>
                        </div>
                    </a>

                    <ac-bt-navegar destino="{{'/bens/alterar/' + bem._id}}" texto="Alterar">
                    </ac-bt-navegar>

                    <ac-bt-atencao acao="vm.excluir(bem._id)" texto="Excluir">
                    </ac-bt-atencao>
                </div>
            </div>
        </div>
    </div>
</div>
```

lista-bens.component.ts client/app_ts/components

```
1  namespace cadpat {
2      'use strict';
3
4      angular.module('cadpat')
5          .component('listaBens', {
6              templateUrl: 'app_ts/components/lista-bens.component.html',
7              controllerAs: 'vm',
8              bindings: {
9                  bens: '=',
10                 criterio: '=',
11                 onExcluir: '&'
12             }
13         });
14 }
```

lista-bens.component.html client/app_ts/components

```
1  <div class="col-md-10">
2      <div ng-repeat="bem in vm.bens | filter:vm.criterio" class="row">
3          <div class="col-md-3">
4              <div class="thumbnail">
5                  <a href="/bens/{{bem.id}}">
6                      
7                      <div class="caption">
8                          <h3>{{bem.descricao}}</h3>
9                      </div>
10                 </a>
11
12                 <ac-bt-navegar
13                     destino="{{'/bens/alterar/' + bem._id}}"
14                     texto="Alterar">
15                 </ac-bt-navegar>
16
17                 <ac-bt-atencao
18                     acao="vm.onExcluir({ bemId: bem._id })"
19                     texto="Excluir">
20                     </ac-bt-atencao>
21                 </div>
22             </div>
23         </div>
24     </div>
```

```
bem-lista.html client/app_ts/bem
```

```
1 | <home-bens></home-bens>
2 | <!--<ac-cabecalho texto="Listagem de Bens">
3 |     <h3>Lista dos bens cadastrados de: {{vm.nomePessoa}}</h3>
4 | </ac-cabecalho>
5 | <div class="row">-->
6 |     <!-- Barra Lateral -->
7 |     <!--<barra-lateral criterio="vm.criterio"></barra-lateral>-->
8 |
9 |     <!-- Conteúdo -->
10 |    <!--<lista-bens bens="vm.bens" criterio="vm.criterio" on-excluir="vm.excluir(ben)">
11 |        </lista-bens>
12 |    </div>-->
13 |
```

```
1  namespace cadpat {
2      'use strict';
3
4      angular.module('cadpat')
5          .config(config);
6
7      config.$inject = ['$routeProvider', '$locationProvider'];
8      function config($routeProvider: ng.route.IRouteProvider,
9                      $locationProvider: ng.ILocationProvider) {
10         $locationProvider.html5Mode(true);
11
12         $routeProvider
13             .when('/bens', {
14                 templateUrl: 'app_ts/bem/bem-lista.html' ←
15                 // controller: 'ListagemController',
16                 // controllerAs: 'vm'
17             })
18             .when('/bens/incluir', {
19                 templateUrl: 'app_ts/bem/bem-mantem.html',
20                 controller: 'IncluirController',
21                 controllerAs: 'vm'
22             })
23             .when('/bens/alterar/:id', {
24                 templateUrl: 'app_ts/bem/bem-mantem.html',
25                 controller: 'AlterarController',
26                 controllerAs: 'vm'
27             })
28             .when('/bens/:id', {
29                 templateUrl: 'app_ts/bem/bem-detalhe.html',
```

```
home-bens.component.html client/app_ts/components
```

```
1  <ac-cabecalho texto="Listagem de Bens">
2      <h3>Lista dos bens cadastrados de: {{vm.nomePessoa}}</h3>
3  </ac-cabecalho>
4  <div class="row">
5      <!-- Barra Lateral -->
6      <barra-lateral criterio="vm.criterio"></barra-lateral>
7
8      <!-- Conteúdo -->
9      <lista-bens bens="vm.bens"
10         criterio="vm.criterio"
11         on-excluir="vm.excluir(bemId)">
12     </lista-bens>
13 </div>
```

home-bens.component.ts client/app_ts/components

```
1  namespace cadpat {
2      'use strict';
3
4      class HomeBensController {
5          static $inject = ['$http', '$window'];
6          bens: cadpat.bem.IBem[];
7          nomePessoa: string;
8
9          constructor(private $http: ng.IHttpService,
10             private $window: ng.IWindowService) {
11                 this.nomePessoa = 'Chico Buarque';
12                 this.listar();
13             }
14
15             ///////////////
16
17             listar() {
18                 this.$http.get('/api/v1/bens')
19                     .success((response: cadpat.bem.IBem[]) => {
20                         this.bens = response;
21                     })
22                     .error((message) => {
23                         this.$window.alert(message);
24                     });
25             }
}
```

```
26
27     excluir(id: string) {
28         if (!this.$window.confirm('Confirma a exclusão do bem id: ' + id + '?')) {
29             return;
30         }
31         this.$http.delete('/api/v1/bens/' + id)
32             .success((response) => {
33                 this.$window.alert('Bem excluído com sucesso!');
34                 this.listar();
35             })
36             .error((message) => {
37                 this.$window.alert(message);
38             });
39     }
40 }
41
42 angular.module('cadpat')
43     .component('homeBens', {
44         templateUrl: 'app_ts/components/home-bens.component.html',
45         controller: HomeBensController,
46         controllerAs: 'vm',
47     });
48 }
```

app.config.ts client/app_ts

```
1  namespace cadpat {
2      'use strict';
3
4      angular.module('cadpat')
5          .config(config);
6
7      config.$inject = ['$routeProvider', '$locationProvider'];
8      function config($routeProvider: ng.route.IRouteProvider,
9                      $locationProvider: ng.ILocationProvider) {
10         $locationProvider.html5Mode(true);
11
12         $routeProvider
13             .when('/bens', {
14                 template: '<home-bens></home-bens>' ←
15             })
16             .when('/bens/incluir', {
17                 templateUrl: 'app_ts/bem/bem-mantem.html',
18                 controller: 'IncluirController',
19                 controllerAs: 'vm'
20             })
21             .when('/bens/alterar/:id', {
22                 templateUrl: 'app_ts/bem/bem-mantem.html',
23                 controller: 'AlterarController',
24                 controllerAs: 'vm'
25             })
26     }
27 }
```

DIA 9

Integração

Parte VI

UI Bootstrap – AngularUI



AngularUI

The companion suite(s) to the [AngularJS](#) framework.

UI Bootstrap

Bootstrap components written in pure AngularJS by the
AngularUI Team

index.html client

```
1  <!DOCTYPE html>
2  <html lang="pt-br" ng-app="cadpat">
3
4  <head>
5      <meta charset="utf-8">
6      <meta http-equiv="X-UA-Compatible" content="IE=edge">
7      <meta name="viewport" content="width=device-width, initial-scale=1">
8      <title>Cadastro de Patrimônio</title>
9      <base href="/">
10
11     <!-- jQuery (necessary for Bootstrap's JavaScript plugins) -->
12     <script src="bower_components/jquery/dist/jquery.min.js"></script>
13
14     <!-- Bootstrap -->
15     <link href="bower_components/bootstrap/dist/css/bootstrap.min.css" rel="stylesheet">
16     <script src="bower_components/bootstrap/dist/js/bootstrap.min.js"></script>
17
18     <!-- angular.js -->
19     <script src="bower_components/angular/angular.js"></script>
20     <script src="bower_components/angular-route/angular-route.js"></script>
21
22     <!-- angular ui-bootstrap -->
23     <link href="bower_components/angular-bootstrap/ui-bootstrap-csp.css" rel="stylesheet">
24     <script src="bower_components/angular-bootstrap/ui-bootstrap.js"></script>
25     <script src="bower_components/angular-bootstrap/ui-bootstrap-tpls.js"></script>
```

```
app.module.ts client/app_ts
```

```
1  namespace cadpat {  
2      'use strict';  
3      angular.module('cadpat', [  
4          'ngRoute',  
5          'ui.bootstrap', ←  
6          'bemControllers'  
7      ]);  
8  }  
9
```

Accordion (ui.bootstrap.accordion)

[Toggle last panel](#)

[Enable / Disable first panel](#)

Open only one at a time

Static Header, initially expanded

This content is straight in the template.

Dynamic Group Header - 1

Dynamic Group Header - 2

Dynamic Group Body - 2

Dynamic Body Content

Custom template

Custom template with custom header template



Delete account

Log In / Logout / Log Out



lista-bens.component.html client/app_ts/components

```
1  <div class="col-md-10">
2    <uib-accordion>
3      <uib-accordion-group heading="Bem ID: {{bem._id}}"
4        ng-repeat="bem in vm.bens | filter:vm.criterio">
5        <div class="col-md-12">
6          <a href="/bens/{{bem.id}}">
7            
8            <div class="caption">
9              <h3>{{bem.descricao}}</h3>
10             </div>
11           </a>
12
13           <ac-bt-navegar destino="{{'/bens/alterar/' + bem._id}}"
14             texto="Alterar">
15           </ac-bt-navegar>
16
17           <ac-bt-atencao acao="vm.onExcluir({ bemId: bem._id })">
18             | texto="Excluir">
19             </ac-bt-atencao>
20           </div>
21         </uib-accordion-group>
22       </uib-accordion>
23     </div>
```

Alert (ui.bootstrap.alert)

Oh snap! Change a few things up and try submitting again.



Well done! You successfully read this important alert message.



A happy alert!

Add Alert

```
index.html client
41  </head>
42
43  <body>
44      <div class="container">
45          <div ng-controller="AlertaController as vm">
46              <uib-alert ng-repeat="alerta in vm.alertas"
47                  type="{{alerta.tipo}}"
48                  close="vm.fecharAlerta($index)">
49                  {{alerta.msg}}
50              </uib-alert>
51          </div>
52          <div ng-view></div>
53      </div>
54  </body>
55
56  </html>
```

- alerta.controllers.ts client/app_ts/alerta

```
1  namespace cadpat.alerta {
2      'use strict';
3
4      class AlertaController {
5          static $inject = ['alertaService'];
6          alertas: cadpat.alerta.IAlerta[];
7
8          constructor(private alertaService: cadpat.alerta.AlertService) {
9              this.alertas = alertaService.alertas;
10         }
11
12         ///////////////
13
14         fecharAlerta(index) {
15             this.alertas.splice(index, 1);
16         }
17     }
18
19     angular
20         .module('alertaControllers', [])
21         .controller('AlertaController', AlertaController);
22 }
```

```
► alerta.services.ts client/app_ts/alerta

1  namespace cadpat.alerta {
2      'use strict';
3
4      export type TipoAlerta = 'danger' | 'success';
5
6      export interface IAlerta {
7          tipo: TipoAlerta;
8          msg: string;
9      }
10
11     export class AlertaService {
12         alertas: IAlerta[] = [];
13     }
14
15     angular
16         .module('alertaServices', [])
17         .service('alertaService', AlertaService);
18
19 }
```

```
14 class AlterarController {
15     static $inject = ['$http', '$location', '$routeParams', 'alertaService'];
16     bem: IBem;
17
18     constructor(private $http: ng.IHttpService,
19                 private $location: ng.ILocationService,
20                 private $routeParams: IRouteParamsServiceBem, ↓
21                 private alertaService: cadpat.alerta.AlertService) {
22         $http.get('/api/v1/bens/' + $routeParams.id)
23             .success((response: IBem) => {
24                 this.bem = response;
25             })
26             .error((message) => {
27                 this.alertaService.alertas.push({tipo: 'danger', msg: message });
28             });
29     }
30
31     ///////////////
32
33     salvar() {
34         this.$http.put('/api/v1/bens/' + this.bem._id, this.bem)
35             .success((response) => {
36                 →this.alertaService.alertas.push({tipo: 'success', msg: 'Bem alterado com sucesso' });
37                 this.$location.path('/bens');
38             })
39             .error((message) => {
40                 →this.alertaService.alertas.push({tipo: 'danger', msg: message });
41             });
42     }
43 }
```

Buttons (ui.bootstrap.buttons)

Single toggle

```
0
```

Single Toggle

Checkbox

```
Model: {"left":false,"middle":false,"right":false}
```

```
Results: []
```

Left Middle Right

Radio & Uncheckable Radio

```
Right
```

Left Middle Right

Left Middle Right

Toggle uncheckable

```
bem-mantem.html client/app_ts/bem
16      
18      <span ng-show="frmbem.descricao.$dirty && frmbem.descricao.$error.required">
19          class="form-control alert-danger">
20              Descrição não informada
21      </span>
22      <span ng-show="frmbem.descricao.$dirty && frmbem.descricao.$error.minlength">
23          class="form-control alert-danger">
24              Descrição deve ter no mínimo de 10 caracteres
25      </span>
26      <div class="btn-group">
27          <label class="btn btn-primary" ng-model="vm.bem.tipo" uib-btn-radio="...
28              'movel'">Móvel</label>
29          <label class="btn btn-primary" ng-model="vm.bem.tipo" uib-btn-radio="...
30              'imovel'">Imóvel</label>
31      </div>
32  </div>
33  <button type="submit" class="btn btn-primary" ng-disabled="frmbem.$invalid">Sal...
34  <a href="/bens" class="btn btn-default">Cancelar</a>
35 </form>
```

lista-bens.component.html client/app_ts/components

```
1  <div class="col-md-10">
2    <uib-accordion>
3      <uib-accordion-group heading="Bem ID: {{bem._id}}"
4        ng-repeat="bem in vm.bens | filter:vm.criterio">
5        <div class="col-md-12">
6          <a href="/bens/{{bem.id}}">
7            
8            <div class="caption">
9              <h3>{{bem.descricao}}</h3>
10             <h4>Tipo: {{bem.tipo}}</h4> ←
11           </div>
12         </a>
13
14         <ac-bt-navegar destino="{{'/bens/alterar/' + bem._id}}"
15           texto="Alterar">
16         </ac-bt-navegar>
17
18         <ac-bt-atencao acao="vm.onExcluir({ bemId: bem._id })">
19           texto="Excluir">
20         </ac-bt-atencao>
21       </div>
22     </uib-accordion-group>
23   </uib-accordion>
24 </div>
```

Carousel (ui.bootstrap.carousel)



Add Slide

Randomize slides

Disable Slide Looping

Interval, in milliseconds:

5000

Enter a negative number or 0 to stop the interval.

lista-bens.component.html client/app_ts/components

```
1  <div class="col-md-10">
2    <div class="row">
3      <div class="col-md-6">
4        <uib-carousel active="0">
5          <uib-slide ng-repeat="bem in vm.bens" index="$index">
6            
8            <div class="carousel-caption">
9              <p>{{bem.descricao}}</p>
10         </div>
11       </uib-slide>
12     </uib-carousel>
13   </div>
14 </div>
```

Collapse (ui.bootstrap.collapse)

`Toggle collapse`

Some content

```
15  <div class="row">
16    <uib-accordion>
17      <uib-accordion-group heading="Bem ID: {{bem._id}}"
18        ng-repeat="bem in vm.bens | filter:vm.criterio">
19        <div class="col-md-12">
20          <a href="/bens/{{bem._id}}">
21            
22            <div class="caption">
23              <h3>{{bem.descricao}}</h3>
24              <h4>Tipo: {{bem.tipo}}</h4>
25            </div>
26          </a>
27
28          <button type="button" class="btn btn-default"           ↴
29            ng-click="exibirDetalhes = !exibirDetalhes">
30              {{exibirDetalhes? 'Menos' : 'Mais'}} Detalhes
31            </button>
32            <hr>
33            <div uib-collapse="!exibirDetalhes">
34              <div class="well well-lg">Lorem ipsum dolor sit amet, consectetur adipiscing elit.
35                Donec auctor sed metus in dignissim. In hac habitasse platea dictumst. Etiam
36                commodo lacus ligula, ut posuere mauris egestas non. Donec elementum tristique
37                lacinia. Ut semper, tortor et tristique vulputate, elit enim tristique velit,
38                quis dapibus augue odio ut elit. Vivamus semper sed tortor tempor viverra.
39                Maecenas tempor congue lectus pharetra convallis. Nullam vitae dictum justo,
40                eget accumsan erat. Praesent lacinia at elit quis hendrerit. In eu viverra sapien.</div>
41            </div>
42
43            <ac-bt-navegar destino="{{'/bens/alterar/' + bem._id}}"
44              texto="Alterar">
45            </ac-bt-navegar>
```

DIA 10

RESTful API

GET PUT POST DELETE

http://

Verbo HTTP

Seguro

Idempotente

GET



POST



PUT



DELETE



GET**PUT****POST****DELETE**

http://acme.com.br/api/v1/clientes

Lista os clientes	Substitui toda a lista de clientes por outra lista de clientes	Cria um novo cliente, geralmente a URI do cliente criado retorna como resposta	Apaga toda a lista de clientes
--------------------------	---	---	---------------------------------------

http://acme.com.br/api/v1/clientes/42876234

Retorna o cliente identificado pelo código 42876234	Substitui o cliente 42876234 com os dados enviados no request	Geralmente não utilizado	Apaga o cliente 42876234
--	--	--------------------------	---------------------------------

Correto:

/ufs

/clientes

/propostas

Errado:

/produto

/cadastrarCliente

/propostas/excluir



{JSON}

```
{ "users": [
    {
        "firstName": "Ray",
        "lastName": "Villalobos",
        "joined": {
            "month": "January",
            "day": 12,
            "year": 2012
        }
    },
    {
        "firstName": "John",
        "lastName": "Jones",
        "joined": {
            "month": "April",
            "day": 28,
            "year": 2010
        }
    }
]} 
```

Parte VII

Projeto Prático

Referências

JavaScript

https://developer.mozilla.org/en-US/docs/Web/JavaScript/A_re-introduction_to_JavaScript
http://eloquentjavascript.net/Eloquent_JavaScript.pdf

TypeScript

<https://www.typescriptlang.org/>
<https://www.gitbook.com/download/pdf/book/basarat/typescript>

AngularJS

<https://angularjs.org/>
<http://www.angularjsbook.com/angular-basics/chapters/introduction/>
<https://github.com/johnpapa/angular-styleguide>

Bootstrap

<http://getbootstrap.com/>
<https://angular-ui.github.io/bootstrap/>

NodeJS

<https://nodejs.org/en/>

Visual Studio Code

<https://code.visualstudio.com/>

Visual Studio Code

CTRL + P

```
> ext install html-snippets  
> ext install jshint  
> ext install jscs  
> ext install tslint  
> ext install Angular1
```