


Query Prior (arch.md §5) – 2 cascade levels, model input/output flow

Level 1 – coarse ($r_1 = 6\text{mm}$)

Level 2 – fine ($r_2 = 3\text{mm}$)

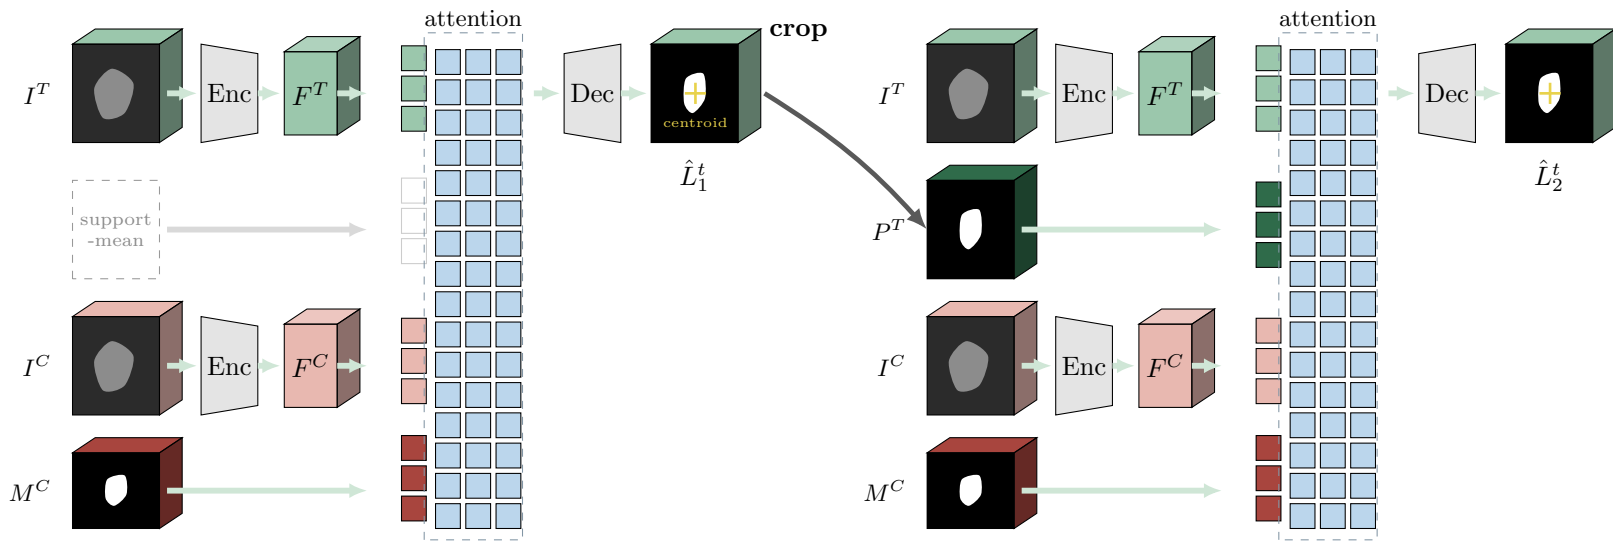

level 1: target's 2nd lane = *support-mean* (no real input) $\rightarrow$ level 2: target's 2nd lane = P^T , a REAL cube (crop of $\hat{L}_1^t$) – same lane the context mask always occupied