


James Tietz  
Lab 9

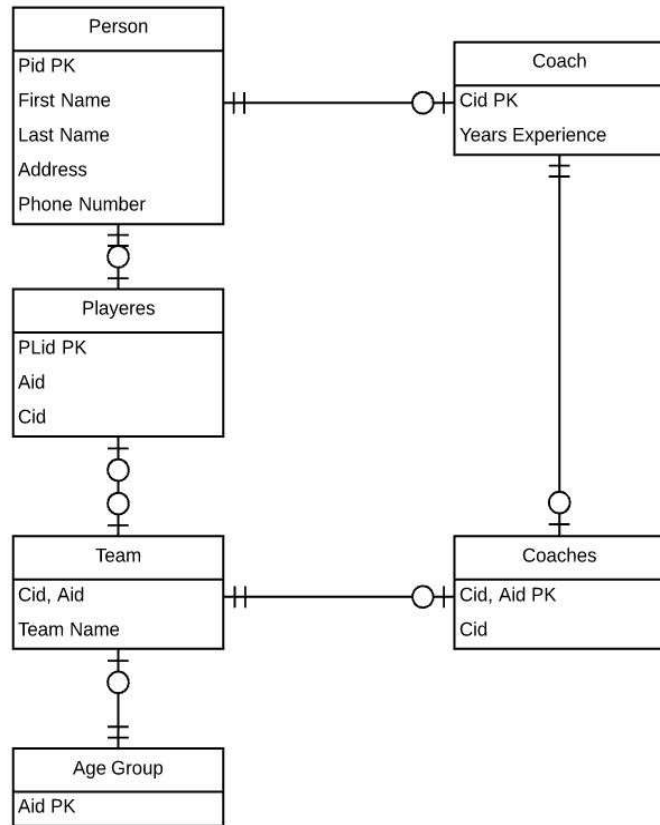

#### Functional Dependencies

Person: Pid --> First Name, Last Name, Address, Phone Number  
Player: PLid --> Aid, Cid  
Team: Aid, Cid --> Team Name  
Age Group: Aid -->  
Coach: Cid --> Years Experience  
Coaches: Aid, Cid --> Cid

Each table has a single candidate key, which makes 3NF possible. There are no partial key dependencies, which makes 2NF possible and they are atomic, which is the requirement for 1NF