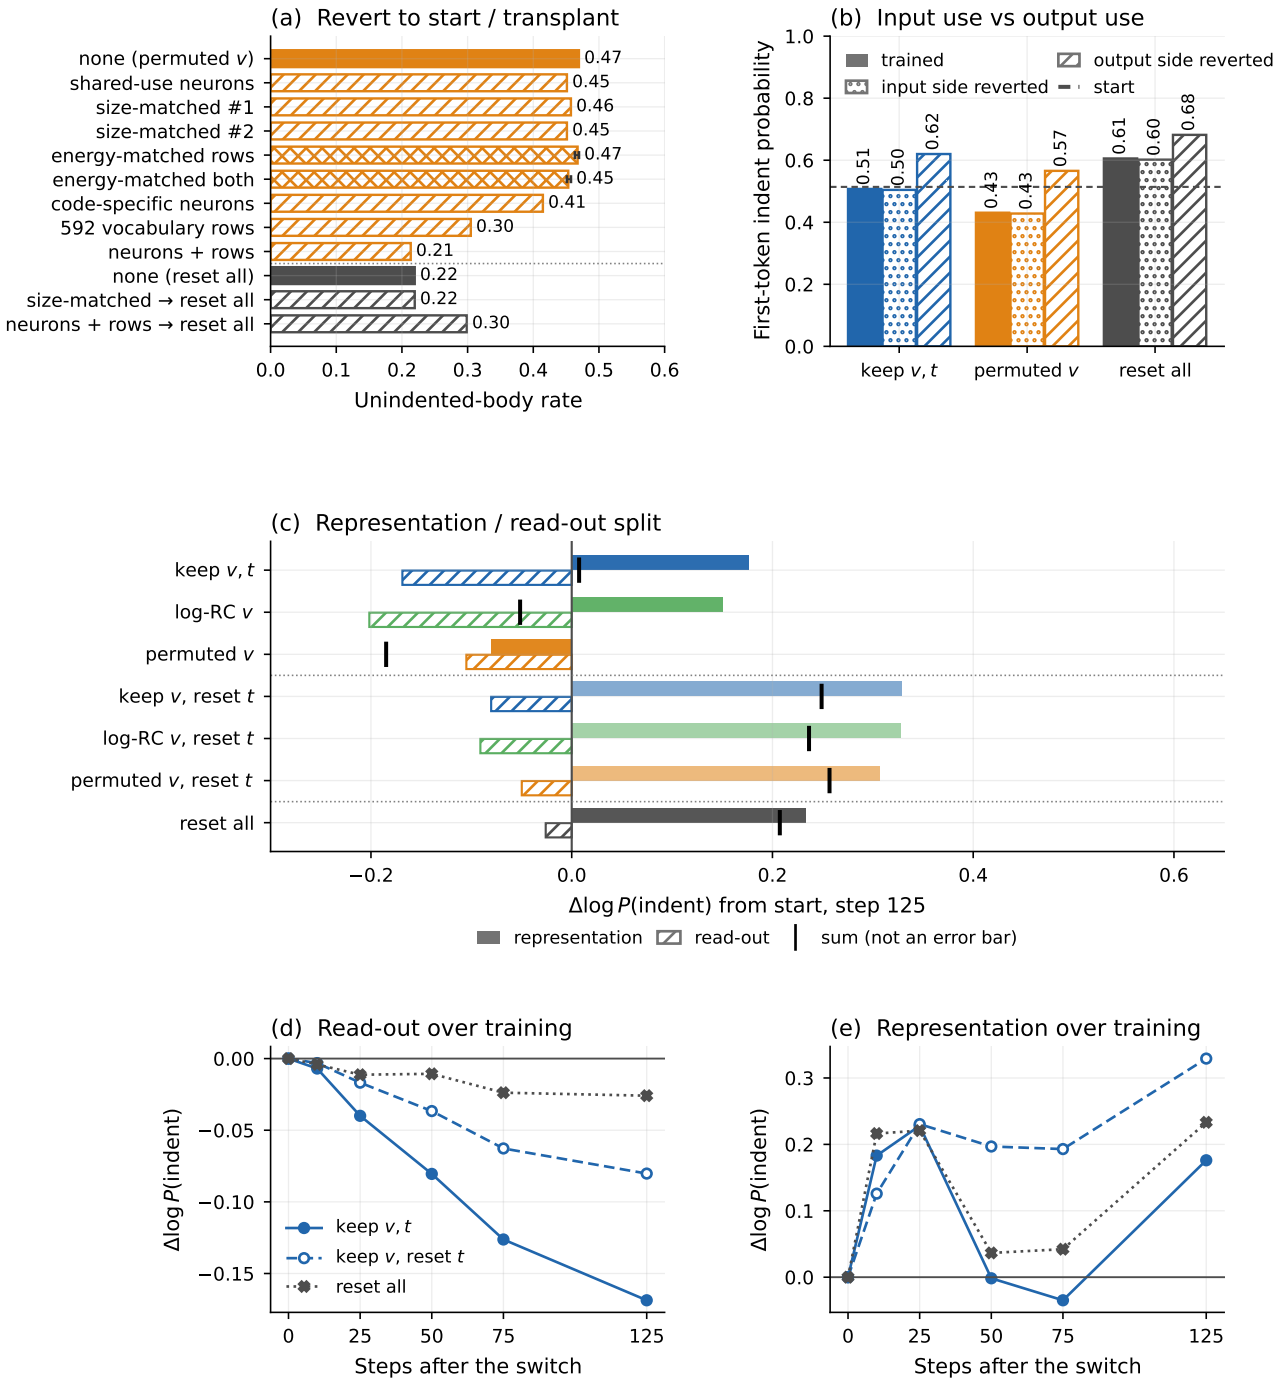

(a) Revert to start / transplant
none (permuted v)
shared-use neurons
size-matched #1
size-matched #2
energy-matched rows
energy-matched both
code-specific neurons
592 vocabulary rows
neurons + rows
none (reset all)
size-matched → reset all
neurons + rows → reset all
0.47
0.45
0.46
0.45
0.47
0.45
0.41
0.30
0.21
0.22
0.22
0.30
0.0 0.1 0.2 0.3 0.4 0.5 0.6
Unindented-body rate
(b) Input use vs output use
First-token indent probability
trained
input side reverted
output side reverted
start
0.51 0.50 0.62
0.43 0.43 0.57
0.61 0.60 0.68
keep v, t
permuted v
reset all
(c) Representation / read-out split
keep v, t
log-RC v
permuted v
keep v, reset t
log-RC v, reset t
permuted v, reset t
reset all
−0.2 0.0 0.2 0.4 0.6
Δlog P(indent) from start, step 125
representation
read-out
sum (not an error bar)
(d) Read-out over training
Δlog P(indent)
keep v, t
keep v, reset t
reset all
0 25 50 75 125
Steps after the switch
(e) Representation over training
Δlog P(indent)
0 25 50 75 125
Steps after the switch