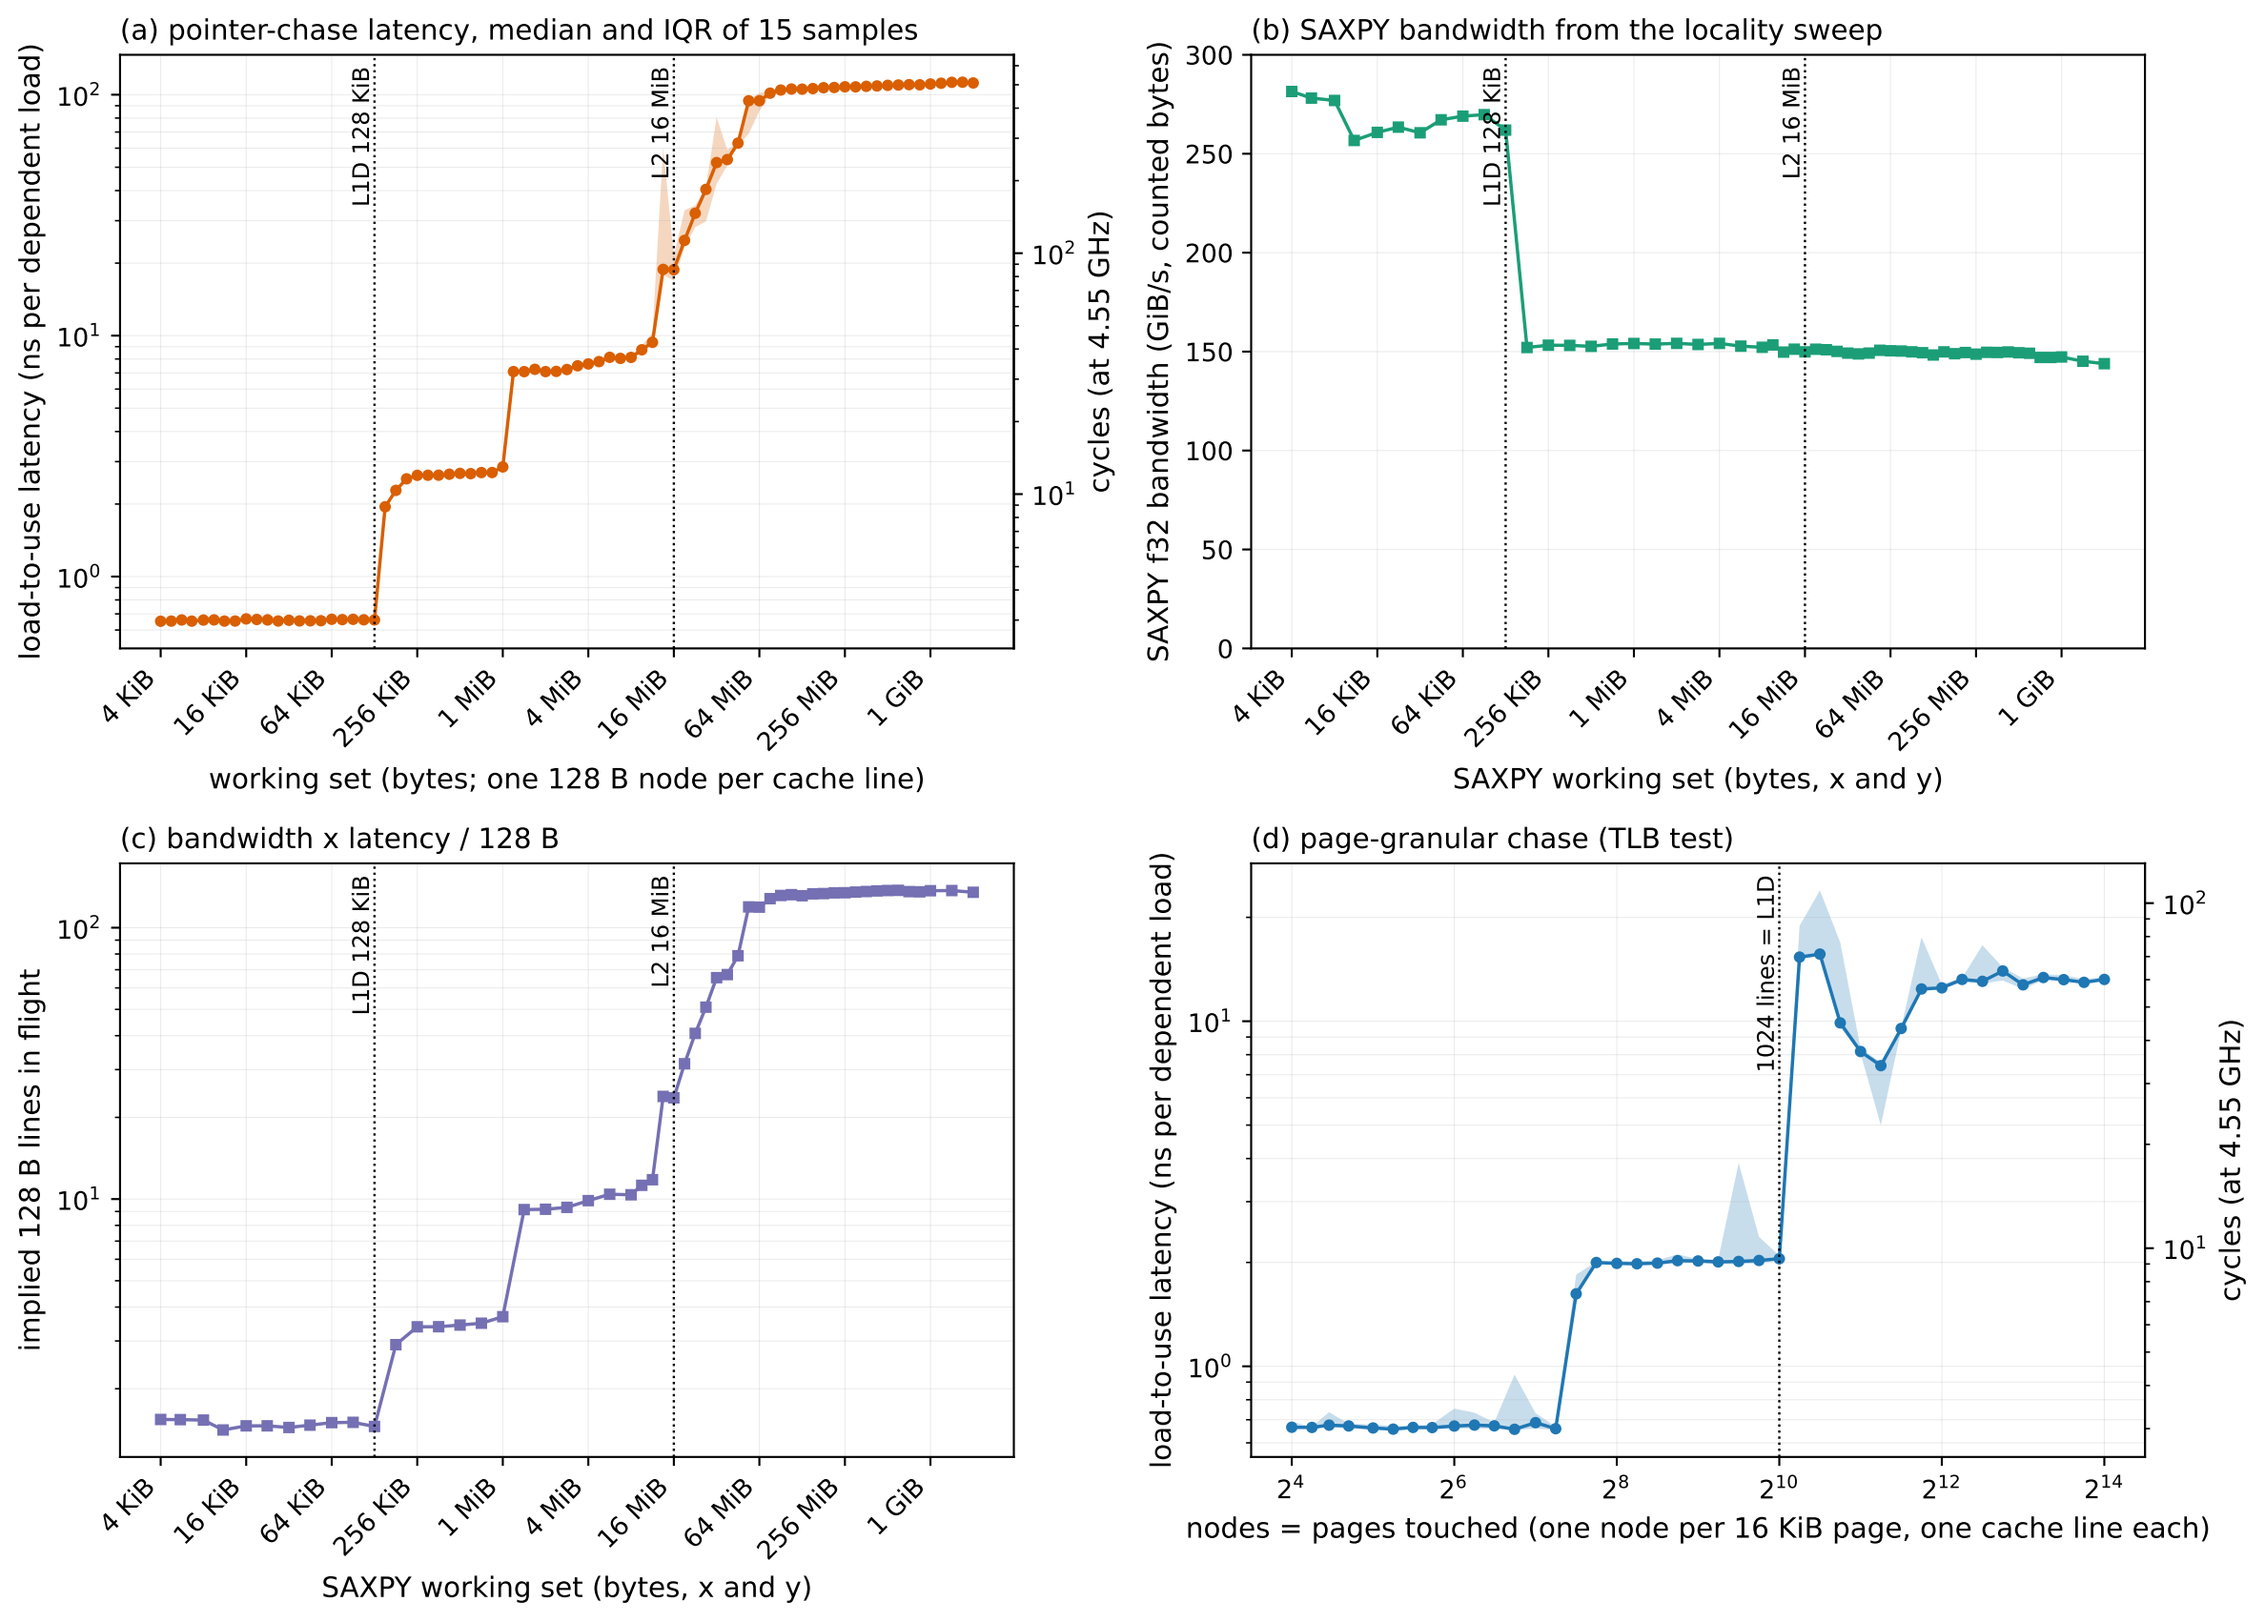
(a) pointer-chase latency, median and IQR of 15 samples
load-to-use latency (ns per dependent load)
cycles (at 4.55 GHz)
L1D 128 KiB
L2 16 MiB
working set (bytes; one 128 B node per cache line)
(b) SAXPY bandwidth from the locality sweep
SAXPY f32 bandwidth (GiB/s, counted bytes)
SAXPY working set (bytes, x and y)
(c) bandwidth x latency / 128 B
implied 128 B lines in flight
(d) page-granular chase (TLB test)
1024 lines = L1D
nodes = pages touched (one node per 16 KiB page, one cache line each)
4 KiB
16 KiB
64 KiB
256 KiB
1 MiB
4 MiB
16 MiB
64 MiB
256 MiB
1 GiB