


Long-term memory — two separate banks, one SqliteStore, split by namespace

No node is added for memory: recall/remember hook into nodes that already exist

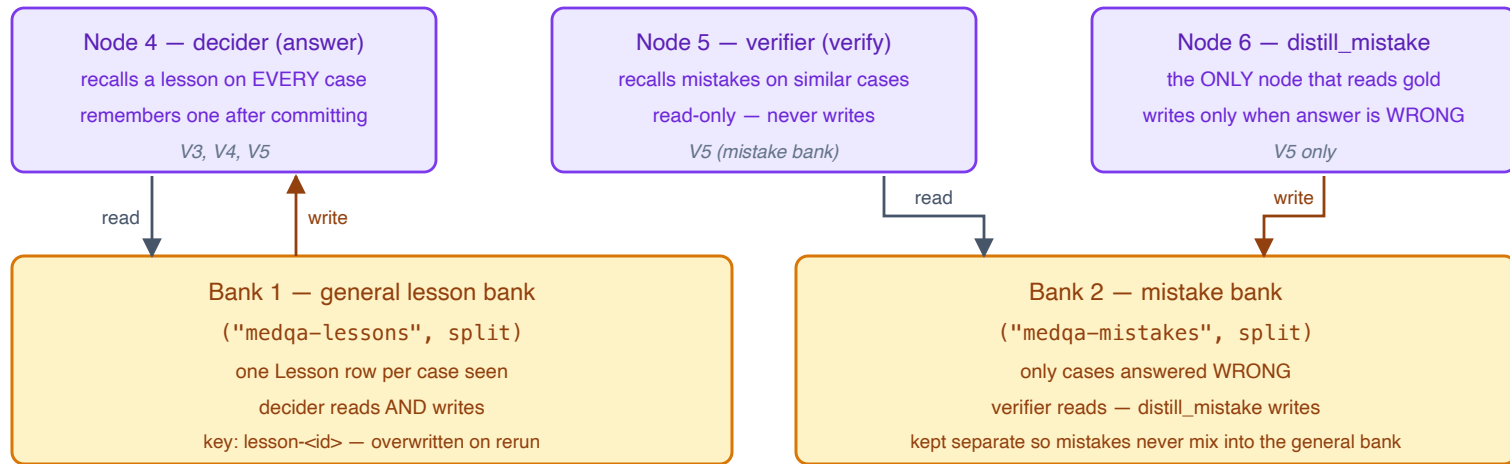

One file, `data/longterm/lessons.sqlite` — persists across questions AND runs (QASState dies after each question)

Why a Store instead of a checkpointer

- Checkpointer is keyed by `thread_id` (= `item.id`) — replays only ONE question. Store has its own namespace — crosses episode boundaries.
- namespace includes the split name — a lesson learned on train is invisible when querying the test namespace.