


The ablation ladder — one config, one graph per variant

every variant is a preset RunConfig compiled by `build_graph(cfg)`; all use the MedMCQA corpus

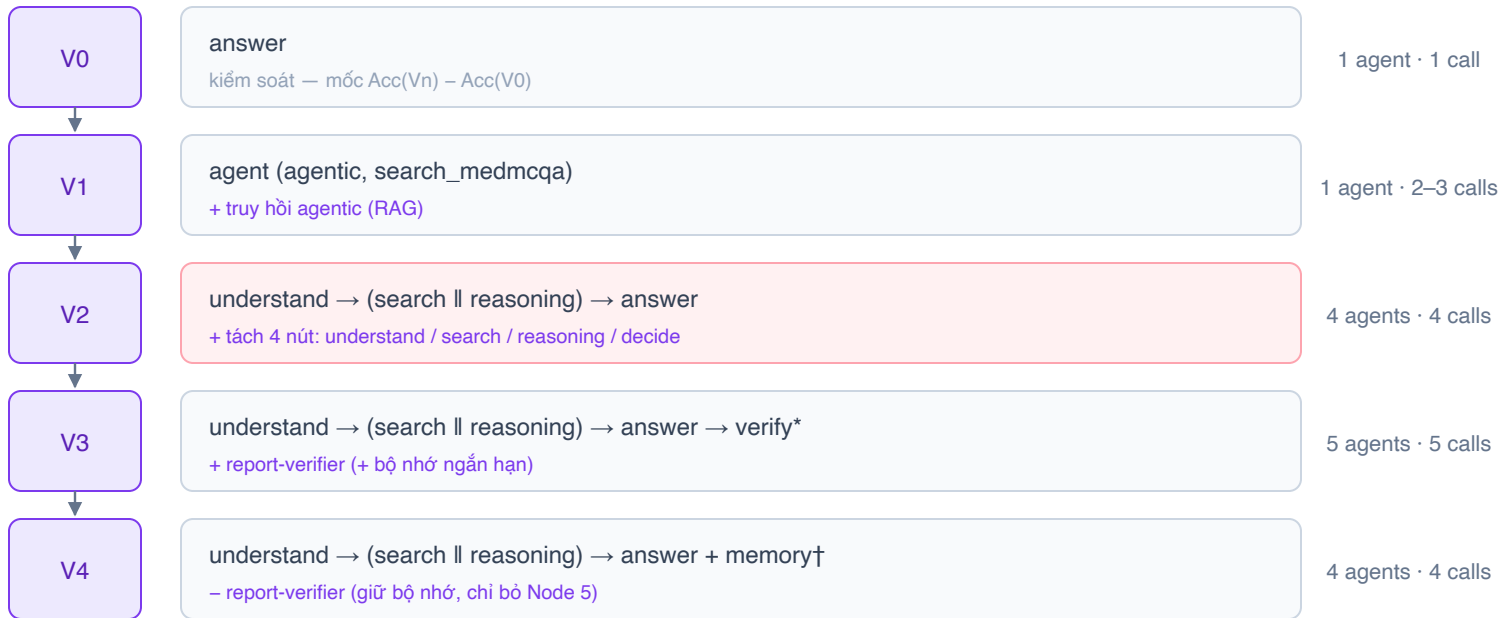

Each rung adds exactly one component, so accuracy deltas are attributable.

V1–V4 now share one corpus (MedMCQA); V3 and V4 differ by exactly the verifier, so V3 – V4 isolates it.

* verify reads the case summary from shared state when `memory=True` — no extra agent or LLM call.

† planned: `qa/variants.py` does not set `memory=True` on V4 yet — V4 is still byte-identical to V2 in the current code.