

*Machine learning 2*  
Exercise sheet 10

FLEISCHMANN Kay, Matrnr: 352247  
ROHRMANN Till, Matrnr: 343756

June 22, 2013

# Hidden Markov Model

Let  $A_{i,j}$  the transition matrix between hidden states  $x_i$  and  $x_j$ .  $B_{i,j}$  is the probability, being in state  $x_i$  to observe  $y_j$ . The following matrices  $A$  and  $B$  describe two hidden states and two possible observations.

$$A = \begin{pmatrix} 0.1 & 0.9 \\ 0.5 & 0.5 \end{pmatrix}$$

$$B = \begin{pmatrix} 0.2 & 0.8 \\ 0.4 & 0.6 \end{pmatrix}$$

## 19.a Implementation of Viterbi algorithm

## 19.b Experiment results

Perform the following experiment: for the Hidden Markov Model of sheet 9, that is, generate sequences of length  $l = 5, 10$  and  $20$ ; for each length generate a number of  $N = 1000$  pairs of output sequences and hidden state sequences. On these sequences, for each length, compare (i) the Viterbi algorithm and (ii) the algorithm which randomly uniformly estimates a state sequence by (i) plotting for each length, and all integers  $1 \leq k \leq l$ , the relative frequency of the algorithm correctly estimating the hidden state at position  $k$  (this is three plots, one for each, and in each plot two curves), and (ii) for each length, computing the relative frequency of both algorithms succeeding in completely identifying the state sequence correctly (this is two numbers for each of the three).

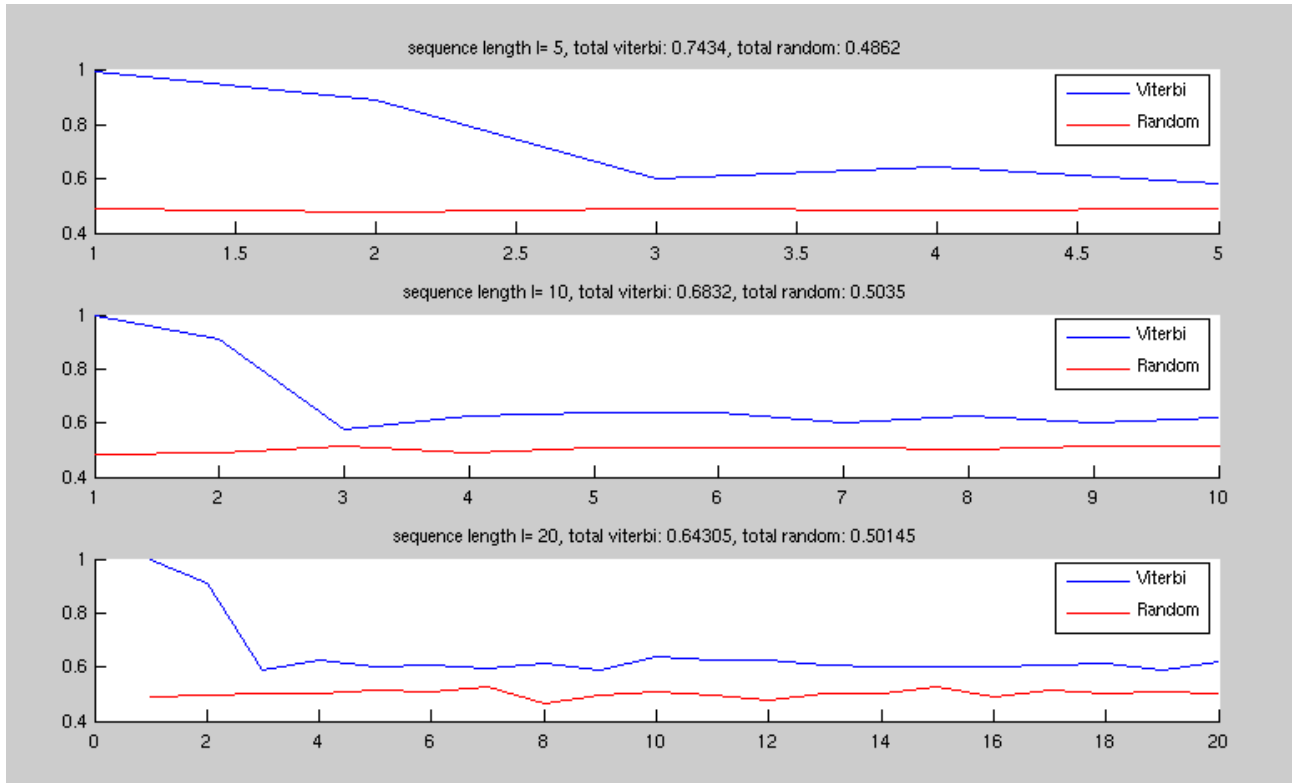


Figure 1: This plot compare the viterbi results with the funktion which randomly generate the hidden states. The plot shows the relative correct detected hidden states with diffrent settings in the experiment.