


# A Kernel Crossing Illustrated

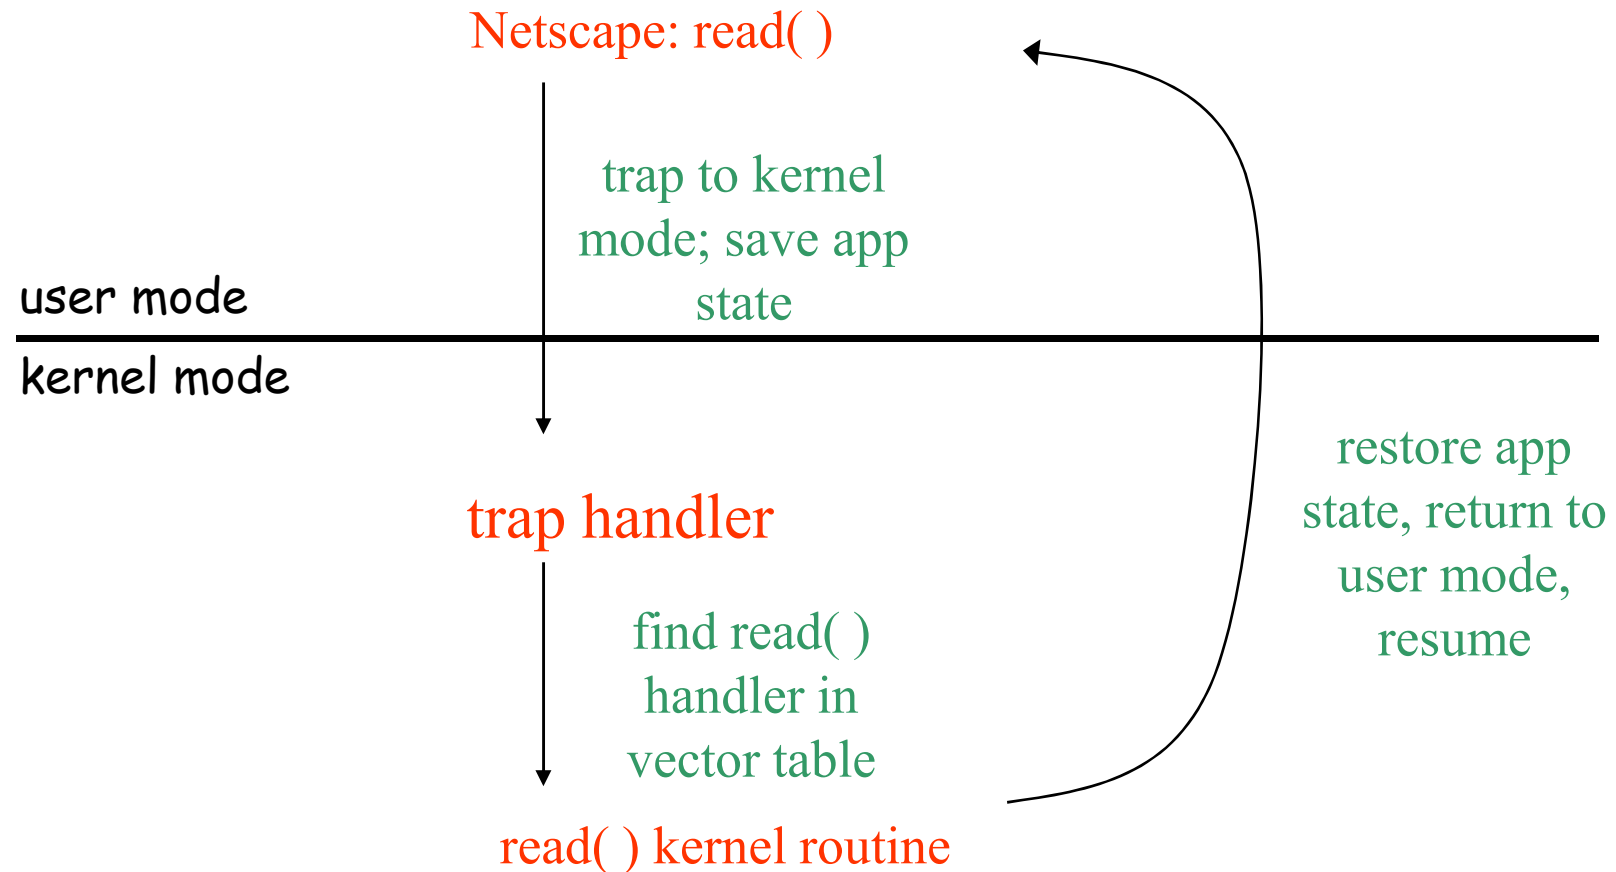

# Library Stubs for System Calls

◆ Example:

```
int read( int fd, char * buf, int size)
{
    move fd, buf, size to R1, R2,
    R3
    move READ to R0
    int $0x80
    move result to Rresult
}
```

Linux: 80  
NT: 2E

