Patrik Components

Scriptless HTML chart & range-bar components — one shared rendering script.

patrik-components.js

Every page contains **only markup and `data-*` configuration**. All rendering logic and styling live in a single external file. To use the components on any page, drop in the relevant HTML block and load the script once:

```
<!-- once per page, near the end of <body> -->
<script src="patrik-components.js"></script>
```


> The script auto-renders on page load. It finds every `.patrik-radar-chart` and `.patrik-range-bar` element and builds them from their attributes. No inline JavaScript needed.

1 Radar chart (performance octagon)

Single dataset

```
<div class="patrik-radar-chart"
     data-axes="LIGHTWIND,FREERIDE,FOIL,FREEFLY,WAVE,SURF,RACING,FREESTYLE"
     data-values="100,90,70,85,95,60,80,75"></div>
```

`data-values` map to `data-axes` **by position**. Values are 0–100. Add or remove axes freely — the octagon adapts to any number of axes.

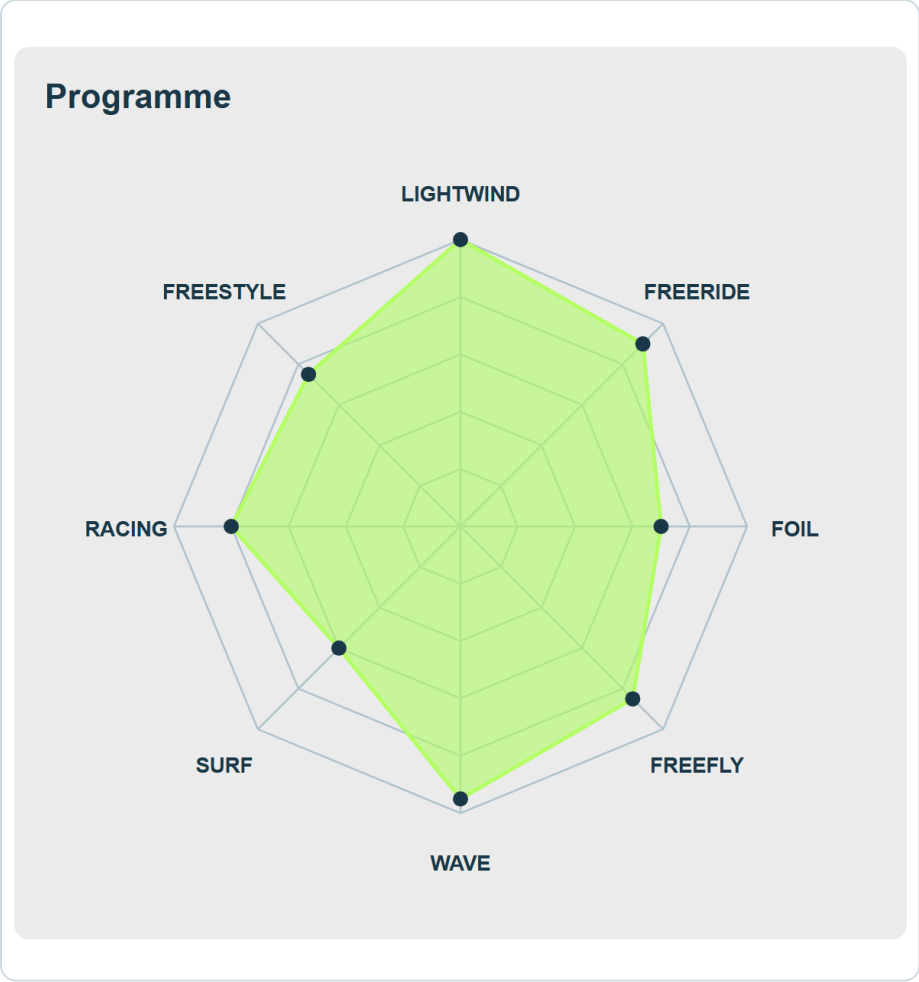


Result of `chart.html` — the single-dataset example above.

Switchable datasets (dropdown)

Put a `<select class="patrik-radar-select">` inside the chart. Each option's `value` is the comma list of values (same order as `data-axes`). The script wires up switching automatically.

```
<div class="patrik-radar-chart" data-axes="Lowend,Directness,Riding,Jumping">
  <select class="patrik-radar-select">
    <option value="100,70,100,90">4Wave FLOW HD</option>
    <option value="90,95,90,100">4Wave FLASH HD</option>
  </select>
</div>
```

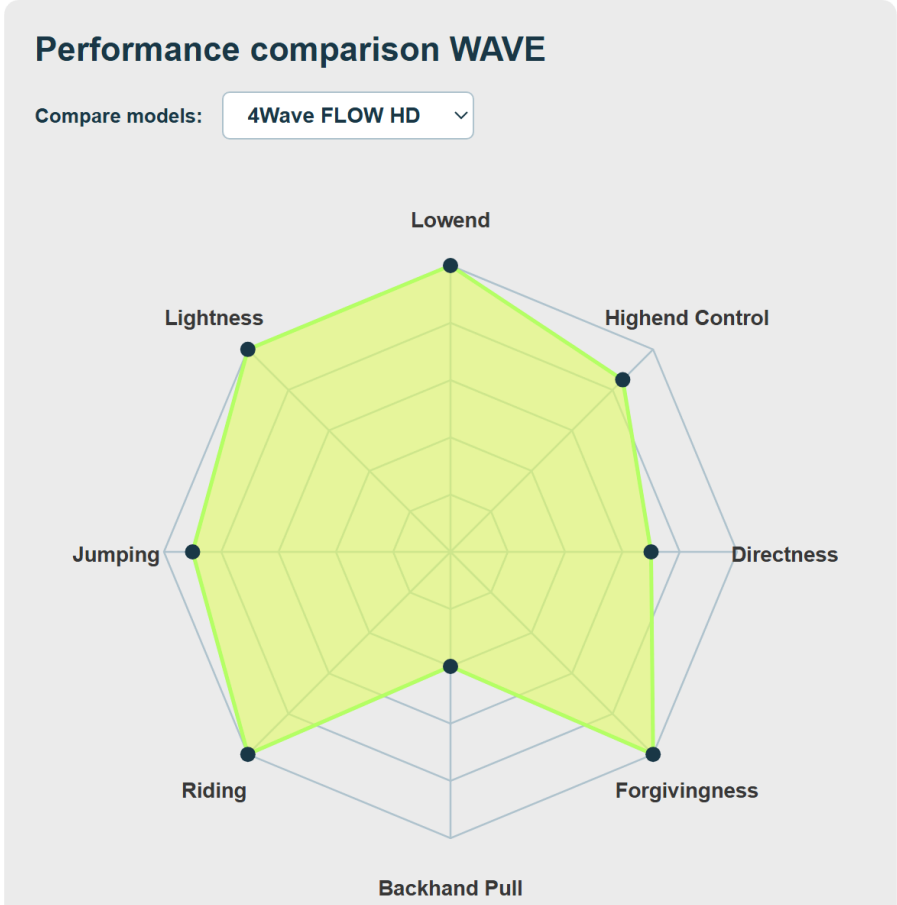

Result of `chart-selector.html` — pick a model from the dropdown to switch datasets.

Radar attributes

Attribute	Required	Description
`data-axes`	yes	Comma list of axis labels.
`data-values`	yes*	Comma list of values 0–100 (*for single-dataset mode).
`<select.patrik-radar-select>`	yes*	Use instead of `data-values` for a switchable chart.
`data-fill`	no	Polygon fill colour.
`data-stroke`	no	Polygon outline colour.
`data-point`	no	Data-point dot colour.
`data-grid`	no	Grid line colour.
`data-axis-color`	no	Axis (spoke) line colour.
`data-label-color`	no	Axis label text colour.

2 Range bars (feel / rider goals)

A range bar shows a **band** (a range, not a single value) between two poles, with a title above and configurable colours. Two modes:

Two-pole mode


A label at each end; the band highlights `data-min` → `data-max` as percentages (0–100).

```
<div class="patrik-range-bar"
     data-title="Power delivery"
     data-left="Direct" data-right="Smooth"
     data-min="25" data-max="62"></div>
```

Scale mode

Evenly spaced stop labels beneath the bar. With `data-scale-index`, `data-min` / `data-max` are **stop indexes** (0-based) instead of percentages.

```
<div class="patrik-range-bar"
     data-title="Rider level"
     data-scale="Entry,Intermediate,Advanced,Pro"
     data-scale-index="true"
     data-min="1" data-max="3"></div>
<!-- band spans Intermediate → Pro -->
```

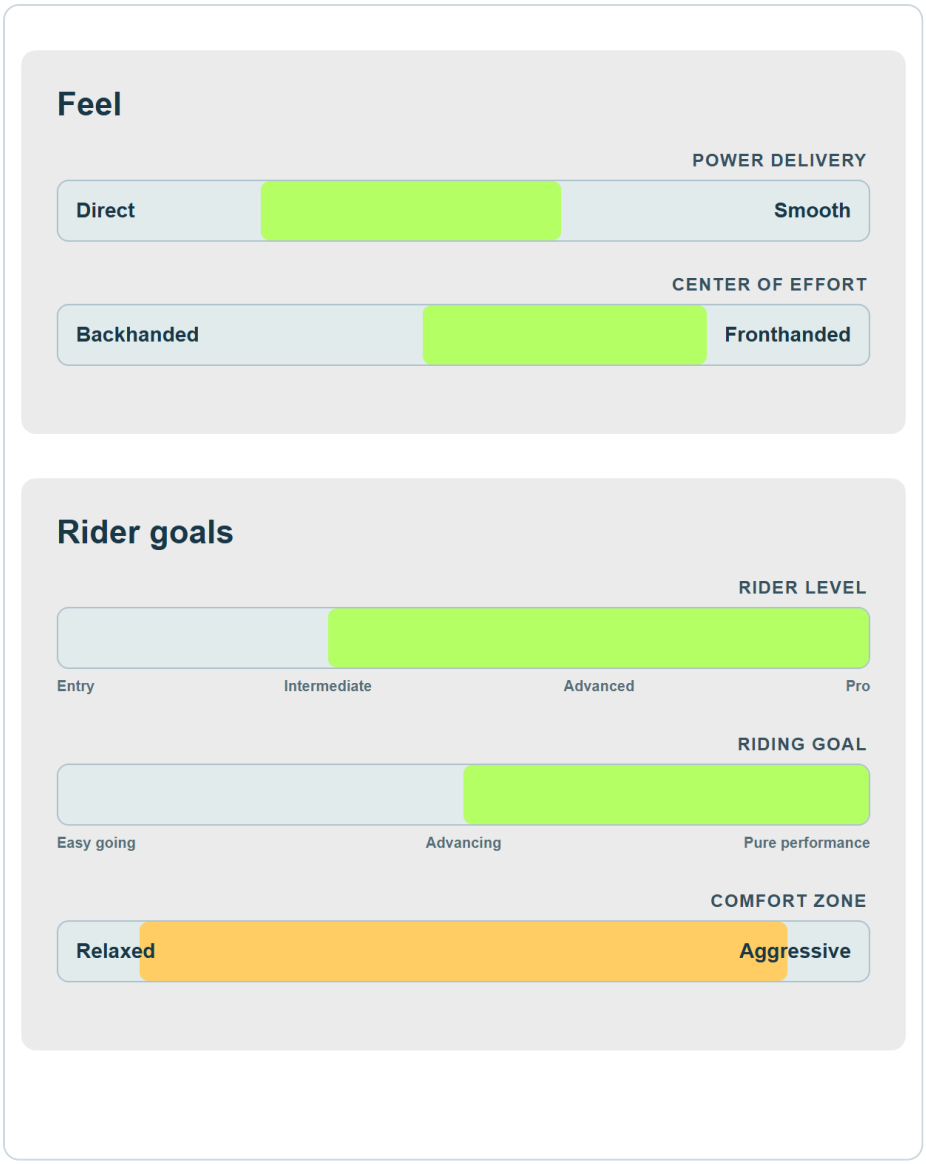

Result of `range-bars.html` — two-pole bars (Feel), scale bars with stops (Rider goals), and a custom-colour example (Comfort zone).

Range-bar attributes

Attribute	Description
`data-title`	Small uppercase title above the bar.
`data-left` / `data-right`	End-pole labels (two-pole mode).
`data-scale`	Comma list of evenly spaced stop labels (scale mode).
`data-scale-index`	Present ⇒ treat min/max as stop indexes, not percentages.
`data-min` / `data-max`	Start / end of the highlighted band.
`data-value`	Optional single marker line (0–100).
`data-range`	Band fill colour.
`data-track`	Track (background) colour.
`data-text`	Label text colour.

`data-border`	Track border colour.

3 Files

- `patrik-components.js` — the shared rendering script (the only script any page loads).
- `chart.html` — single radar chart example.
- `chart-selector.html` — radar chart with a model-comparison dropdown.
- `range-bars.html` — Feel & Rider-goals range bars.

4 Notes

- Load `patrik-components.js` **once** per page, even with many component blocks.
- All colours have sensible defaults (teal `#1a3a4a` + lime `#b4ff64`); only set `data-*` colours to override.
- To re-render after changing the DOM dynamically, call `PatrikComponents.render()` in the console / your own code.
- Colours accept any CSS colour: hex, `rgb()`, `rgba()`, named.