Project "light"

authors (individual or team names) 27/04/2016

Contents

1	Preamble	1
2	Overview	2
3	Load (or simulate) some data	3
4	Explore the data	3
5	Write the model	3
6	Perform inference	4
7	Check assumptions and improve the model	4
8	Appendix	4

1 Preamble

This document was generated from a text file in the Rmd format, especially useful with the free software R (use a recent-enough version).

For an Rmd file to be successfully exported to HTML and PDF, read this page.

Concretely, open R and type:

```
library(rmarkdown)
render("file.Rmd", "all")
```

Any Rmd file is best edited with RStudio, or Emacs with ESS, markdown and polymode.

Example of an equation written in LaTeX (free, online book): $y_i \sim \mathcal{N}(\mu, \sigma^2)$

Example of an unordered list:

- μ
- σ

Example of an ordered list:

 $1. \mu$


$2. \sigma$

Example of **bold** and *italics*.

Example of a plot from R (setting the seed for reproducibility):

```
set.seed(1859)
hist(rnorm(10^4), breaks="FD")
```

Histogram of rnorm(10⁴)

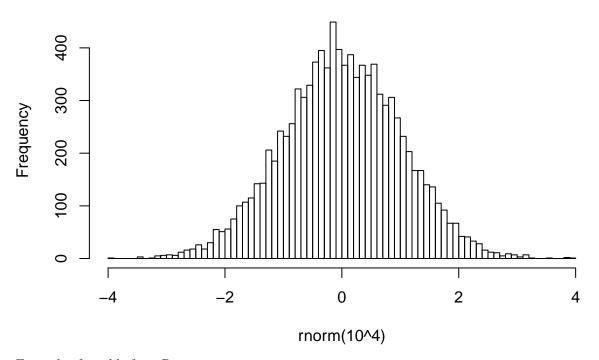

Example of a table from R:

knitr::kable(mtcars[1:5,])

	mpg	cyl	disp	hp	drat	wt	qsec	vs	am	gear	carb
Mazda RX4	21.0	6	160	110	3.90	2.620	16.46	0	1	4	4
Mazda RX4 Wag	21.0	6	160	110	3.90	2.875	17.02	0	1	4	4
Datsun 710	22.8	4	108	93	3.85	2.320	18.61	1	1	4	1
Hornet 4 Drive	21.4	6	258	110	3.08	3.215	19.44	1	0	3	1
Hornet Sportabout	18.7	8	360	175	3.15	3.440	17.02	0	0	3	2

2 Overview

This document is part of project "light". This project is part of a presentation which teaches the fundamentals of reproducible research.

The project directory is organized as advised by Noble (PLoS Computational Biology, 2009).

On any Unix-like system, it is easily done with the following commands:

```
touch AUTHORS COPYING README; mkdir -p doc data src results
```

On any Unix-like system, it can also be easily compressed and transferred:

```
cd ..; tar -czvf project-light.tar.gz \
--exclude="*~" --exclude=".*" project-light
```

This project involves the following persons:

- Firstname Lastname (specify contributions following R guidelines)
- ...

Importantly, before anything else, one must specify all paths relatively to the root of the project:

```
project.name <- "project-light"
project.dir <- ""
if(Sys.info()["user"] == "tflutre"){
    project.dir <- "~/src/tuto-reproducible-research/project-light"
} else if(Sys.info()["user"] == "<collaborator1>"){
    project.dir <- "C:/Documents/tuto-reproducible-research/project-light"
}
stopifnot(file.exists(project.dir))
data.dir <- pasteO(project.dir, "/data")
stopifnot(file.exists(data.dir))
src.dir <- pasteO(project.dir, "/src")
stopifnot(file.exists(src.dir))
## source(pasteO(src.dir, "/utils_project-light.R"))</pre>
```

This document will also require external packages to be available, for instance:

```
## suppressPackageStartupMessages(library(MASS))
```

- 3 Load (or simulate) some data
- . . .
- 4 Explore the data
- . . .
- 5 Write the model

. . .

6 Perform inference

. . .

7 Check assumptions and improve the model

. .

8 Appendix

```
print(sessionInfo(), locale=FALSE)
```

```
## R version 3.2.2 (2015-08-14)
## Platform: x86_64-pc-linux-gnu (64-bit)
## Running under: Ubuntu 14.04.4 LTS
##
## attached base packages:
              graphics grDevices utils datasets methods
## [1] stats
                                                                     base
## other attached packages:
## [1] knitr_1.12.3
                     rmarkdown_0.9.5
## loaded via a namespace (and not attached):
## [1] magrittr_1.5 formatR_1.3 tools_3.2.2
## [5] yaml_2.1.13 Rcpp_0.12.4 stringi_1.0-1
                                                          htmltools_0.3.5
                                                          highr_0.5.1
## [9] stringr_1.0.0 digest_0.6.9 evaluate_0.8.3
```