




Knowledge Graph Embeddings

Theory to Practice

Emanuel Sallinger

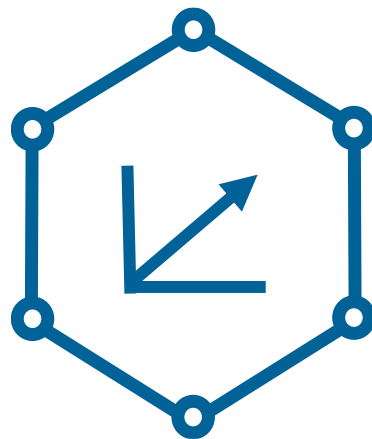

Libraries

 **mommi84 / awesome-kge.md**
Last active 20 days ago

☆ Star 149 Fork 35

<> Code Revisions 15 ☆ Stars 149 Forks 35 Embed <script src="https://g: Download ZIP

Awesome Knowledge Graph Embedding Approaches

awesome-kge.md Raw

Awesome Knowledge Graph Embedding Approaches

 awesome

This list contains repositories of libraries and approaches for knowledge graph embeddings, which are vector representations of entities and relations in a multi-relational directed labelled graph. Licensed under [CC0](#).

Libraries

-  AmpliGraph (4 algorithms) @ <https://github.com/Accenture/AmpliGraph>
- Embedding framework (5 algorithms) @ <https://github.com/BookmanHan/Embedding>
- KB2EP collection (5 algorithms) @ <https://github.com/thunlp/KB2EP>
-  OpenKE (8 algorithms) @ <https://github.com/thunlp/OpenKE>
-  PyKEEN (10 algorithms) @ <https://github.com/SmartDataAnalytics/PyKEEN/>
- Python KGE (6 algorithms) @ <https://github.com/mana-ysh/knowledge-graph-embeddings>
- scikit-kge (3 algorithms) @ <https://github.com/mnack/scikit-kge>
- scikit-tensor (5 algorithms) @ <https://github.com/mnack/scikit-tensor>
- SME (4 algorithms) @ <https://github.com/glorotxa/SME>

Source: <https://gist.github.com/mommi84/07f7c044fa18aaaa7b5133230207d8d4>



Implementations of Approaches

Approaches

- ComplEx @ <https://github.com/ttrouill/complex>
- ComplEx-NNE-AER @ https://github.com/iieir-km/ComplEx-NNE_AER
- ConvE @ <https://github.com/TimDettmers/ConvE>
- EbemKG @ <https://github.com/pminervini/ebemkg>
-  fastText @ <https://github.com/facebookresearch/fastText/tree/master/scripts/kbcompletion>
- HolE @ <https://github.com/mnick/holographic-embeddings>
- Inferbeddings @ <https://github.com/uclmr/inferbeddings>
- KG2Vec @ <https://github.com/AKSW/KG2Vec>
- KGE-LDA @ <https://github.com/yao8839836/KGE-LDA>
- KR-EAR @ <https://github.com/thunlp/KR-EAR>
- LiteralE @ <https://github.com/SmartDataAnalytics/LiteralE>
- mFold @ <https://github.com/v-shinc/mFoldEmbedding>
- Neural-LP @ <https://github.com/fanyangxyz/Neural-LP>
- ProjE @ <https://github.com/bxshi/ProjE>
- RDF2Vec @ <http://data.dws.informatik.uni-mannheim.de/rdf2vec/code/>
- Resource2Vec @ <https://github.com/AKSW/Resource2Vec/tree/master/resource2vec-core>
- TranslatingModel @ <https://github.com/ZichaoHuang/TranslatingModel>
- wiki2vec (for DBpedia only) @ <https://github.com/idio/wiki2vec>

Source: <https://gist.github.com/mommi84/07f7c044fa18aaaa7b5133230207d8d4>



Libraries

 **mommi84 / awesome-kge.md**
Last active 20 days ago

☆ Star 149 Fork 35

<> Code Revisions 15 ☆ Stars 149 Forks 35 Embed <script src="https://g: Download ZIP

Awesome Knowledge Graph Embedding Approaches

awesome-kge.md Raw

Awesome Knowledge Graph Embedding Approaches

 awesome

This list contains repositories of libraries and approaches for knowledge graph embeddings, which are vector representations of entities and relations in a multi-relational directed labelled graph. Licensed under [CC0](#).

Libraries

-  AmpliGraph (4 algorithms) @ <https://github.com/Accenture/AmpliGraph>
- Embedding framework (5 algorithms) @ <https://github.com/BookmanHan/Embedding>
- KB2EP collection (5 algorithms) @ <https://github.com/thunlp/KB2EP>
-  OpenKE (8 algorithms) @ <https://github.com/thunlp/OpenKE>
-  PyKEEN (10 algorithms) @ <https://github.com/SmartDataAnalytics/PyKEEN/>
- Python KGE (6 algorithms) @ <https://github.com/mana-ysh/knowledge-graph-embeddings>
- scikit-kge (3 algorithms) @ <https://github.com/mnack/scikit-kge>
- scikit-tensor (5 algorithms) @ <https://github.com/mnack/scikit-tensor>
- SME (4 algorithms) @ <https://github.com/glorotxa/SME>


Source: <https://gist.github.com/mommi84/07f7c044fa18aaaa7b5133230207d8d4>



PyKEEN

Source: <https://github.com/pykeen/pykeen>

README.md



PyKEEN

Tests master **passing** License **MIT** DOI **10.5281/zenodo.4581482** Optuna **integrated**

PyKEEN (Python KnowlEdge EmbeddiNGs) is a Python package designed to train and evaluate knowledge graph embedding models (incorporating multi-modal information).

[Installation](#) • [Quickstart](#) • [Datasets](#) • [Models](#) • [Support](#) • [Citation](#)

Installation **python 3.7 | 3.8** **pypi v1.4.0**



PyKEEN

Source: <https://github.com/pykeen/pykeen>

Quickstart docs passing

This example shows how to train a model on a dataset and test on another dataset.

The fastest way to get up and running is to use the pipeline function. It provides a high-level entry into the extensible functionality of this package. The following example shows how to train and evaluate the [TransE](#) model on the [Nations](#) dataset. By default, the training loop uses the [stochastic local closed world assumption \(sLCWA\)](#) training approach and evaluates with [rank-based evaluation](#).

```
from pykeen.pipeline import pipeline

result = pipeline(
    model='TransE',
    dataset='nations',
)
```

The results are returned in an instance of the [PipelineResult](#) dataclass that has attributes for the trained model, the training loop, the evaluation, and more. See the tutorials on [understanding the evaluation](#) and [making novel link predictions](#).



PyKEEN

Source: <https://github.com/pykeen/pykeen>

Datasets (25)

The citation for each dataset corresponds to either the paper describing the dataset, the first paper published using the dataset with knowledge graph embedding models, or the URL for the dataset if neither of the first two are available.

Name	Documentation	Citation	Entities	Relations
Clinical Knowledge Graph	pykeen.datasets.CKG	Santos et al., 2020	7617419	11
CoDEX (large)	pykeen.datasets.CoDEXLarge	Safavi et al., 2020	77951	69
CoDEX (medium)	pykeen.datasets.CoDEXMedium	Safavi et al., 2020	17050	51
CoDEX (small)	pykeen.datasets.CoDEXSmall	Safavi et al., 2020	2034	42
ConceptNet	pykeen.datasets.ConceptNet	Speer et al., 2017	28370083	50
Countries	pykeen.datasets.Countries	ZhenfengLei/KGDatasets	271	2
Commonsense Knowledge Graph	pykeen.datasets.CSKG	Ilievski et al., 2020	2087833	58
DB100K	pykeen.datasets.DB100K	Ding et al., 2018	99604	470
DBpedia50	pykeen.datasets.DBpedia50	Shi et al., 2017	24624	351
Drug Repositioning Knowledge Graph	pykeen.datasets.DRKG	gnn4dr/DRKG	97238	107
FB15k	pykeen.datasets.FB15k	Bordes et al., 2013	14951	1345
FB15k-237	pykeen.datasets.FB15k237	Toutanova et al., 2015	14505	237
Hetionet	pykeen.datasets.Hetionet	Himmelstein et al., 2017	45158	24
Kinships	pykeen.datasets.Kinships	ZhenfengLei/KGDatasets	104	25
Nations	pykeen.datasets.Nations	ZhenfengLei/KGDatasets	14	55
OGB BioKG	pykeen.datasets.OGBBioKG	Hu et al., 2020	45085	51
OGB WikiKG	pykeen.datasets.OGBWikiKG	Hu et al., 2020	2500604	535
OpenBioLink	pykeen.datasets.OpenBioLink	Breit et al., 2020	180992	28
OpenBioLink (F1)	pykeen.datasets.OpenBioLinkF1	PyKEEN/pykeen-openbiolink-benchmark	116425	19
OpenBioLink (F2)	pykeen.datasets.OpenBioLinkF2	PyKEEN/pykeen-openbiolink-benchmark	110628	17

Models (25)

Name	Reference	Citation
Complex	pykeen.models.Complex	Trouillon et al., 2016
ComplexLiteral	pykeen.models.ComplexLiteral	Kristiadi et al., 2018
ConvE	pykeen.models.ConvE	Dettmers et al., 2018
ConvKB	pykeen.models.ConvKB	Nguyen et al., 2018
DistMult	pykeen.models.DistMult	Yang et al., 2014
DistMultLiteral	pykeen.models.DistMultLiteral	Kristiadi et al., 2018
ERMLP	pykeen.models.ERMLP	Dong et al., 2014
ERMLPE	pykeen.models.ERMLPE	Sharifzadeh et al., 2019
HolE	pykeen.models.HolE	Nickel et al., 2016
KG2E	pykeen.models.KG2E	He et al., 2015
MuRE	pykeen.models.MuRE	Balažević et al., 2019
NTN	pykeen.models.NTN	Socher et al., 2013
PairRE	pykeen.models.PairRE	Chao et al., 2020
ProjE	pykeen.models.ProjE	Shi et al., 2017
RESCAL	pykeen.models.RESCAL	Nickel et al., 2011
RGCN	pykeen.models.RGCN	Schlichtkrull et al., 2018
RotatE	pykeen.models.RotatE	Sun et al., 2019
SimpleE	pykeen.models.SimpleE	Kazemi et al., 2018
StructuredEmbedding	pykeen.models.StructuredEmbedding	Bordes et al., 2011
TransD	pykeen.models.TransD	Ji et al., 2015
TransE	pykeen.models.TransE	Bordes et al., 2013



PyKEEN

Source: <https://github.com/pykeen/pykeen>

Losses (7)

Name	Reference	Description
bceaftersigmoid	pykeen.losses.BCEAfterSigmoidLoss	A module for the numerically unstable version of explicit Sigmoid + BCE loss.
bcewithlogits	pykeen.losses.BCEWithLogitsLoss	A module for the binary cross entropy loss.
crossentropy	pykeen.losses.CrossEntropyLoss	A module for the cross entropy loss that evaluates the cross entropy after softmax output.
marginranking	pykeen.losses.MarginRankingLoss	A module for the margin ranking loss.
mse	pykeen.losses.MSELoss	A module for the mean square error loss.

Regularizers (5)

Name	Reference	Description
combined	pykeen.regularizers.CombinedRegularizer	A convex combination of regularizers.
lp	pykeen.regularizers.LpRegularizer	A simple L_p norm based regularizer.
no	pykeen.regularizers.NoRegularizer	A regularizer which does not perform any regularization.
powersum	pykeen.regularizers.PowerSumRegularizer	A simple x^p based regularizer.
tranh	pykeen.regularizers.TransHRegularizer	A regularizer for the soft constraints in TransH.

Training Loops (2)

Name	Reference	Description
lcwa	pykeen.training.LCWATrainingLoop	A training loop that uses the local closed world assumption training approach.
slcwa	pykeen.training.SLCWATrainingLoop	A training loop that uses the stochastic local closed world assumption training approach.

Negative Samplers (2)

Name	Reference	Description
basic	pykeen.sampling.BasicNegativeSampler	A basic negative sampler.
bernoulli	pykeen.sampling.BernoulliNegativeSampler	An implementation of the Bernoulli negative sampling approach proposed by [wang2014]_.

Stoppers (2)

Name	Reference	Description
early	pykeen.stoppers.EarlyStopper	A harness for early stopping.
nop	pykeen.stoppers.NopStopper	A stopper that does nothing.



Algorithm 1 Learning TransE

input Training set $S = \{(h, \ell, t)\}$, entities and rel. sets E and L , margin γ , embeddings dim. k .

```
1: initialize  $\ell \leftarrow \text{uniform}(-\frac{6}{\sqrt{k}}, \frac{6}{\sqrt{k}})$  for each  $\ell \in L$ 
2:            $\ell \leftarrow \ell / \|\ell\|$  for each  $\ell \in L$ 
3:            $\mathbf{e} \leftarrow \text{uniform}(-\frac{6}{\sqrt{k}}, \frac{6}{\sqrt{k}})$  for each entity  $e \in E$ 
4: loop
5:    $\mathbf{e} \leftarrow \mathbf{e} / \|\mathbf{e}\|$  for each entity  $e \in E$ 
6:    $S_{batch} \leftarrow \text{sample}(S, b)$  // sample a minibatch of size  $b$ 
7:    $T_{batch} \leftarrow \emptyset$  // initialize the set of pairs of triplets
8:   for  $(h, \ell, t) \in S_{batch}$  do
9:      $(h', \ell, t') \leftarrow \text{sample}(S'_{(h, \ell, t)})$  // sample a corrupted triplet
10:     $T_{batch} \leftarrow T_{batch} \cup \{((h, \ell, t), (h', \ell, t'))\}$ 
11:  end for
12:  Update embeddings w.r.t.  $\sum_{((h, \ell, t), (h', \ell, t')) \in T_{batch}} \nabla [\gamma + d(\mathbf{h} + \ell, \mathbf{t}) - d(\mathbf{h}' + \ell, \mathbf{t}')]_+$ 
13: end loop
```

Random (smart) initialization

Vertex normalization

Positive sample

Negative sample

Stochastic Gradient Descent update phase



Algorithm 1 Learning TransE

input Training set $S = \{(h, \ell, t)\}$, entities and rel. sets E and L , margin γ , embeddings dim. k .

```
1: initialize  $\ell \leftarrow \text{uni}$ 
2:    $\ell \leftarrow \ell /$ 
3:    $e \leftarrow \text{uni}$ 
4: loop
5:    $e \leftarrow e / \|e\|$  for
6:    $S_{batch} \leftarrow \text{sample}$ 
7:    $T_{batch} \leftarrow \emptyset$  // in
8:   for  $(h, \ell, t) \in S_{batch}$  do
9:      $(h', \ell, t') \leftarrow \text{sample}(S'_{(h, \ell, t)})$  // sample a corrupted triplet
10:     $T_{batch} \leftarrow T_{batch} \cup \{((h, \ell, t), (h', \ell, t'))\}$ 
11:  end for
12:  Update embeddings w.r.t.  $\sum_{((h, \ell, t), (h', \ell, t')) \in T_{batch}} \nabla [\gamma + d(h + \ell, t) - d(h' + \ell, t')]_+$ 
13: end loop
```

Negative Samplers (2)

Name	Reference	Description
basic	<code>pykeen.sampling.BasicNegativeSampler</code>	A basic negative sampler.
bernoulli	<code>pykeen.sampling.BernoulliNegativeSampler</code>	An implementation of the Bernoulli negative sampling approach proposed by [wang2014].

Negative sample

Stochastic
Gradient Descent
update phase



Algorithm 1 Learning TransE

input Training set $S = \{(h, \ell, t)\}$, entities and rel. sets E and L , margin γ , embeddings dim. k .

```

1: initialize  $\ell \leftarrow \text{uniform}(-\frac{6}{\sqrt{k}}, \frac{6}{\sqrt{k}})$ 
2:    $\ell \leftarrow \ell / \|\ell\|$  for each  $\ell \in L$ 
3:    $e \leftarrow \text{uniform}(-\frac{6}{\sqrt{k}}, \frac{6}{\sqrt{k}})$ 

```

```

4: loop
5:    $e \leftarrow e / \|e\|$  for each entity  $e \in E$ 

```

```

6:    $S_{batch} \leftarrow \text{sample}(S, b)$  // sample

```

```

7:    $T_{batch} \leftarrow \emptyset$  // initialize the set of

```

```

8:   for  $(h, \ell, t) \in S_{batch}$  do

```

```

9:      $(h', \ell, t') \leftarrow \text{sample}(S'_{(h, \ell, t)})$  //

```

```

10:     $T_{batch} \leftarrow T_{batch} \cup \{(h, \ell, t), (h', \ell, t')\}$ 

```

```

11:   end for

```

```

12:   Update embeddings w.r.t.

```

$$\sum_{((h, \ell, t), (h', \ell, t')) \in T_{batch}} \nabla [\gamma + d(h + \ell, t) - d(h' + \ell, t')]_+$$

```


13: end loop


```

Losses (7)

Name	Reference	Description
bceaftersigmoid	pykeen.losses.BCEAfterSigmoidLoss	A module for the numerically unstable version of explicit Sigmoid + BCE loss.
bcewithlogits	pykeen.losses.BCEWithLogitsLoss	A module for the binary cross entropy loss.
crossentropy	pykeen.losses.CrossEntropyLoss	A module for the cross entropy loss that evaluates the cross entropy after softmax output.
marginranking	pykeen.losses.MarginRankingLoss	A module for the margin ranking loss.
mse	pykeen.losses.MSELoss	A module for the mean square error loss.

Stochastic
Gradient Descent
update phase

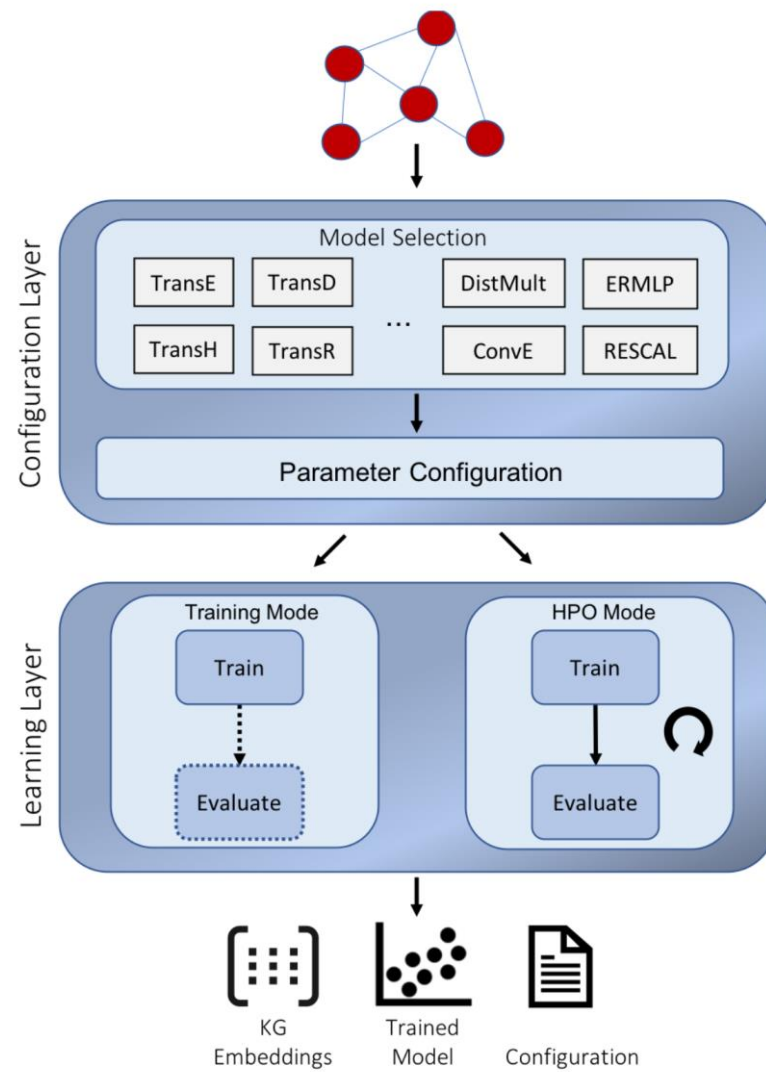

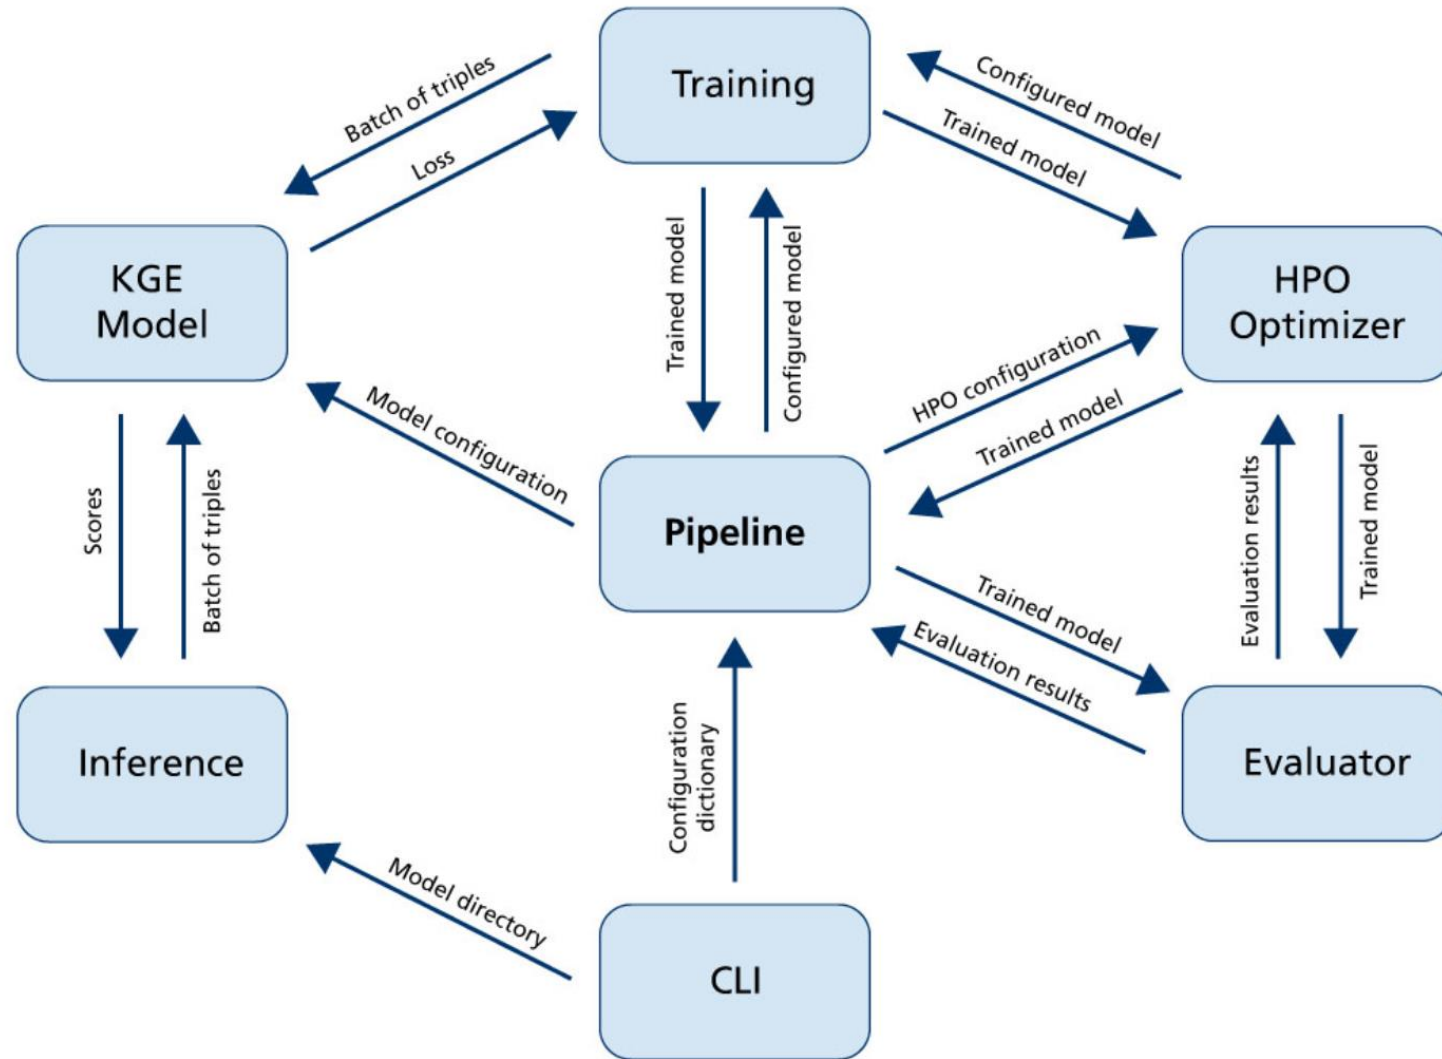



Libraries

 **mommi84 / awesome-kge.md**
Last active 20 days ago

☆ Star 149 Fork 35

<> Code Revisions 15 ☆ Stars 149 Forks 35 Embed <script src="https://g: Download ZIP

Awesome Knowledge Graph Embedding Approaches

awesome-kge.md Raw

Awesome Knowledge Graph Embedding Approaches


 awesome

This list contains repositories of libraries and approaches for knowledge graph embeddings, which are vector representations of entities and relations in a multi-relational directed labelled graph. Licensed under [CC0](#).

Libraries

-  AmpliGraph (4 algorithms) @ <https://github.com/Accenture/AmpliGraph>
- Embedding framework (5 algorithms) @ <https://github.com/BookmanHan/Embedding>
- KB2EP collection (5 algorithms) @ <https://github.com/thunlp/KB2EP>
-  OpenKE (8 algorithms) @ <https://github.com/thunlp/OpenKE>
-  PyKEEN (10 algorithms) @ <https://github.com/SmartDataAnalytics/PyKEEN/>
- Python KGE (6 algorithms) @ <https://github.com/mana-ysh/knowledge-graph-embeddings>
- scikit-kge (3 algorithms) @ <https://github.com/mnack/scikit-kge>
- scikit-tensor (5 algorithms) @ <https://github.com/mnack/scikit-tensor>
- SME (4 algorithms) @ <https://github.com/glorotxa/SME>

Source: <https://gist.github.com/mommi84/07f7c044fa18aaaa7b5133230207d8d4>

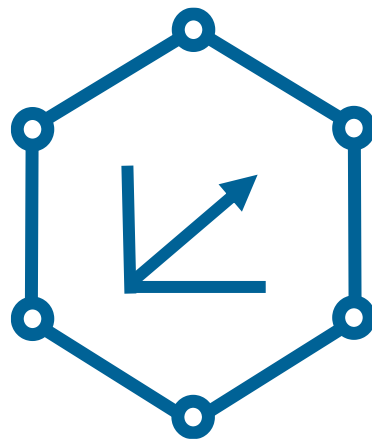

Knowledge Graph Embeddings

Theory to Practice

Emanuel Sallinger