

(a) Warehouse: score s_l of each location for the arriving unit

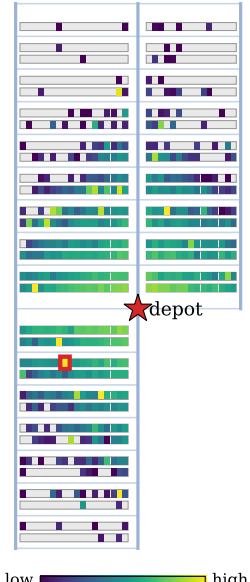

(b) Linear putaway policy: input and output for one decision t (one arriving unit)

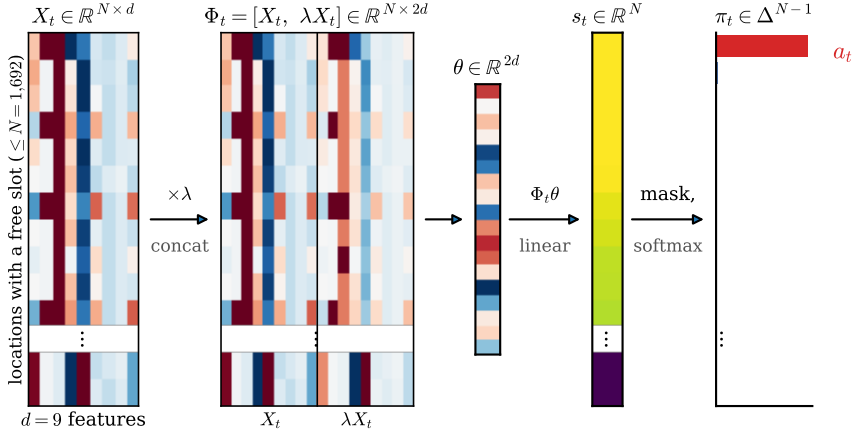

Training (RL): sample $a_t \sim \pi_t$; reward = mixing change $\times$ waves left, plus a route term after each wave; update $\theta \leftarrow \theta + \eta\, \hat{A}_t\, \nabla_\theta \log \pi_t(a_t)$ with $\nabla_\theta \log \pi_t(a) = \phi_{t,a} - \sum_l \pi_{t,l}\, \phi_{t,l}$.

Test: $a_t = \arg\max_l s_{t,l}$ over free locations. Rows sorted by score (best first); full locations are masked.