with rasterio.open('filepath/name.tif',mode='r') as src:

src.profile = dictionary of all attributes

src.meta = dictionary of key attributes

src.name = file name

Pixel (0,0)

src.width (in pixels)

src.bounds.top (in CRS units)

src.height (in pixels)

src.bounds.left (in CRS units)

src.shape = (width, height) in pixels

src.bounds.right (in CRS units)

src.bounds.bottom (in CRS units)

src.crs
= get CRS authority and description

src.crs.to_epsg()
= get EPSG number of CRS

(c, f) of Pixel (0,0) locates top left pixel of image on map

Pixel (0,0)

e

a

src.res = (a,e)

src.transform
= get Affine matrix object

src.get_transform
= get Affine matrix as list
[[a , b , c], [d , e , f]]

src.transform.a = pixel width in CRS units, *positive*
src.transform.b = row rotation, *usually 0*
src.transform.c = x-coordinate in CRS, *upper left pixel*
src.transform.d = column rotation, *usually 0*
src.transform.e = pixel height in CRS units, *negative*
src.transform.f = y-coordinate in CRS, *upper left pixel*

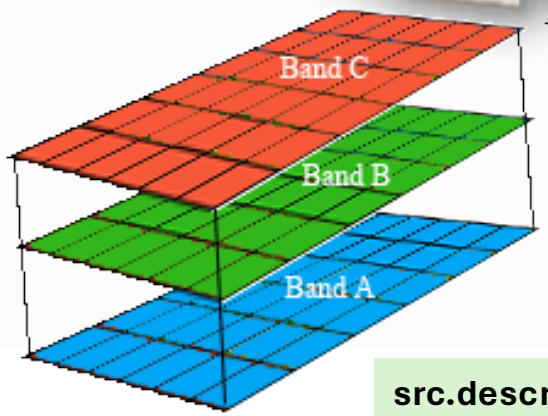

src.count = number of bands

src.indexes = band indexes (1, 2, 3...)

src.descriptions = band descriptions (if present)

Geoff Timms, College of Charleston