

PyMuPDF Documentation

version 1.7

Ruikai Liu

Jorj McKie

June 24, 2015

Contents

The PyMuPDF Documentation	1
Introduction	1
Installation	2
Step 1: Download PyMuPDF	2
Step 2: Download MuPDF 1.7a	2
Step 3: Build / Setup PyMuPDF	2
Note on Using UPX on Windows	2
Tutorial	3
Import the Bindings	3
Open a Document	3
Some <i>Document</i> methods and attributes	3
Access Meta Data	3
Work with Outlines	4
Some <i>Outline</i> methods and attributes	4
Some Outline.dest attributes	4
Work with Pages	4
Inspect the links on a <i>Page</i>	4
Render a <i>Page</i>	5
Save the page image in a file	5
Use the image in a dialog manager	5
Extract and search for text of a <i>Page</i>	6
Output	6
Close	6
Classes	8
Colorspace	9
Device	10
DisplayList	11
Document	12
Identity	15
IRect	16
Link	17
linkDest	18
Matrix	20
Shifting	22
Flipping	22
Shearing	23
Rotating	24
Outline	25
Page	26
Pixmap	27

Point	29
Rect	30
TextPage	32
TextSheet	33
Constants and Enumerations	34
Constants	34
Enumerations	34
Index	35

The PyMuPDF Documentation

Introduction

PyMuPDF (formerly known as python-fitz) is a Python binding for [MuPDF](#) - "a lightweight PDF and XPS viewer".

MuPDF can access files in PDF, XPS, OpenXPS, CBZ (comic book) and EPUB (e-book) formats.

These are files with extensions `*.pdf`, `*.xps`, `*.oxps`, `*.cbz` or `*.epub` (so in essence, with this binding you can develop **e-book viewers in Python** ...)

PyMuPDF provides access to all important functions of MuPDF from within a Python environment. Nevertheless, we will always consider expanding this function set.

MuPDF stands out among all similar products for its top rendering capability and unsurpassed processing speed.

You can check this out yourself: Compare the various free PDF-viewers. In terms of speed and rendering quality [SumatraPDF](#) ranges at the top (apart from MuPDF's own standalone viewer) - and it is based on MuPDF!

While PyMuPDF has been available since several years for an earlier version of MuPDF (1.2), it was until only mid May 2015, that its creator and a few co-workers decided to elevate it to support the current release of MuPDF (1.7a).

And we are determined to keep PyMuPDF current with future MuPDF changes!

This work is now completed.

PyMuPDF has been tested on Linux, Windows 7 and up, Python 2 and Python 3 (x86 versions). Other OS platforms should work too as long as MuPDF supports them.

So, what do we have?

- We have ready and working installation procedures for Linux and Windows.
- We have example and demo scripts for typical use cases that you can take as templates for your development.
- Compared to version 1.2, we have greatly simplified the installation procedure for Windows and Linux platforms.

We invite you to join our efforts by contributing to the the wiki pages, by using what is there - and, of course, by submitting issues and bugs to the site!

Installation

This describes how to install PyMuPDF.

Step 1: Download PyMuPDF

Download this repository and unzip it. This will give you a folder, let us call it `PyFitz`.

Step 2: Download MuPDF 1.7a

Download [MuPDF version 1.7a source](#), and unzip it. Let us call the resulting folder `mupdf17`.

Put it inside `PyFitz` as a subdirectory, if you want to keep everything in one place.

Step 3: Build / Setup PyMuPDF

If necessary, adjust the `setup.py` script now. E.g. make sure that

- the include directory is correctly set in sync with your directory structure

It is no longer necessary to generate MuPDF object code if your platform is either Windows or Linux. The required object libraries for these two platforms have been put into respective directories, and the `setup` script has been updated. These are the names of those directories:

- `LibLinux` - for the Linux-generated MuPDF libraries
- `LibWin32` - for the Windows-generated MuPDF libraries

Now perform a `python setup.py install`

Note on Using UPX on Windows

In Windows systems, your PyMuPDF installation will end up with three files: `__init__.py`, `fitz.py` and `_fitz.pyd` in the `site-packages` directory. The PYD file is Python's DLL version on Windows systems. `_fitz.pyd` has a size of 9.5 to 10 MB. You can reduce this by applying the compression utility UPX to it: `upx -9 _fitz.pyd`. This will reduce the file to about 4.5 MB. This should reduce load times (`import fitz` statement) while keeping it fully functional.

Tutorial

This tutorial will show you the use of MuPDF in Python step by step.

Because MuPDF supports not only PDF, but also XPS, OpenXPS and EPUB formats, so does PyMuPDF. Nevertheless we will only talk about PDF files for the sake of brevity.

As for string handling, MuPDF will pass back any string as UTF-8 encoded - no exceptions. Where this binding has added functionality, we usually decode string to unicode. An example is the `Document.ToC()` method.

Import the Bindings

The Python bindings to MuPDF are made available by this import statement:

```
import fitz
```

Open a Document

In order to access a supported document, it must be opened with the following statement:

```
doc = fitz.Document(filename)
```

This will create `doc` as a *Document* object. `filename` must be a Python string or unicode object that specifies the name of an existing file (with or without a fully or partially qualified path). A *Document* contains several attributes and functions. Among them are meta information (like "author" or "subject"), number of total pages, outline and encryption information.

Some Document methods and attributes

Method / Attribute	Description
<code>Document.pageCount</code>	Number of pages of <code>filename</code> (integer).
<code>Document.metadata</code>	Metadata of the <i>Document</i> (dictionary).
<code>Document.outline</code>	First outline entry of <i>Document</i>
<code>Document.ToC()</code>	Table of contents of <i>Document</i> (list).
<code>Document.loadPage()</code>	Create a <i>Page</i> object.

Access Meta Data

`Document.metadata` is a Python dictionary with the following keys. For details of their meanings and formats consult the PDF manuals, e.g. [Adobe PDF Reference sixth edition 1.7 November 2006](#). Some details can also be found in the chapter for *Document*. The meta data fields are of type string if not otherwise indicated and may be missing, in which case they contain `None`.

Key	Value
<code>producer</code>	Producer (producing software)
<code>format</code>	PDF format, e.g. 'PDF 1.4'
<code>encryption</code>	Encryption method used
<code>author</code>	Author
<code>modDate</code>	Date of last modification
<code>keywords</code>	Keywords (dictionary)

<code>title</code>	Title
<code>creationDate</code>	Date of creation
<code>creator</code>	Creating application
<code>subject</code>	Subject

Work with Outlines

Entering the documents outline tree works like this:

```
ollItem = doc.outline # the document's first outline item
```

This creates ollItem as an [Outline](#) object.

Some Outline methods and attributes

Method / Attribute	Description
<code>Outline.saveText()</code>	Save table of contents as a text file
<code>Outline.saveXML()</code>	Save table of contents as a quasi-XML file
<code>Outline.next</code>	Next item of the same level
<code>Outline.down</code>	Next item one level down
<code>Outline.title</code>	Title of this item (UTF-8)
<code>Outline.dest</code>	Destination ('where does this entry point to?')

Some `Outline.dest` attributes

Attribute	Description
<code>Outline.dest.page</code>	Target page number
<code>Outline.dest.lt</code>	Top-left corner of target rectangle
<code>Outline.dest.rb</code>	Bottom-right corner of target rectangle

MuPDF also supports outline destinations to other files and to URIs. See [Outline](#).

In order to get a document's table of contents as a Python list, use the following function:

```
toc = doc.ToC() # [[level, title, page], ..., or []]
```

Work with Pages

Tasks that can be performed with a [Page](#) are at the core of MuPDF's functionality. Among other things, you can render a [Page](#), optionally zooming, rotating or shearing it. You can write it's image to files (in PNG format), extract text from it or perform searches for text elements. At first, a page object must be created:

```
page = doc.loadPage(n) # represents page n of the document
```

Here are some typical uses of [Page](#) objects:

Inspect the links on a Page

Here is an example that displays all links and their types:


```

#-----
# Get all links of the current page
#-----
ln = page.loadLinks()
#-----
# Links are organized as a single linked list. We need to check each occurrence
# to see what info we can get
#-----
while ln:
    if ln.dest.kind == fitz.LINK_URI:
        print '[LINK]URI: %s' % ln.dest.uri
    elif ln.dest.kind == fitz.LINK_GOTO:
        print '[LINK]jump to page %d' % ln.dest.page
    else:
        pass
    ln = ln.next

```

Render a Page

This example creates an image out a page's content:

```

#-----
# Get the page's rectangle
#-----
rect = page.bound()
#-----
# create the smallest pixel area containing the rectangle
#-----
irect = rect.round()
#-----
# create an empty RGBA pixel map of the pixel area's size
#-----
pix = fitz.Pixmap(fitz.Colorspace(fitz.CS_RGB), irect)
pix.clearWith(255)           # Initialize with color "white" and "no transparency"
dev = fitz.Device(pix)       # Create a draw device for the pixel map
page.run(dev, fitz.Identity) # finally render the page with no changes
#-----
# now pix contains an image of the page, ready to be used
#-----

```

Save the page image in a file

We can simply store the image in a PNG file:

```
pix.writePNG("test.png")
```

Use the image in a dialog manager

Or we convert the image into a bitmap usable by a dialog manager.

wxPython:

```

data = pix.samples           # data = bytearray of raw pixel data (RGBA)
bitmap = wx.BitmapFromBufferRGBA(irect.width,
                                irect.height, str(data)) # wxPython only accepts strings, no bytearrays

```

Tkinter:

```

data = pix.samples
img = Image.frombytes("RGBA", [irect.width, irect.height], str(data))
photo = ImageTk.PhotoImage(img)

```

Extract and search for text of a Page

We can also extract all text of a page in a big chunk of string:

```
dl = fitz.DisplayList()           # create a DisplayList
ts = fitz.TextSheet()            # create a TextSheet
tp = fitz.TextPage()             # create a TextPage
dev = fitz.Device(ts, tp)        # create a text Device
# now run the page through the created device
dl.run(dev, fitz.Identity, irect)
# Extract the complete text of the page now contained in the TextPage.
# Includes all whitespace (tabulation, end-of-line, etc.) characters, too.
text = tp.extractText()          # remember: UTF-8 encoding!
```

If you want even more details you can determine, exactly where on a page a certain string appears:

```
# search for at most 4 page locations with specific contents
res = tp.search('MuPDF', 4)
```

The result `res` will now be `[]` or a list of no more than 4 *IRect* rectangles that contain the string 'MuPDF'. The `maxhit` parameter (in our case set to 4) is optional defaulting to 16.

Output

Output capabilities of MuPDF (such as PDF generation) are currently very limited. However, a copy of the currently opened document can be created.

We support this with the method `Document.save()`. If the document had been successfully decrypted before, `save()` will create a decrypted copy.

In addition, this method will also perform some clean-up:

If the document contains invalid or broken cross references, the saved version will have them corrected, which makes it readable by other Python PDF software, like [pdfcrowd](#) and [PyPDF2](#). In many cases, the saved version will also be smaller than the original.

`Document.save()` now supports several options of MuPDF's standalone utility `mutool clean`.

Option	Effect
<code>garbage = 1</code>	garbage collect unused objects
<code>garbage = 2</code>	in addition to 1, compact xref tables
<code>garbage = 3</code>	in addition to 2, merge duplicate objects
<code>clean = 1</code>	clean content streams (use with care)
<code>deflate = 1</code>	deflate uncompressed streams

Please note, that `Document.save()`, according to MuPDF's documentation is still under development and therefore prone to future changes.

Like with `mutool clean`, not all combinations of the above options may work for all documents - so use them with care.

We have found, that the most stable combination seems to be `mutool clean -ggg -z`, which corresponds to `doc.save(filename, garbage=3, deflate=1)`. This is also considerably faster than including the `clean=1` option.

Close

In some situations it may be desirable to "close" a *Document* such that it becomes fully available again to other tasks and / or the operating system. This can be achieved by the `Document.close()` method.

Caution:

After close, the document and all objects referencing it will be invalid and **must not be used anymore**. This binding includes protection against most such invalid uses by disabling properties and methods of the *Document* and any `Document.loadPage()` objects.

However, re-opening a previously closed file by a new *Document* is no problem. Please also do have a look at the following valid example:

```
doc = fitz.Document(fold)           # open a document
<... some statements ...>          # e.g. decryption
doc.save(fnew, garbage=3, deflate=1) # save a decrypted / compressed version
doc.close()                         # close input file
os.remove(fold)                     # remove it
os.rename(fnew, fold)                # rename the decrypted / cleaned version
doc = fitz.Document(fold)           # use it as input for MuPDF
```

Classes

The list of PyMuPDF classes, accessible via the prefix `fitz`. if your import statement was `import fitz`

Class	Short Description
<i>Colorspace</i>	Define the color space of a <i>Pixmap</i> .
<i>Device</i>	Target object for rendering or text extraction.
<i>DisplayList</i>	A list containing drawing commands.
<i>Document</i>	Basic class for dealing with files.
<i>Identity</i>	The do-nothing <i>Matrix</i>
<i>IRect</i>	A rectangle (pixel coordinates).
<i>Link</i>	A destination
<i>linkDest</i>	The destination of an outline entry
<i>Matrix</i>	A 3x3 matrix used for transformations.
<i>Outline</i>	Outline element (a.k.a. bookmark).
<i>Page</i>	A document page.
<i>Pixmap</i>	A pixel map (for rendering).
<i>Point</i>	Represents a point in the plane.
<i>Rect</i>	A rectangle (float coordinates).
<i>TextPage</i>	Text content of a page.
<i>TextSheet</i>	A list of text styles used in a page.

Colorspace

Represents the color space of a *Pixmap*.

Class API

class **Colorspace**

__init__ (*self*, *colorspace*, *irect*)

Constructor

colorspace

A number identifying the colorspace. Currently only RGBA is supported (`fitz.CS_RGB`).

Type: int

irect

A *IRect* object representing the area of the image.

Type: instance

Device

The different format handlers (pdf, xps, etc.) interpret pages to a "device". These devices are the basis for everything that can be done with a page: rendering, text extraction and searching. The device type is determined by the selected construction method.

Class API

class Device

`__init__ (self, object)`

Constructor for either a pixel map or a display list device.

`object`

An object representing one of *Pixmap*, or *DisplayList*

Type: instance

`__init__ (self, textsheet, textpage)`

Constructor for a text page device.

`textsheet`

A *TextSheet* object.

Type: instance

`textpage`

A *TextPage* object.

Type: instance

DisplayList

DisplayList is a list containing drawing commands (text, images, etc.). The intent is two-fold:

1. as a caching-mechanism to reduce parsing of a page
2. as a data structure in multi-threading setups, where one thread parses the page and another one renders pages.

A `DisplayList` is populated with objects from a page by running `Page.run()` on a `Device`. Replay the list (once or many times) by invoking the display list's `run()` function.

Method	Short Description
<code>run()</code>	(Re)-run a display list through a device.

Class API

`class DisplayList`

`fitz.DisplayList (self)`

Create a rendering device for a display list.

When the device is rendering a page it will populate the display list with drawing commands (text, images, etc.). The display list can later be reused to render a page many times without having to re-interpret the page from the document file.

Return type: `Device`

`run (self, dev, ctm, area)`

Parameters:

- `dev` (`Device`) -- Device obtained from `Device`
- `ctm` (`Matrix`) -- Transform matrix to apply to display list contents.
- `area` (`IRect`) -- Only the part of the contents of the display list visible within this area will be considered when the list is run through the device. This does not imply for tile objects contained in the display list.

Document

This class represents a document and is constructed by `fitz.Document(filename)`. This will also **open** the document specified as `filename`. Returns a `Document` object.

Method / Attribute	Short Description
<code>Document.authenticate()</code>	Decrypts the document
<code>Document.loadPage()</code>	Reads a page
<code>Document.save()</code>	Saves a copy of the document
<code>Document.ToC()</code>	Creates a table of contents
<code>Document.close()</code>	Closes the document
<code>Document.isClosed</code>	Has document been closed?
<code>Document.outline</code>	First <i>Outline</i> item
<code>Document.name</code>	filename of document
<code>Document.needsPass</code>	Is document is encrypted?
<code>Document.pageCount</code>	The document's number of pages
<code>Document.metadata</code>	The document's meta data

Class API

class Document

authenticate (password)

Decrypts the document with the string `password`. If successfull, the document's data can be accessed (e.g. for rendering).

Parameters: `password` (*string*) -- The password to be used.

Return type: `int`

Returns: `True` (1) if decryption with `password` was successfull, `False` (0) otherwise.

loadPage (number)

Loads a `Page` for further processing like rendering, text searching, etc. See the [Page](#) object.

Parameters: `number` (*int*) -- page number, zero-based (0 is the first page of the document).

Return type: [Page](#)

save (filename, garbage=0, clean=0, deflate=0, incremental=0, ascii=0, expand=0, linear=0)

Saves a copy of the document under `filename` (include path specifications as necessary). Internally the document may have changed. E.g. after a successfull `authenticate`, a decrypted copy will be saved, and, in addition (even without any of the optional parameters), some basic cleaning of the document data will also have occurred, e.g. broken xref tables will have been corrected as far as possible.

Parameters:

- **filename** (*string*) -- The filename to save to. Must be different from the original file name or else a `ValueError` will be raised.
- **garbage** (*int*) -- Do garbage collection: 0 = none, 1 = remove unused objects, 2 = in addition compact xref tables, 3 = in addition merge duplicate objects.
- **clean** (*int*) -- Clean content streams: 0 = False, 1 = True.
- **deflate** (*int*) -- Deflate uncompressed streams: 0 = False, 1 = True.
- **incremental** (*int*) -- Only save change objects: 0 = False, 1 = True.
- **ascii** (*int*) -- Where possible make the output ascii: 0 = False, 1 = True.
- **expand** (*int*) -- One byte bitfield to decompress content, 0 = none, 1 = images, 2 = fonts, 255 = all. This convenience option generates decompressed file versions that can be better read by some other programs.
- **linear** (*int*) -- Save a linearised version of the document: 0 = False, 1 = True. This option creates a file format for improved performance when read via internet connections.

Return type: `int`**Returns:** Count of errors occurred during save. Note: PyMuPDF will tolerate many errors encountered in input documents and continue processing.**ToC ()**

A convenience function that creates a table of contents from the `outline` entries. If none exist `[]` will be returned, otherwise a Python list `[[level, title, page], [...], ...]`. Note that the title entries have already been decoded to unicode here.

Return type: `list`**close ()**

Closes `filename` thus releasing control of it to the OS.

outline

Contains either `None` or the first [Outline](#) entry of the document. Can be used as a starting point to walk through all outline items.

Return type: [Outline](#)**isClosed**

`False` (0) if document is still open, `True` (1) otherwise. In the latter case, several attributes and all methods will have been deleted / disabled. In addition, [Page](#) objects created with `Document.loadPage()` will no longer be usable. For reference purposes, `Document.name` still exists and will contain the filename of the original document.

Return type: `int`**needsPass**

Contains an indicator showing whether the document is encrypted (`True` (1)) or not (`False` (0)).

Return type: `bool`**metadata**

Contains the document's meta data as a Python dictionary. Its keys are `format`, `encryption`, `title`, `author`, `subject`, `keywords`, `creator`, `producer`, `creationDate`, `modDate`.

For the most part, these key names in an obvious way correspond to the PDF's "official" meta data fields `/Creator`, `/Producer`, `/CreationDate`, `/ModDate`, `/Title`, `/Author`, `/Subject`, `/Keywords` respectively.

The value of `format` contains the version of the PDF format (e.g. 'PDF 1.4').

The value of `encryption` contains either `None` (not encrypted), or a string naming the encryption method used (e.g. 'Standard V4 R4 128-bit RC4'). Note that all other meta data values may be encrypted if the document is encrypted.

All item values are strings (or `None`), except for `keywords`.

If the value of `keywords` is not `None`, it contains a Python dictionary specifying the document's keywords as strings.

If the date fields contain meaningful data, they are strings in the PDF-internal timestamp format "D:<TS><TZ>", where

<TS> is the 12 character ISO timestamp `YYMMDDhhmmss` (`YYYY` - year, `MM` - month, `DD` - day, `hh` - hour, `mm` - minute, `ss` - second), and

<TZ> is a time zone value (time interval relative to GMT) containing a sign ('+' or '-'), the hour (`hh`), and the minute ('`mm`'), attention: enclose in apostrophies!).

For example, a Venezuelan value might look like `D:20150415131602-04'30'`, which corresponds to the timestamp April 15, 2015, at 1:16:02 pm local time Venezuela.

Return type: dict

name

Contains the `filename` value with which `Document` was created.

Return type: string

pageCount

Contains the number of pages of the document. May return 0 for documents with no pages.

Return type: int

Identity

Identity is just a *Matrix* that performs no action, to be used whenever the syntax requires a *Matrix*, but no actual transformation should take place.

Caution: Identity is a constant in the C code and therefore **readonly, do not try to modify** its properties in any way, i.e. you must not manipulate its [a,b,c,d,e,f], neither apply any method.

Matrix(1, 1) creates a matrix that acts like Identity, but it may be changed. Use this when you need a starting point for further modification, e.g. by one of the *Matrix* methods.

In other words:

```
# the following will not work - the interpreter will crash!
m = fitz.Identity.preRotate(90)

# do this instead:
m = fitz.Matrix(1, 1).preRotate(90)
```

IRect

`IRect` is a rectangular bounding box similar to `Rect`, except that all corner coordinates are integers. `IRect` is used to specify an area of pixels, e.g. to receive image data during rendering.

Attribute	Short Description
<code>IRect.width</code>	Width of the bounding box
<code>IRect.height</code>	Height of the bounding box
<code>IRect.x0</code>	X-coordinate of the top left corner
<code>IRect.y0</code>	Y-coordinate of the top left corner
<code>IRect.x1</code>	X-coordinate of the bottom right corner
<code>IRect.y1</code>	Y-coordinate of the bottom right corner

Class API

class `IRect`

`__init__` (*self*, *x0=0*, *y0=0*, *x1=0*, *y1=0*)

Constructor. The default values will create an empty rectangle. Function `Rect.round()` creates the smallest `IRect` containing `Rect`.

width

Contains the width of the bounding box. Equals $x1 - x0$.

Type: int

height

Contains the height of the bounding box. Equals $y1 - y0$.

Type: int

x0

X-coordinate of the top left corner.

Type: int

y0

Y-coordinate of the top left corner.

Type: int

x1

X-coordinate of the bottom right corner.

Type: int

y1

Y-coordinate of the bottom right corner.

Type: int

Link

Represents a pointer to somewhere (this document, other documents, the internet). Links exist per document page, and they are forward-chained to each other, starting from an initial link which is accessible by the `Page.loadLinks()` method.

Attribute	Short Description
<code>Link.rect</code>	Clickable area in untransformed coordinates.
<code>Link.dest</code>	Kind of link destination.
<code>Link.next</code>	Link to next link

Class API

`class Link`

rect

The area that can be clicked in untransformed coordinates.

Return type: [Rect](#)

dest

The link destination kind. An integer to be interpreted as one of the `FZ_LINK_*` values.

Return type: `int`

next

The next `Link` or `None`

Return type: [Link](#)

linkDest

Class representing the *dest* property of an outline entry.

Attribute	Short Description
<code>linkDest.dest</code>	Destination
<code>linkDest.fileSpec</code>	File specification (path, filename)
<code>linkDest.flags</code>	Descriptive flags
<code>linkDest.isMap</code>	Is this a MAP?
<code>linkDest.isUri</code>	Is this an URI?
<code>linkDest.kind</code>	Kind of destination
<code>linkDest.lt</code>	Top left coordinates
<code>linkDest.named</code>	Name if named destination
<code>linkDest.newWindow</code>	Name of new window
<code>linkDest.page</code>	Page number
<code>linkDest.rb</code>	Bottom right coordinates
<code>linkDest.uri</code>	URI

Class API

class `linkDest`

`dest`

Destination of `linkDest`.

Return type: [Link](#)

`fileSpec`

Contains the filename (including any path specifications) this link points to, if applicable.

Return type: `string`

`flags`

A one-byte bitfield consisting of indicators describing the validity and meaning of the different aspects of the destination. As far as possible, link destinations are constructed such that e.g. `linkDest.lt` and `linkDest.rb` can be treated as defining a bounding box, though the validity flags (see `LINK_FLAG_*` values) indicate which of the values were actually specified. Note that the numerical values for each of the `LINK_FLAGS` are powers of 2 and thus indicate the position of the bit to be tested. More than one bit can be `True`, so do not test for the value of the integer.

Return type: `int`

`isMap`

This flag specifies whether to track the mouse position when the URI is resolved. Default value: `False`.

Return type: `bool`

`isUri`

Specifies whether this destination is an internet resource.

Return type: `bool`

`kind`

Indicates the type of this destination, like a place in this document, a URI, a file launch, an action or a place in another file. Look at index entries `FZ_LINK_*` to see the names and numerical values.

Return type: `int`

lt

The top left *Point* of the destination.

Return type: *Point*

named

This destination refers to some named resource of the document (see Adobe PDF documentation).

Return type: int

newWindow

This destination refers to an action that will open a new window.

Return type: bool

page

The page number (in this document) this destination points to.

Return type: int

rb

The bottom right *Point* of this destination.

Return type: *Point*

uri

The name of the URI this destination points to.

Return type: string

Matrix

Matrix is a row-major 3x3 matrix used by image transformations in MuPDF. With matrices you can manipulate the rendered image of a page in a variety of ways: (parts of) the page can be rotated, zoomed, flipped, sheared and shifted by setting some or all of just six numerical values.

Since all points or pixels live in a two-dimensional space, one column vector of that matrix is a constant unit vector, and only the remaining six elements are used for manipulations. These six elements are usually represented by $[a, b, c, d, e, f]$. Here is how they are positioned in the matrix:

$$\begin{bmatrix} a & b & 0 \\ c & d & 0 \\ e & f & 1 \end{bmatrix}$$

It should be noted, that

- the below methods are just convenience functions - everything they do, can also be achieved by directly manipulating $[a, b, c, d, e, f]$
- all manipulations can be combined - you can construct a matrix that does a rotate **and** a shear **and** a scale **and** a shift etc. in one go

Method / Attribute	Description
<code>Matrix.__init__()</code>	Constructor.
<code>Matrix.preRotate()</code>	Perform a rotation
<code>Matrix.preScale()</code>	Perform a scaling
<code>Matrix.preShear()</code>	Perform a shearing
<code>Matrix.a</code>	Zoom factor X direction
<code>Matrix.b</code>	Shearing effect Y direction
<code>Matrix.c</code>	Shearing effect X direction
<code>Matrix.d</code>	Zoom factor Y direction
<code>Matrix.e</code>	Horizontal shift
<code>Matrix.f</code>	Vertical shift

Class API

`class Matrix`

`__init__(self, a=1, b=0, c=0, d=1, e=0, f=0)`

Constructor. `Matrix(1, 1)` will construct a modifiable version of the *Identity* matrix.

`preRotate(deg)`

Performs a clockwise rotation for positive `deg` degrees, else counterclockwise. This will change the matrix elements in the following way: $a = \cos(deg)$, $b = \sin(deg)$, $c = -\sin(deg)$, $d = \cos(deg)$. `e` and `f` will remain unchanged.

Parameters: `deg` -- The rotation angle [float] in degrees (use conventional notation based on $\pi = 180$ degrees).

Return type: *Matrix*

`preScale(sx, sy)`

Scales by the zoom factors `sx` and `sy`. Has effects on attributes `a` and `d` only.

Parameters:

- **sx** -- Zoom factor [float] in X direction. For the effect see description of attribute a.
- **sy** -- Zoom factor [float] in Y direction. For the effect see description of attribute d.

Return type: *Matrix***preShear (sx, sy)**

Performs shearing, i.e. transformation of rectangles into parallelograms (rhomboids). Has effects on attributes **b** and **c** only.

Parameters:

- **sx** -- Shearing effect [float] in X direction. See attribute **c**.
- **sy** -- Shearing effect [float] in Y direction. See attribute **b**.

Return type: *Matrix*

a
Scaling in X-direction (**width**). For example, a value of 0.5 performs a shrink of the **width** by a factor of 2. If $a < 0$, a (additional) vertical flip will occur, i.e. the rectangle's picture will be mirrored along the Y axis.

Type: float

b
Causes a shearing effect: each `Point(x, y)` will become `Point(x, y - b*x)`. Therefore, looking from left to right, e.g. horizontal lines will be "tilt" - downwards if $b > 0$, upwards otherwise (b is the tangens of the tilting angle).

Type: float

c
Causes a shearing effect: each `Point(x, y)` will become `Point(x - c*y, y)`. Therefore, looking upwards, vertical lines will be "tilt" - to the left if $c > 0$, to the right otherwise (c is the tangens of the tilting angle).

Type: float

d
Scaling in Y-direction (**height**). For example, a value of 1.5 performs a stretch of the **height** by 50%. If $d < 0$, a (additional) horizontal flip will occur, i.e. the rectangle's picture will be mirrored along the X axis.

Type: float

e
Causes a horizontal shift effect: Each `Point(x, y)` will be shifted right to become `Point(x + e, y)`. Note that negative values of e will shift left.

Type: float

f
Causes a vertical shift effect: Each `Point(x, y)` will be shifted down to become `Point(x, y - f)`. Note that negative values of f will shift up.

Type: float**Examples**

Here are examples to illustrate some of the effects achievable with matrices. The following pictures start with a page of this help file. We show what will happen when a matrix is being applied (though always full pages are created, only parts are displayed here to save space).

This is the original page image

Classes

Matrix

Matrix is a row-major 3x3 matrix used for representing transformations of coordinates throughout MuPDF.

Since all points or pixels reside in a two-dimensional space, one column vector of the matrix is the constant unit vector, and only the remaining six elements may vary. These six elements are usually represented by $[a, b, c, d, e, f]$. Here is how they are positioned in the matrix:

$$\begin{bmatrix} a & b & 0 \\ c & d & 0 \\ e & f & 1 \end{bmatrix}$$

It should be noted, that the below methods are just convenience functions. Each of them manipulates some of the six matrix elements in a specific way. By directly changing $[a, b, c, d, e, f]$, any of these functions can be replaced.

Shifting

We transform it with a matrix where $e = 100$ (right shift by 100 pixels)

Classes

Matrix is a row-major 3x3 matrix used for representing transformations of coordinates throughout MuPDF.

Since all points or pixels reside in a two-dimensional space, one column vector of the matrix is the constant unit vector, and only the remaining six elements may vary. These six elements are usually represented by $[a, b, c, d, e, f]$. Here is how they are positioned in the matrix:

$$\begin{bmatrix} a & b & 0 \\ c & d & 0 \\ e & f & 1 \end{bmatrix}$$

Next we do a down shift by 100 pixels: $f = 100$

Classes

Matrix

Matrix is a row-major 3x3 matrix used for representing transformations of coordinates throughout MuPDF.

Since all points or pixels reside in a two-dimensional space, one column vector of the matrix is the constant unit vector, and only the remaining six elements may vary. These six elements are usually represented by $[a, b, c, d, e, f]$. Here is how they are positioned in the matrix:

$$\begin{bmatrix} a & b & 0 \\ c & d & 0 \\ e & f & 1 \end{bmatrix}$$

Flipping

Flip the page vertically ($a = -1$)

Classes

Matrix

Matrix is a row-major 3x3 matrix used for representing transformations of coordinates throughout MuPDF. Since all points or pixels reside in a two-dimensional space, one column vector of the matrix is the constant unit vector, and only the remaining six elements may vary. These six elements are usually represented by $[a, b, c, d, e, f]$. Here is how they are positioned in the matrix:

$$\begin{bmatrix} a & b & 0 \\ c & d & 0 \\ e & f & 1 \end{bmatrix}$$

Flip horizontally ($d = -1$)

Classes

Matrix

Matrix is a row-major 3x3 matrix used for representing transformations of coordinates throughout MuPDF. Since all points or pixels reside in a two-dimensional space, one column vector of the matrix is the constant unit vector, and only the remaining six elements may vary. These six elements are usually represented by $[a, b, c, d, e, f]$. Here is how they are positioned in the matrix:

$$\begin{bmatrix} a & b & 0 \\ c & d & 0 \\ e & f & 1 \end{bmatrix}$$

Shearing

First a shear in Y direction ($b = 0.5$)

Classes

Matrix

Matrix is a row-major 3x3 matrix used for representing transformations of coordinates throughout MuPDF. Since all points or pixels reside in a two-dimensional space, one column vector of the matrix is the constant unit vector, and only the remaining six elements may vary. These six elements are usually represented by $[a, b, c, d, e, f]$. Here is how they are positioned in the matrix:

$$\begin{bmatrix} a & b & 0 \\ c & d & 0 \\ e & f & 1 \end{bmatrix}$$

It should be noted, that

- the below methods are just convenience functions. Even manipulating $[a, b, c, d, e, f]$
- all manipulations can be combined - you can even

Methods

Matrix `in`

Matrix `in`

Second a shear in X direction ($c = 0.5$)

Matrix

Matrix is a row-major 3x3 matrix used for image transformations in MuPDF. With matrices you can manipulate the rendered image of a page in a variety of ways: (parts of) pages can be rotated, zoomed, flipped, sheared and shifted by setting some or all of just six numerical values.


Since all points or pixels live in a two-dimensional space, one column vector of that matrix is a constant unit vector, and only the remaining six elements are used for manipulations. These six elements are usually represented by $[a, b, c, d, e, f]$. Here is how they are positioned in the matrix:

$$\begin{bmatrix} a & b & 0 \\ c & d & 0 \\ e & f & 1 \end{bmatrix}$$

It should be noted, that

Rotating

Finally a rotation by 60 degrees

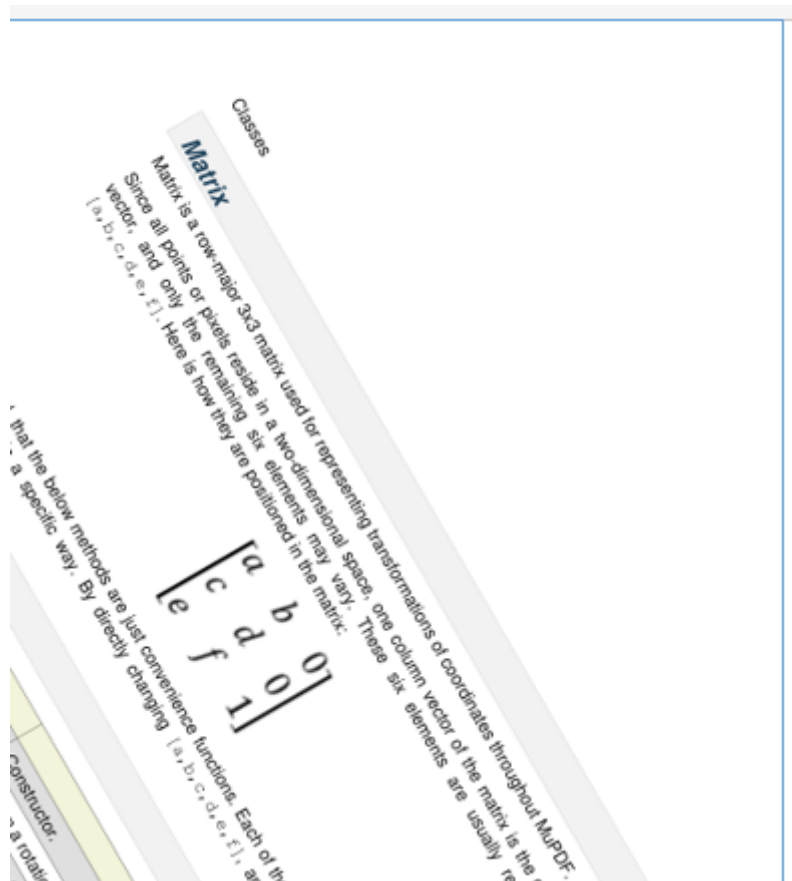

Outline

`outline` is a property of `Document`. If not `None`, it stands for the first outline item of the document. Its properties in turn define the characteristics of this item and also point to other outline items in either "horizontal" direction by property `.next` to the next item of same level, or downwards with property `.down` to the next item one level lower. The full tree of all outline items for e.g. a conventional table of contents can be recovered by following these "pointers".

Method / Attribute	Short Description
<code>Outline.down</code>	Next item downwards
<code>Outline.next</code>	Next item same level
<code>Outline.dest</code>	Link destination
<code>Outline.title</code>	Title (UTF-8 string)
<code>Outline.saveText()</code>	Prints a conventional table of contents to a file
<code>Outline.saveXML()</code>	Prints an XML-like table of contents to a file

Class API

class `Outline`

down

The next outline item on the next level down. Is `None` if the item has no children.

Return type: `Outline`

next

The next outline item at the same level as this item. Is `None` if the item is the last one in its level.

Return type: `Outline`

dest

The destination this entry points to. Can be a place in this or another document, or an internet resource. It can include actions to perform like opening a new window, invoking a javascript or opening another document.

Return type: `linkDest`

title

The item's title as a UTF-8 string.

Return type: `string`

saveText ()

The chain of outline items is being processed and printed to a file `filename` as a conventional table of contents.

Parameters: `filename` (*string*) -- Name of the file to write to.

saveXML ()

The chain of outline items is being processed and printed to a file `filename` as an XML-like table of contents.

Parameters: `filename` (*string*) -- Name of the file to write to.

Page

Page interface, created by `Document.loadPage()`.

Method / Attribute	Short Description
<code>Page.bound()</code>	The Page's rectangle
<code>Page.loadLinks()</code>	Get all the links in a page
<code>Page.run()</code>	Run a page through a device
<code>Page.number</code>	Page number

Class API

class Page

bound ()

Determine the a page's rectangle (before transformation).

Return type: *Rect*

loadLinks ()

Get all the links in a page.

Return type: list

Returns: A python list of *Link*. An empty list is returned if there's no link in the page.

run (dev, transform)

Run a page through a device.

Parameters:

- **dev** (*Device*) -- Device, obtained from one of the *Device* constructors.
- **transform** (*Matrix*) -- Transformation to apply to the page. May include for example scaling and rotation, see `Matrix.preScale()` and `Matrix.preRotate()`. Set it to *Identity* if no transformation is desired.

number

The page number

Return type: int

Pixmap

Pixmaps represent a set of pixels for a 2 dimensional region. Each pixel consists of *n* bytes ("components"), plus always an alpha. The data is in premultiplied alpha when rendering, but non-premultiplied for colorspace conversions and rescaling.

Method / Attribute	Short Description
<code>Pixmap.clearWith()</code>	Clears a pixmap (with given value)
<code>Pixmap.writePNG()</code>	Saves a pixmap as a png file
<code>Pixmap.invertIRect()</code>	Invert the pixels of a given bounding box
<code>Pixmap.samples</code>	The components data for all pixels
<code>Pixmap.h</code>	Height of the region in pixels
<code>Pixmap.w</code>	Width of the region in pixels
<code>Pixmap.x</code>	X-coordinate of top-left corner of pixmap
<code>Pixmap.y</code>	Y-coordinate of top-left corner of pixmap
<code>Pixmap.n</code>	Number of components per pixel
<code>Pixmap.xres</code>	Resolution in X-direction
<code>Pixmap.yres</code>	Resolution in Y-direction
<code>Pixmap.interpolate</code>	Interpolation method indicator

Class API

class Pixmap

clearWith (*self*, *value=0*)

Clears a pixmap.

Parameters: **value** (*int*) -- Values in the range 0 to 255 are valid. Each color byte of each pixel will be set to this value, while alpha will always be set to 255 (non-transparent). Default is 0.

samples

The color and transparency values for all pixels. Samples is a memory area of size `width * height * n` bytes. The first *n* bytes are components 0 to *n*-1 for the pixel at point (x,y). Each successive *n* bytes gives another pixel in scanline order. Subsequent scanlines follow each other with no padding. E.g. for an RGBA colorspace this means, `samples` is a bytearray like `..., R, G, B, A, ...`, and the four byte values R, G, B, A describe one pixel (RGBA is the only supported colorspace at this time).

Return type: bytearray

w

The width of the region in pixels.

Return type: int

h

The height of the region in pixels.

Return type: int

x

X-coordinate of top-left corner

Return type: int

y

Y-coordinate of top-left corner

Return type: int

n

Number of components per pixel. Will always be 4 because we always have an RGBA pixmap.

Return type: int

xres

Horizontal resolution in pixels per inch.

Return type: int

yres

Vertical resolution in pixels per inch

Return type: int

invertIRect (self, irect)

Invert all pixels in [IRect](#). All components except alpha are inverted.

Parameters: irect -- Invert all the pixels in the irect. If omitted, the whole pixmap will be inverted.

writePNG (self, filename, savealpha=False)

Save a pixmap as a png file.

Parameters:

- filename (string) -- The filename to save as (including extension).
- savealpha (bool) -- Save alpha or not.

interpolate

A boolean flag set to `True` if the image will be drawn using linear interpolation, or set to `False` if image is created using nearest neighbour sampling.

Return type: bool

Point

`Point` represents a point in the plane, defined by its x and y coordinates.

Attribute	Short Description
<code>Point.x</code>	The X-coordinate
<code>Point.y</code>	The Y-coordinate

Class API

`class Point`

```
__init__ (self, x=0, y=0)  
    Constructor, defaulting to "top left".
```

x
Type: float

y
Type: float

Rect

`Rect` represents a rectangle defined by its top left and its bottom right [Point](#) objects, in coordinates: ((x0, y0), (x1, y1)).

Rectangle borders are always in parallel with the respective X- and Y-axes. A rectangle is called "finite" if $x0 \leq x1$ and $y0 \leq y1$ is true, else "infinite".

Methods / Attributes	Short Description
<code>Rect.round()</code>	creates the smallest IRect containing <code>Rect</code>
<code>Rect.transform()</code>	transform <code>Rect</code> with a Matrix
<code>Rect.height</code>	<code>Rect</code> height
<code>Rect.width</code>	<code>Rect</code> width
<code>Rect.x0</code>	Top left corner's X-coordinate
<code>Rect.y0</code>	Top left corner's Y-coordinate
<code>Rect.x1</code>	Bottom right corner's X-coordinate
<code>Rect.y1</code>	Bottom right corner's Y-coordinate

Class API

`class Rect`

`__init__ (self, x0=0, y0=0, x1=0, y1=0)`

Constructor. The default values will create an empty rectangle.

`round ()`

Creates the smallest [IRect](#) that contains `Rect`.

Return type: [IRect](#)

`transform (m)`

Transforms `Rect` with a [Matrix](#).

Parameters: `m` -- A [Matrix](#) to be used for the transformation.

Return type: [Rect](#)

`width`

Contains the width of the rectangle. Equals $x1 - x0$.

Return type: float

`height`

Contains the height of the rectangle. Equals $y1 - y0$.

Return type: float

`x0`

X-coordinate of the top left corner.

Type: float

`y0`

Y-coordinate of the top left corner.

Type: float

`x1`

X-coordinate of the bottom right corner.

Classes

Type: float

y1

Y-coordinate of the bottom right corner.

Type: float

TextPage

`TextPage` represents the text of a page.

Method	Short Description
<code>TextPage.extractText()</code>	Extract the page's text.
<code>TextPage.search()</code>	Search for a string in the page.

Class API

class `TextPage`

`extractText()`

Extract the text from a `TextPage` object. Returns a UTF-8 encoded string of the page's complete text.

Return type: string

`search(string, maxhit)`

Search for the string `string`.

Parameters:

- **string** (*string*) -- The string to search for.
- **maxhit** (*int*) -- Maximum number of expected hits (default 16).

Return type: list

Returns: A python list. If not empty, each element of the list is an *IRect* (without transformation) surrounding a found `string` occurrence.

TextSheet

`TextSheet` contains a list of distinct text styles used on a page (or a series of pages).

Constants and Enumerations

Constants and enumerations of MuPDF as implemented by PyMuPDF. If your import statement was `import fitz` then each of the following variables `var` is accessible as `fitz.var`

Constants

Constant	Description
<code>CS_RGB</code>	1 - Type of <i>Colorspace</i> is RGBA
<code>VersionBind</code>	'1.7.0' - Version of PyMuPDF
<code>VersionFitz</code>	'1.7a' - Version of MuPDF

Enumerations

Possible values of `linkDest.kind` (link destination type). For details consult [Adobe PDF Reference sixth edition 1.7 November 2006](#).

Value	Description
<code>FZ_LINK_NONE</code>	0 - No destination
<code>FZ_LINK_GOTO</code>	1 - Points to a place in this document
<code>FZ_LINK_URI</code>	2 - Points to an URI
<code>FZ_LINK_LAUNCH</code>	3 - Launches (opens) a file
<code>FZ_LINK_NAMED</code>	4 - Performs some action
<code>FZ_LINK_GOTOR</code>	5 - Points to a place in another document

Possible values of `linkDest.flags` (link destination flags). **Attention:** The rightmost byte of this integer is a bit field. The values represent boolean indicators showing whether the associated statement is `True`.

Value	Description
<code>LINK_FLAG_L_VALID</code>	1 (bit 0) Top left x value is valid
<code>LINK_FLAG_T_VALID</code>	2 (bit 1) Top left y value is valid
<code>LINK_FLAG_R_VALID</code>	4 (bit 2) Bottom right x value is valid
<code>LINK_FLAG_B_VALID</code>	8 (bit 3) Bottom right y value is valid
<code>LINK_FLAG_FIT_H</code>	16 (bit 4) Horizontal fit
<code>LINK_FLAG_FIT_V</code>	32 (bit 5) Vertical fit
<code>LINK_FLAG_R_IS_ZOOM</code>	64 (bit 6) Bottom right x is a zoom figure

Index

`__init__()` (Colorspace method)
(Device method) [1]
(IRect method)
(Matrix method)
(Point method)
(Rect method)

A

`a` (Matrix attribute)
`authenticate()` (Document method)
`author` (built-in variable)

B

`b` (Matrix attribute)
`bound()` (Page method)

C

`c` (Matrix attribute)
`clearWith()` (Pixmap method)
`close()` (Document method)
Colorspace (built-in class)
`colorspace` (Colorspace attribute)
`creationDate` (built-in variable)
`creator` (built-in variable)
`CS_RGB` (built-in variable)

D

`d` (Matrix attribute)
`dest` (Link attribute)
(Outline attribute)
(linkDest attribute)
Device (built-in class)
DisplayList (built-in class)
`DisplayList()` (DisplayList.fitz method)
Document (built-in class)
`down` (Outline attribute)

E

`e` (Matrix attribute)
`encryption` (built-in variable)

`extractText()` (TextPage method)

F

`f` (Matrix attribute)
`fileSpec` (linkDest attribute)
`flags` (linkDest attribute)
`format` (built-in variable)
`FZ_LINK_GOTO` (built-in variable)
`FZ_LINK_GOTOR` (built-in variable)
`FZ_LINK_LAUNCH` (built-in variable)
`FZ_LINK_NAMED` (built-in variable)
`FZ_LINK_NONE` (built-in variable)
`FZ_LINK_URI` (built-in variable)

H

`h` (Pixmap attribute)
`height` (IRect attribute)
(Rect attribute)

I

`interpolate` (Pixmap attribute)
`invertIRect()` (Pixmap method)
IRect (built-in class)
`irect` (Colorspace attribute)
`isClosed` (Document attribute)
`isMap` (linkDest attribute)
`isUri` (linkDest attribute)

K

`keywords` (built-in variable)
`kind` (linkDest attribute)

L

Link (built-in class)
`LINK_FLAG_B_VALID` (built-in variable)
`LINK_FLAG_FIT_H` (built-in variable)
`LINK_FLAG_FIT_V` (built-in variable)
`LINK_FLAG_L_VALID` (built-in variable)
`LINK_FLAG_R_IS_ZOOM` (built-in variable)
`LINK_FLAG_R_VALID` (built-in variable)
`LINK_FLAG_T_VALID` (built-in variable)
`linkDest` (built-in class)
`loadLinks()` (Page method)

loadPage() (Document method)

lt (linkDest attribute)

M

Matrix (built-in class)

metadata (Document attribute)

modDate (built-in variable)

N

n (Pixmap attribute)

name (Document attribute)

named (linkDest attribute)

needsPass (Document attribute)

newWindow (linkDest attribute)

next (Link attribute)

(Outline attribute)

number (Page attribute)

O

object (Device attribute)

Outline (built-in class)

outline (Document attribute)

P

Page (built-in class)

page (linkDest attribute)

pageCount (Document attribute)

Pixmap (built-in class)

Point (built-in class)

preRotate() (Matrix method)

preScale() (Matrix method)

preShear() (Matrix method)

producer (built-in variable)

R

rb (linkDest attribute)

Rect (built-in class)

rect (Link attribute)

round() (Rect method)

run() (DisplayList method)

(Page method)

S

samples (Pixmap attribute)

save() (Document method)

saveText() (Outline method)

saveXML() (Outline method)

search() (TextPage method)

subject (built-in variable)

T

TextPage (built-in class)

textpage (Device attribute)

textsheet (Device attribute)

title (built-in variable)

(Outline attribute)

ToC() (Document method)

transform (Rect attribute)

U

uri (linkDest attribute)

V

VersionBind (built-in variable)

VersionFitz (built-in variable)

W

w (Pixmap attribute)

width (IRect attribute)

(Rect attribute)

writePNG() (Pixmap method)

X

x (Pixmap attribute)

(Point attribute)

x0 (IRect attribute)

(Rect attribute)

x1 (IRect attribute)

(Rect attribute)

xres (Pixmap attribute)

Y

y (Pixmap attribute)

(Point attribute)

y0 (IRect attribute)

(Rect attribute)

y1 (IRect attribute)

(Rect attribute)

yres (Pixmap attribute)