
Experiment 10: Install and Explore Selenium for Automated Testing.


Install NetBeans IDE 21 and JDK 17


Install Jar Files From The Selenium Downloads

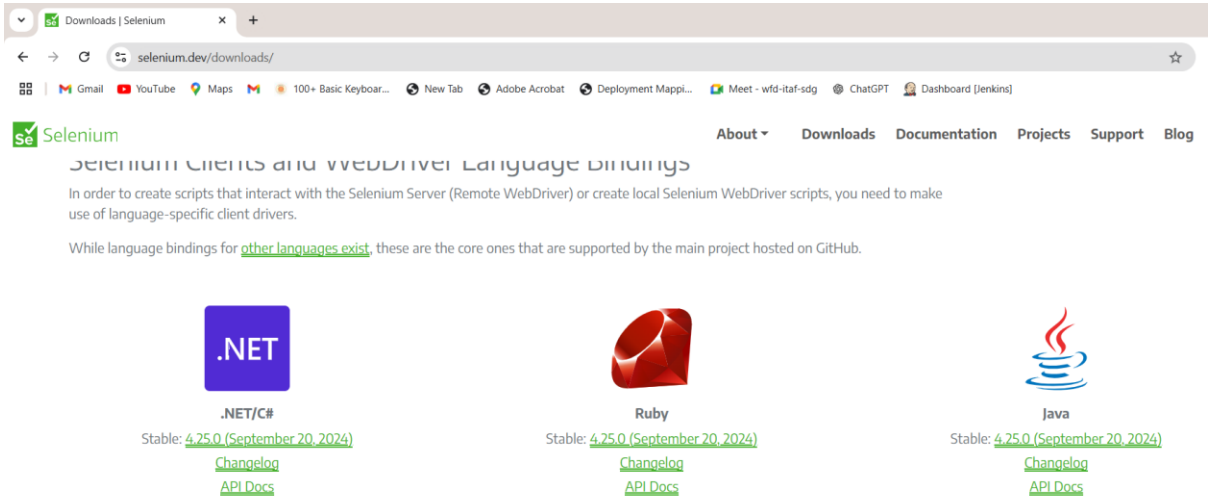


Unzip Into Your Working Directory

Open NetBeans Go to the File>New Project

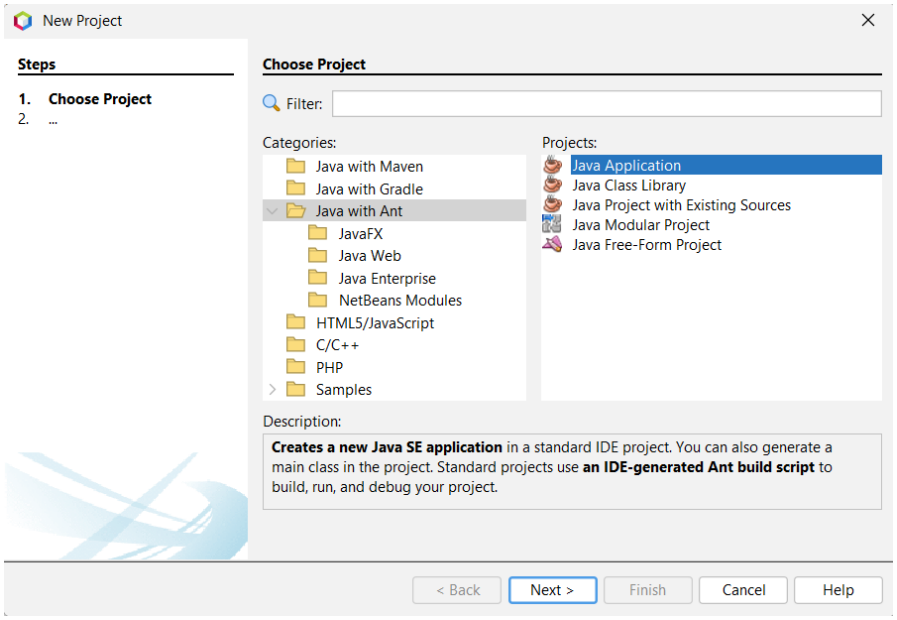

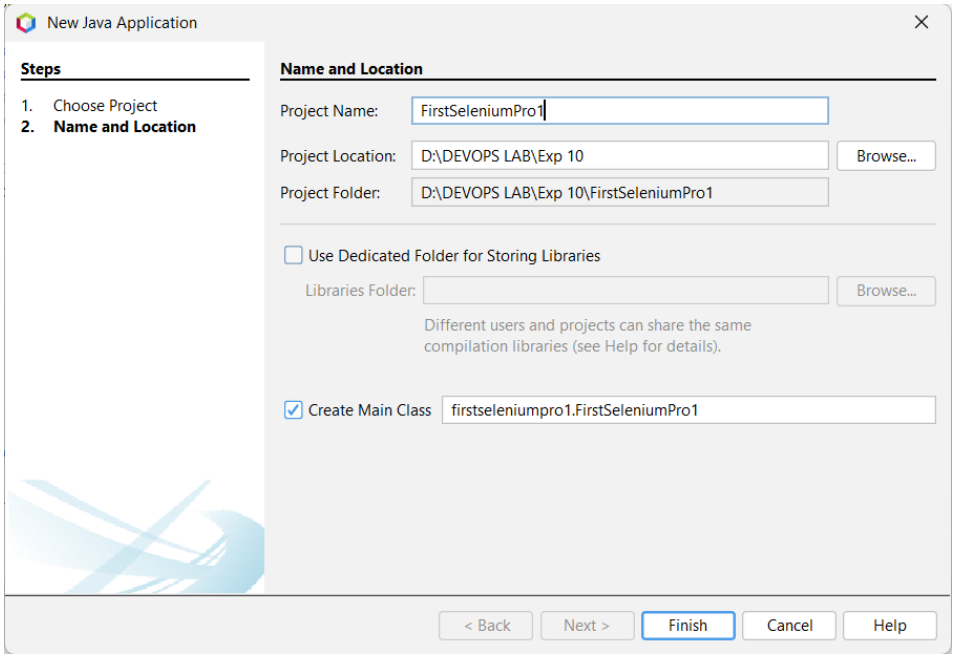



Give The File Name & Click On Finish.

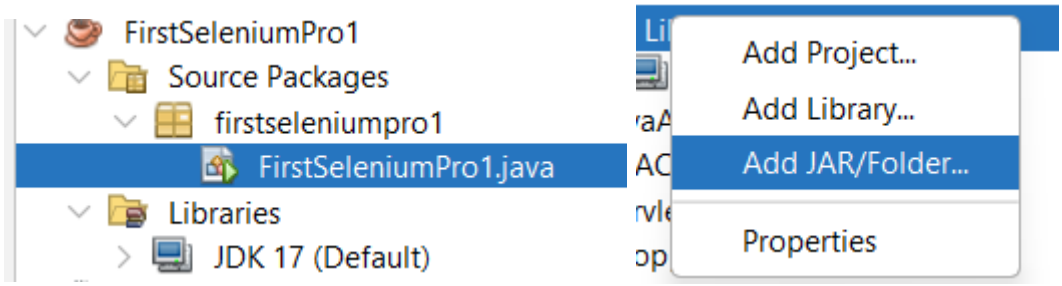


Right Click on the Libraries And Click on Add JAR/Folder

Add all the Jar Files Of Selenium By Pressing CTRL+A

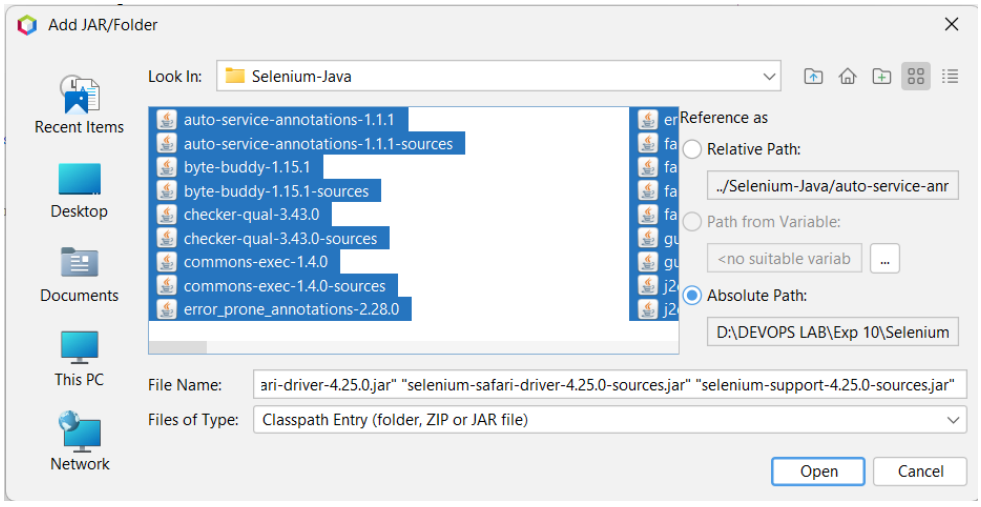

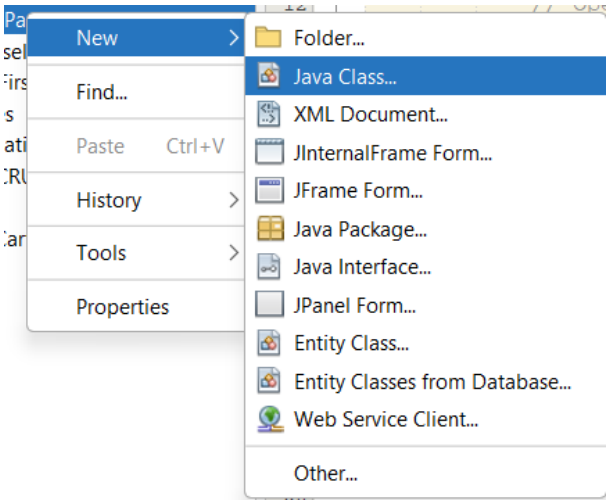
New
Find...
Paste Ctrl+V
History
Tools
Properties
Folder...
Java Class...
XML Document...
JInternalFrame Form...
JFrame Form...
Java Package...
Java Interface...
JPanel Form...
Entity Class...
Entity Classes from Database...
Web Service Client...
Other...

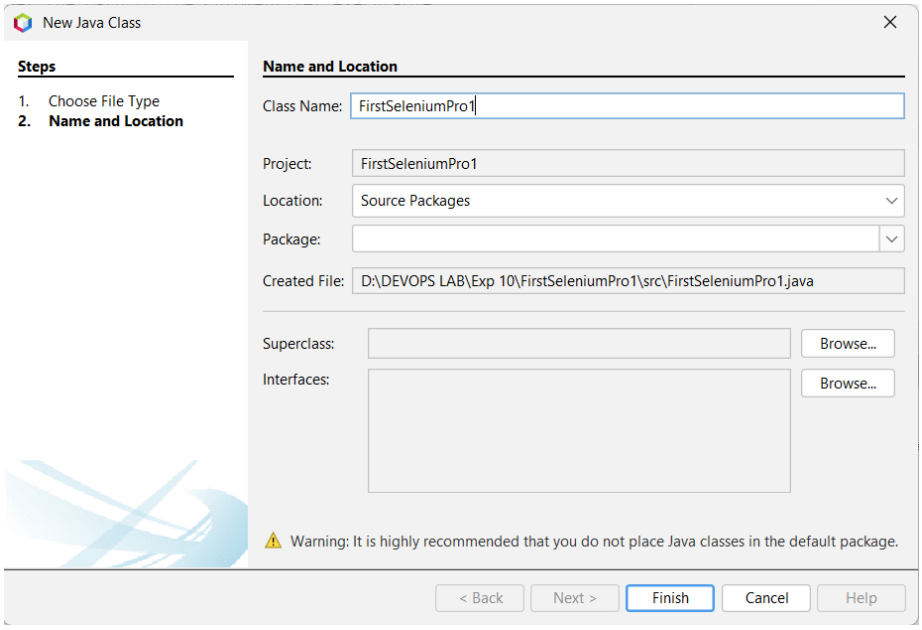
New Java Class
Steps
1. Choose File Type
2. Name and Location
Name and Location
Class Name: FirstSeleniumPro1
Project: FirstSeleniumPro1
Location: Source Packages
Package:
Created File: D:\DEVOPS LAB\Exp 10\FirstSeleniumPro1\src\FirstSeleniumPro1.java
Superclass:
Browse...
Interfaces:
Browse...
Warning: It is highly recommended that you do not place Java classes in the default package.
< Back
Next >
Finish
Cancel
Help

FirstSeleniumPro1.java


```
import org.openqa.selenium.WebDriver;
import org.openqa.selenium.edge.EdgeDriver;


public class FirstSeleniumPro {
    public static void main(String[] args) {
        // Set the path to the ChromeDriver executable
       // System.setProperty("webdriver.chrome.driver", "D:\\DEVOPS
LAB\\WebDrivers\\msgedgedriver.exe");
        // Initialize ChromeDriver
        WebDriver driver = new EdgeDriver();


        try {
            // Open a website
            driver.get("https://www.google.com");


            // Print the title of the page
            System.out.println("Title: " + driver.getTitle());


            // Wait for 60 seconds
            Thread.sleep(60000);
        } catch (Exception e) {
            System.out.println("Error: " + e.getMessage());
        } finally {
            // Close the browser
            driver.quit();
        }
    }
}
```

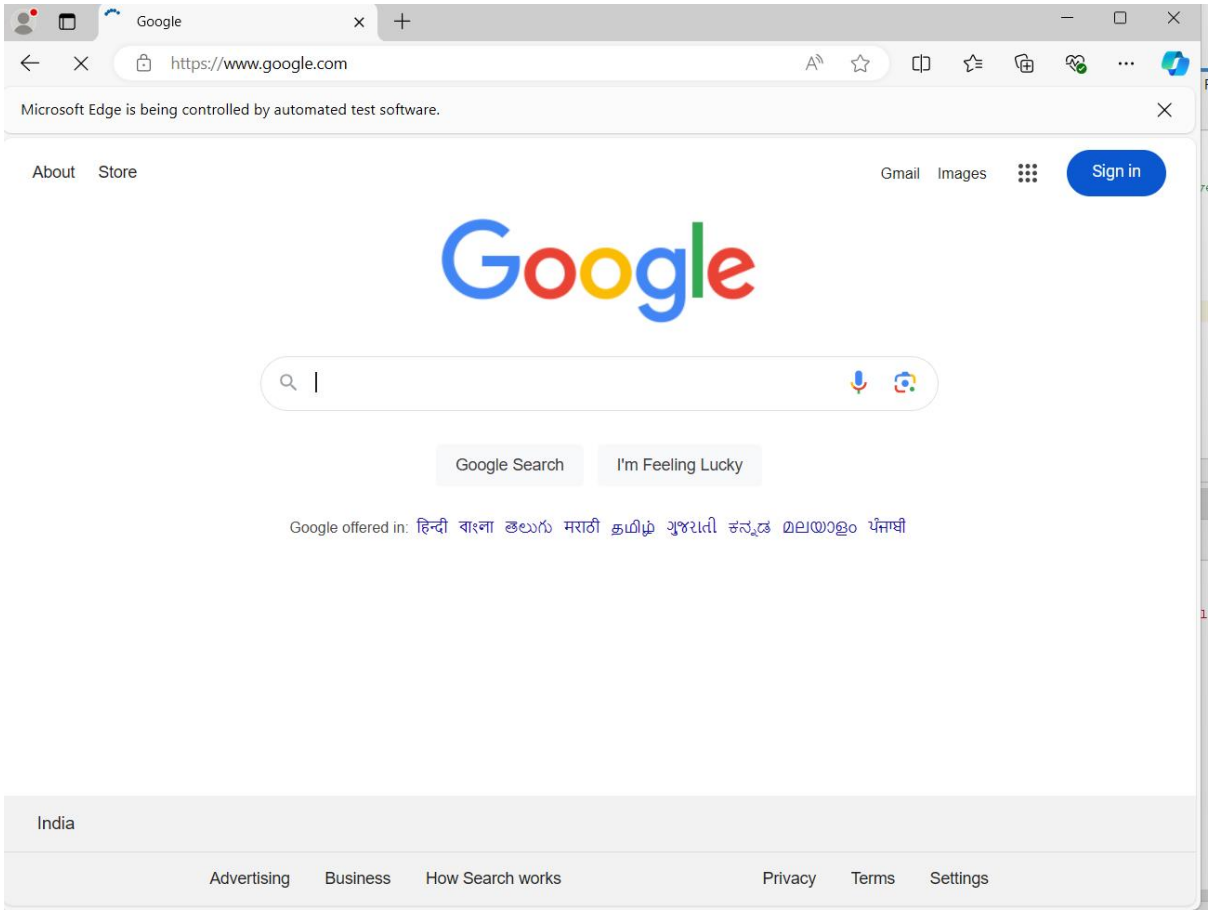



```
import org.openqa.selenium.WebDriver;
import org.openqa.selenium.edge.EdgeDriver;

public class FirstSeleniumPro1 {
    public static void main(String[] args) {
        // Set the path to the ChromeDriver executable
        //System.setProperty("webdriver.chrome.driver", "D:\\DEVOPS LAB\\WebDrivers\\msgedgedriver.exe");
        // Initialize ChromeDriver
        WebDriver driver = new EdgeDriver();

        try {
            // Open a website
            driver.get("D:\\DEVOPS LAB\\EventRegistrationForm.html");
```

```
            // Print the title of the page
            System.out.println("Title: " + driver.getTitle());

            // Wait for 60 seconds
            Thread.sleep(60000);
        } catch (Exception e) {
            System.out.println("Error: " + e.getMessage());
        } finally {
            // Close the browser
            driver.quit();
        }
    }
}
```

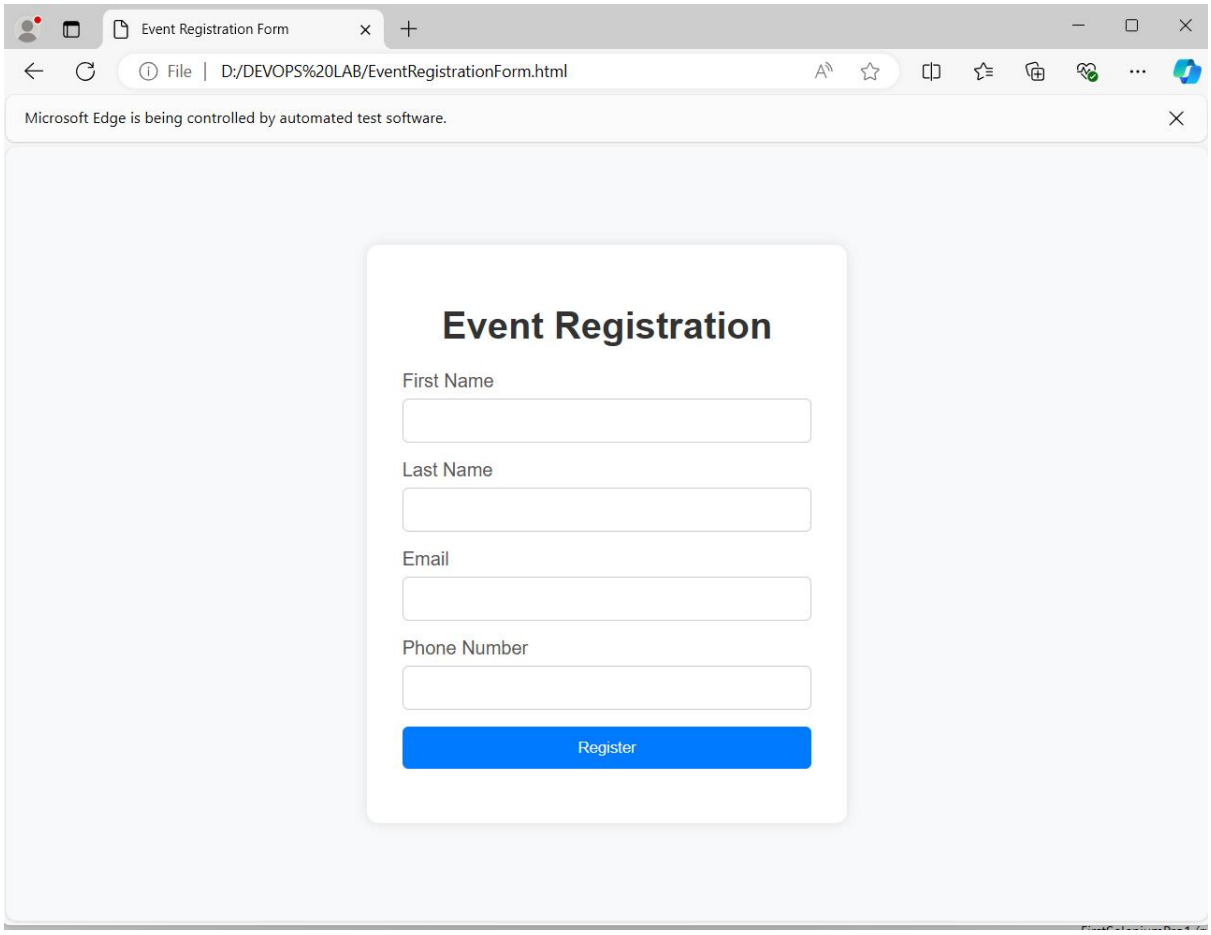

EXPERIMENT 11: Write a simple program in JavaScript and perform testing using Selenium.

JavaScriptCalculator.html

```
<!DOCTYPE html>
<html>
<head>
  <title>Simple Calculator</title>
  <style>
    body {
      font-family: Arial, sans-serif;
      background-color: #f4f4f4;
      display: flex;
      justify-content: center;
      align-items: center;
      height: 100vh;
      margin: 0;
    }
    .calculator {
      background-color: #fff;
      padding: 20px;
      border-radius: 10px;
      box-shadow: 0 0 10px rgba(0, 0, 0, 0.1);
    }
    .calculator input[type="text"] {
      width: 100%;
      height: 50px;
      font-size: 1.2em;
      text-align: right;
      margin-bottom: 10px;
      border: none;
```

```
    border-radius: 5px;
    box-shadow: inset 0 0 5px rgba(0, 0, 0, 0.1);
    padding-right: 10px;
}
.calculator button {
    width: 22%;
    height: 50px;
    font-size: 1.2em;
    margin: 2px;
    border: none;
    border-radius: 5px;
    background-color: #f2f2f2;
    cursor: pointer;
    transition: background-color 0.2s;
}
.calculator button:hover {
    background-color: #ddd;
}
.calculator button.operator {
    background-color: #d4edda;
}
.calculator button.operator:hover {
    background-color: #c3e6cb;
}
.calculator button.equals {
    background-color: #76c7c0;
    width: 48%;
    color: #fff;
}
.calculator button.equals:hover {
```

```
            background-color: #63b0b8;
        }
        .calculator button.zero {
            width: 48%;
        }
    </style>
</head>
<body>
    <div class="calculator">
        <input type="text" id="display" readonly>
        <br>
        <button onclick="clearDisplay()">C</button>
        <button onclick="deleteLast()">←</button>
        <button class="operator" onclick="appendToDisplay('/')">/</button>
        <button class="operator" onclick="appendToDisplay('*')">*</button>
        <br>
        <button onclick="appendToDisplay('7')">7</button>
        <button onclick="appendToDisplay('8')">8</button>
        <button onclick="appendToDisplay('9')">9</button>
        <button class="operator" onclick="appendToDisplay('-')">-</button>
        <br>
        <button onclick="appendToDisplay('4')">4</button>
        <button onclick="appendToDisplay('5')">5</button>
        <button onclick="appendToDisplay('6')">6</button>
        <button class="operator" onclick="appendToDisplay('+')">+</button>
        <br>
        <button onclick="appendToDisplay('1')">1</button>
        <button onclick="appendToDisplay('2')">2</button>
        <button onclick="appendToDisplay('3')">3</button>
        <button class="equals" onclick="calculateResult()">=</button>
```

```
        <br>
        <button class="zero" onclick="appendToDisplay('0')">0</button>
        <button onclick="appendToDisplay('.')">.</button>
    </div>

    <script>
        function clearDisplay() {
            document.getElementById('display').value = '';
        }

        function deleteLast() {
            var display = document.getElementById('display').value;
            document.getElementById('display').value = display.substring(0, display.length - 1);
        }

        function appendToDisplay(value) {
            document.getElementById('display').value += value;
        }

        function calculateResult() {
            var display = document.getElementById('display').value;
            try {
                document.getElementById('display').value = eval(display);
            } catch (e) {
                document.getElementById('display').value = 'Error';
            }
        }
    </script>
</body>
</html>
```

Java Code

```
import org.openqa.selenium.WebDriver;
import org.openqa.selenium.edge.EdgeDriver;



public class FirstSeleniumPro {
    public static void main(String[] args) {
        // Set the path to the ChromeDriver executable
        //System.setProperty("webdriver.chrome.driver", "D:\\DEVOPS
LAB\\WebDrivers\\msgedgedriver.exe");


        // Initialize ChromeDriver
        WebDriver driver = new EdgeDriver();


        try {
            // Open a website
            driver.get("D:\\DEVOPS LAB\\JavaScriptCalculator.html");


            // Print the title of the page
            System.out.println("Title: " + driver.getTitle());


            // Wait for 60 seconds
            Thread.sleep(60000);
        } catch (Exception e) {
            System.out.println("Error: " + e.getMessage());
        } finally {
            // Close the browser
            driver.quit();
        }
    }
}
```

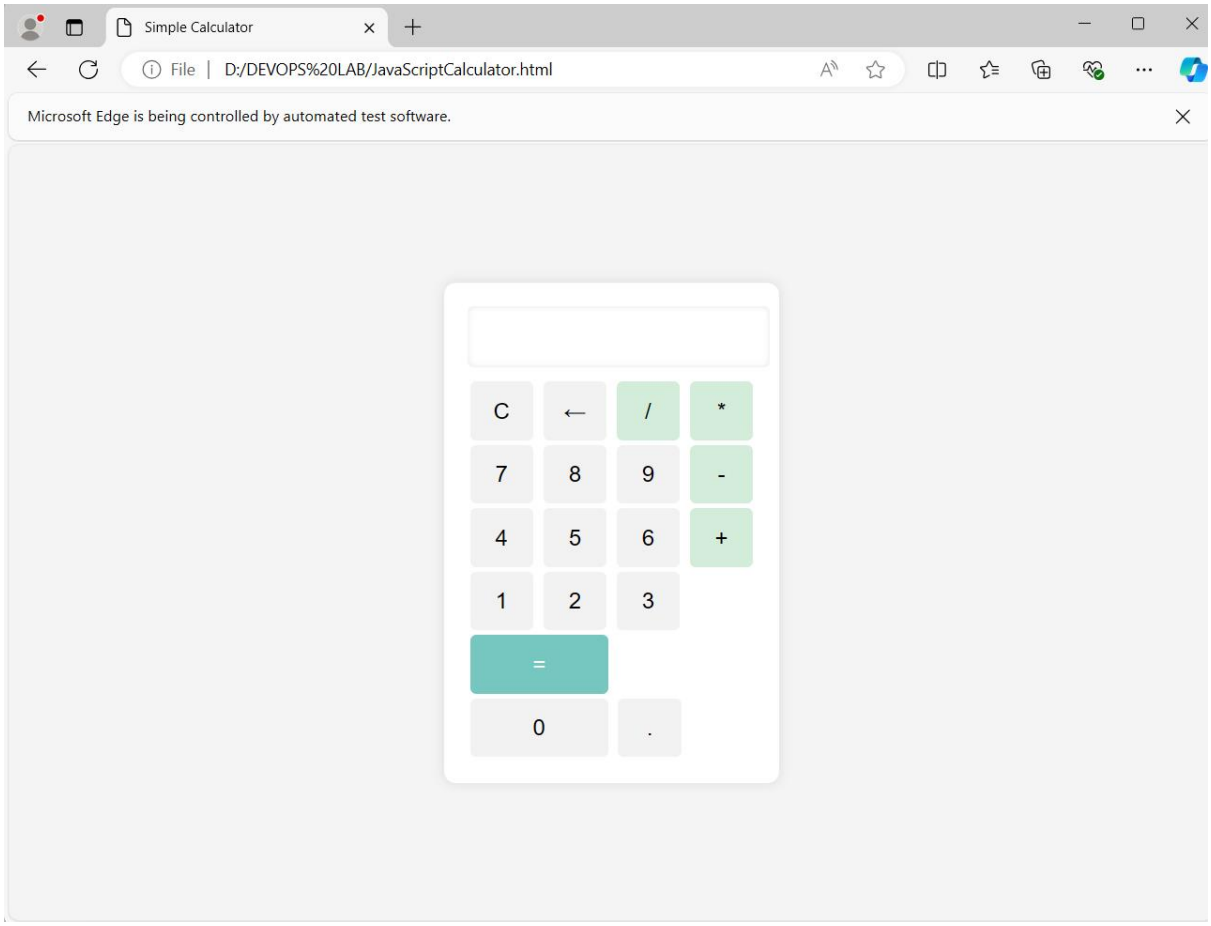
Simple Calculator
File | D:/DEVOPS%20LAB/JavaScriptCalculator.html
Microsoft Edge is being controlled by automated test software.
C
←
/
*
7
8
9
-
4
5
6
+
1
2
3
=
0
.