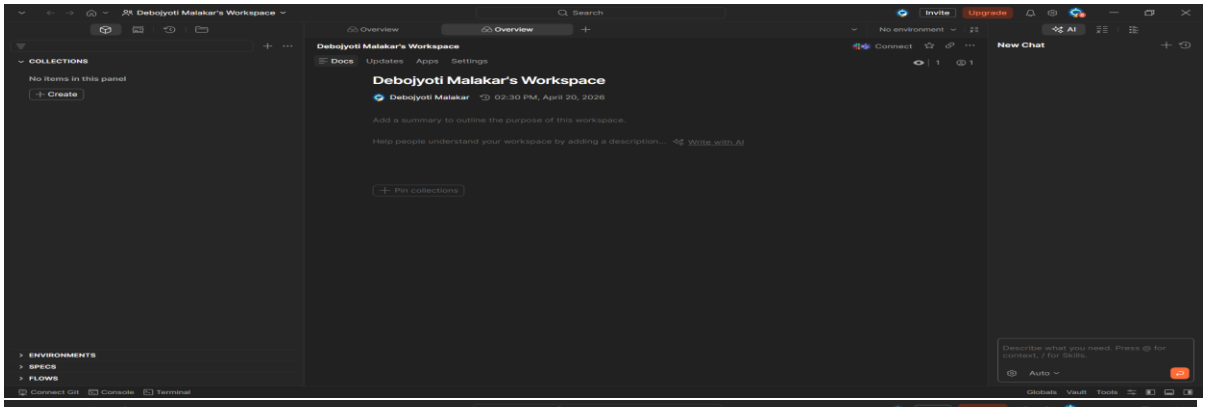

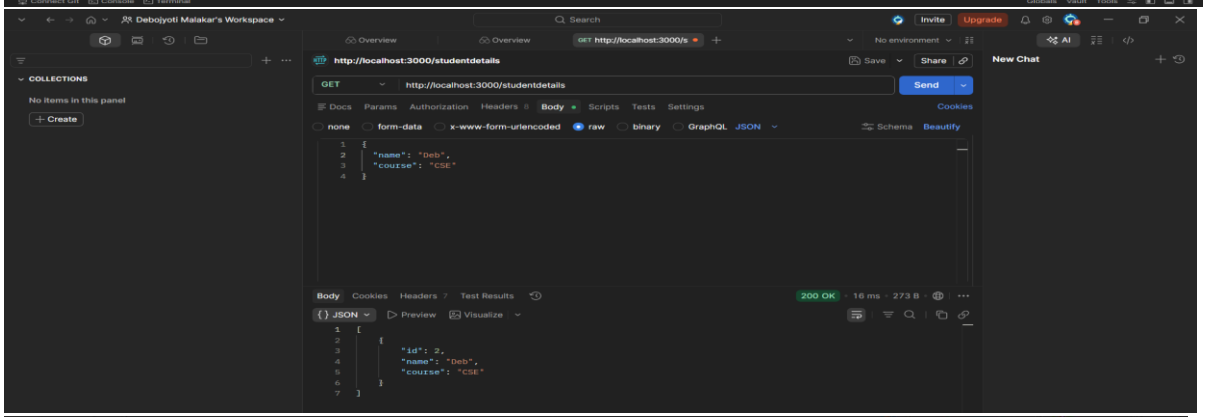

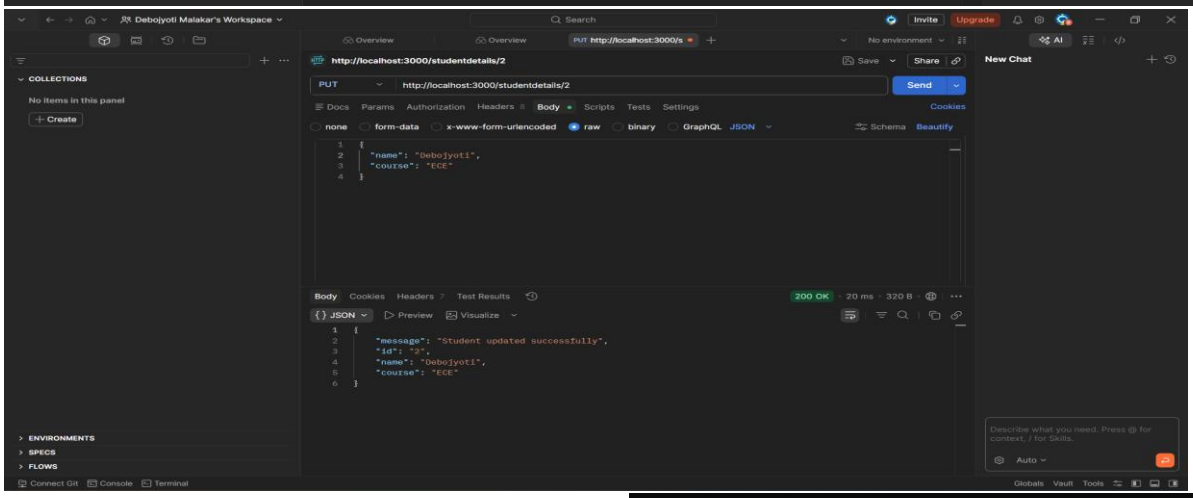


```
mysql> select * from studentdetails;
+----+-----------+--------+
| id | name      | course |
+----+-----------+--------+
|  2 | Debojyoti | ECE    |
+----+-----------+--------+
1 row in set (0.03 sec)
```

```
mysql> create database collegedb5L9;
Query OK, 1 row affected (0.16 sec)

mysql> use collegedb5L9;
Database changed
mysql> create table studentdetails(id int AUTO_INCREMENT primary key, name varchar(100) not null, course varchar(100) no
t null);
Query OK, 0 rows affected (0.25 sec)
```

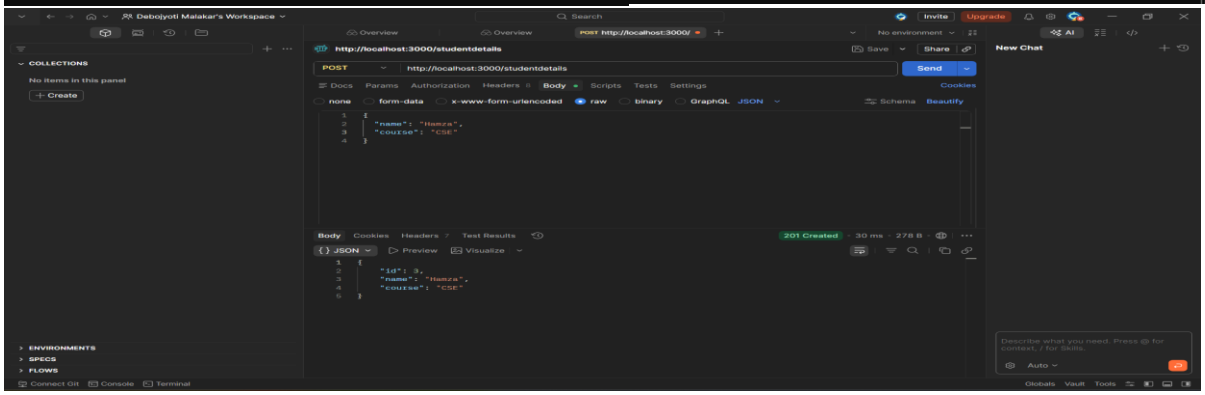

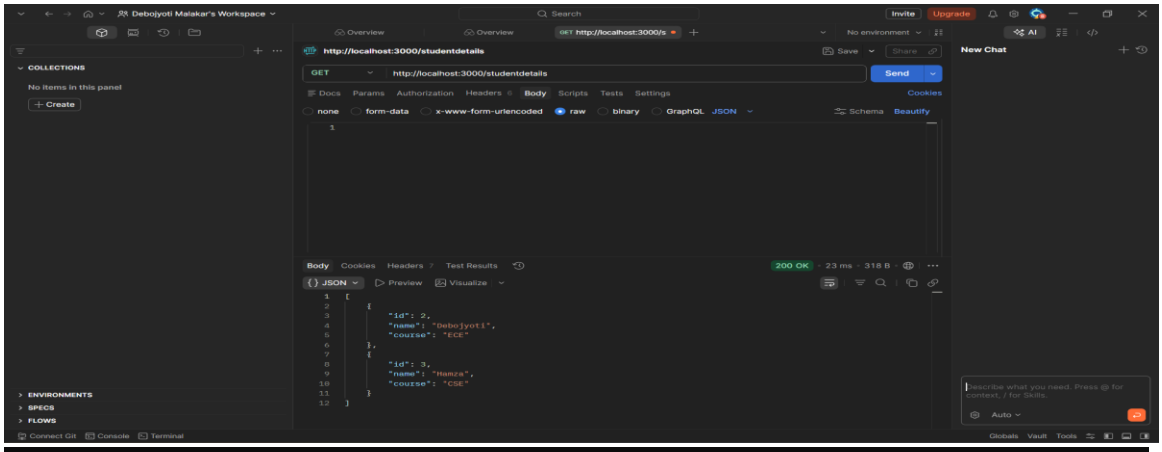


```
mysql> select * from studentdetails;
+----+-----------+--------+
| id | name      | course |
+----+-----------+--------+
|  2 | Debojyoti | ECE    |
|  3 | Hamza     | CSE    |
+----+-----------+--------+
2 rows in set (0.00 sec)
```

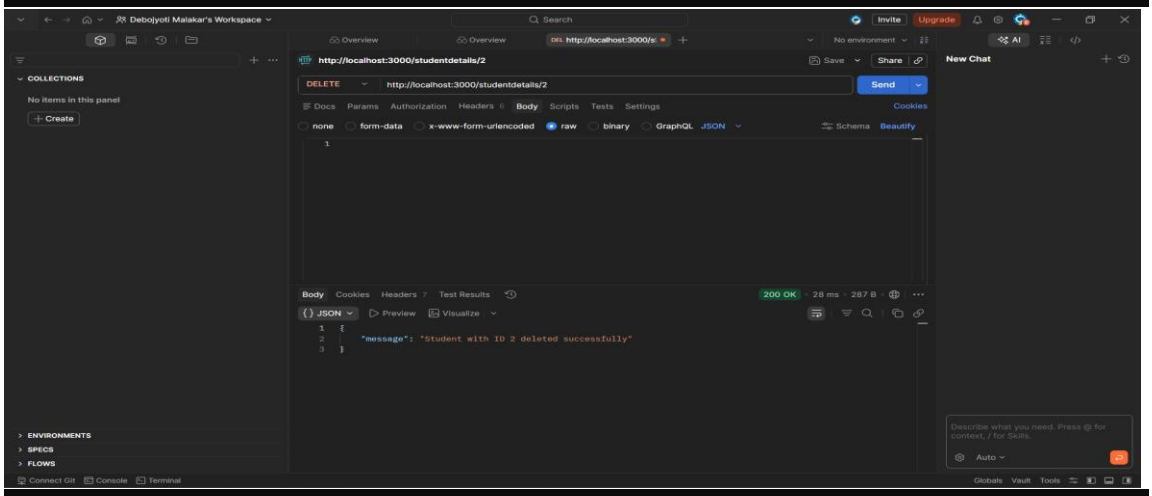


```
mysql> select * from studentdetails;
+----+-----------+--------+
| id | name      | course |
+----+-----------+--------+
|  2 | Debojyoti | ECE    |
+----+-----------+--------+
1 row in set (0.03 sec)

mysql> select * from studentdetails;
+----+-----------+--------+
| id | name      | course |
+----+-----------+--------+
|  2 | Debojyoti | ECE    |
|  3 | Hamza     | CSE    |
+----+-----------+--------+
2 rows in set (0.00 sec)

mysql> select * from studentdetails;
+----+-------+--------+
| id | name  | course |
+----+-------+--------+
|  3 | Hamza | CSE    |
+----+-------+--------+
1 row in set (0.00 sec)
```

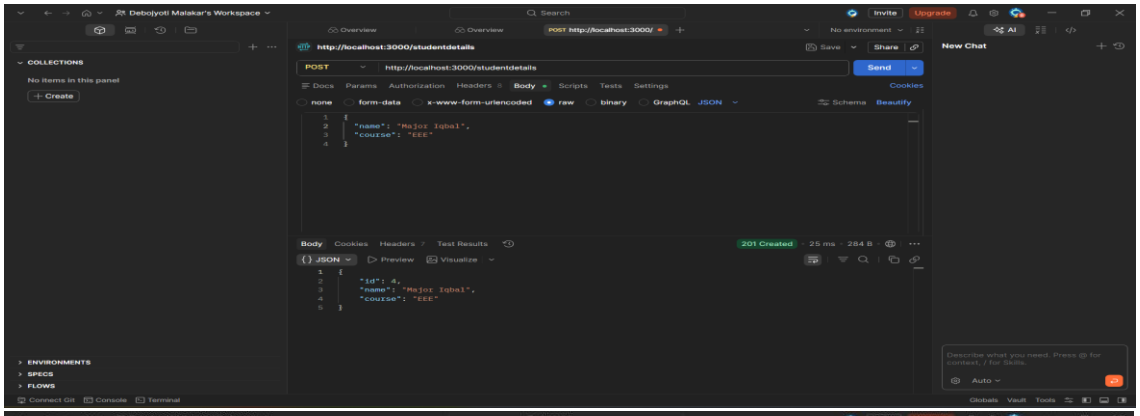

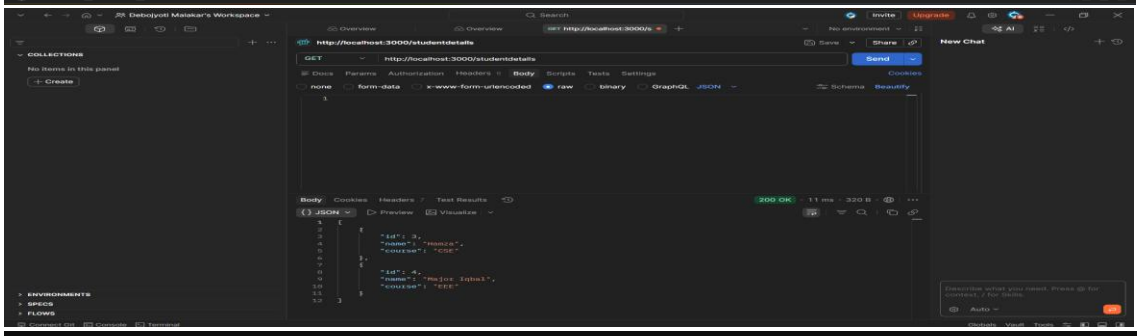


```
mysql> select * from studentdetails;
+----+-----------+--------+
| id | name      | course |
+----+-----------+--------+
|  2 | Debojyoti | ECE    |
|  3 | Hamza     | CSE    |
+----+-----------+--------+
2 rows in set (0.00 sec)

mysql> select * from studentdetails;
+----+-------+--------+
| id | name  | course |
+----+-------+--------+
|  3 | Hamza | CSE    |
+----+-------+--------+
1 row in set (0.00 sec)

mysql> select * from studentdetails;
+----+-------------+--------+
| id | name        | course |
+----+-------------+--------+
|  3 | Hamza       | CSE    |
|  4 | Major Iqbal | EEE    |
+----+-------------+--------+
2 rows in set (0.00 sec)
```