

Network Programming:

A Programmer's View of the Internet:

3. Internet Connections (TCP)

Internet Connections (TCP)


- Clients and servers communicate by sending streams of bytes over **connections**. Each connection is:
 - *Point-to-point*: connects a pair of processes.
 - *Full-duplex*: data can flow in both directions at the same time,
 - *Reliable*: stream of bytes sent by the source is eventually received by the destination in the same order it was sent.
- A **socket** is an endpoint of a connection
 - *Socket address* is an `IPAddress:port` pair
- A **port** is a 16-bit integer that identifies a process:
 - **Ephemeral port**: Assigned automatically by client kernel when client makes a connection request.
 - **Well-known port**: Associated with some **service** provided by a server (e.g., port 80 is associated with Web servers)

Well-known Ports and Service Names

- Popular services have permanently assigned ***well-known ports and corresponding well-known service names:***
 - echo server: 7/echo
 - ssh servers: 22/ssh
 - email server: 25/smtp
 - Web servers: 80/http, 443/https
- Mappings between well-known ports and service names is contained in the file `/etc/services` on each Linux machine.

Anatomy of a Connection


- A connection is uniquely identified by the socket addresses of its endpoints (*socket pair*)
 - (cliaddr:cliport, servaddr:servport)

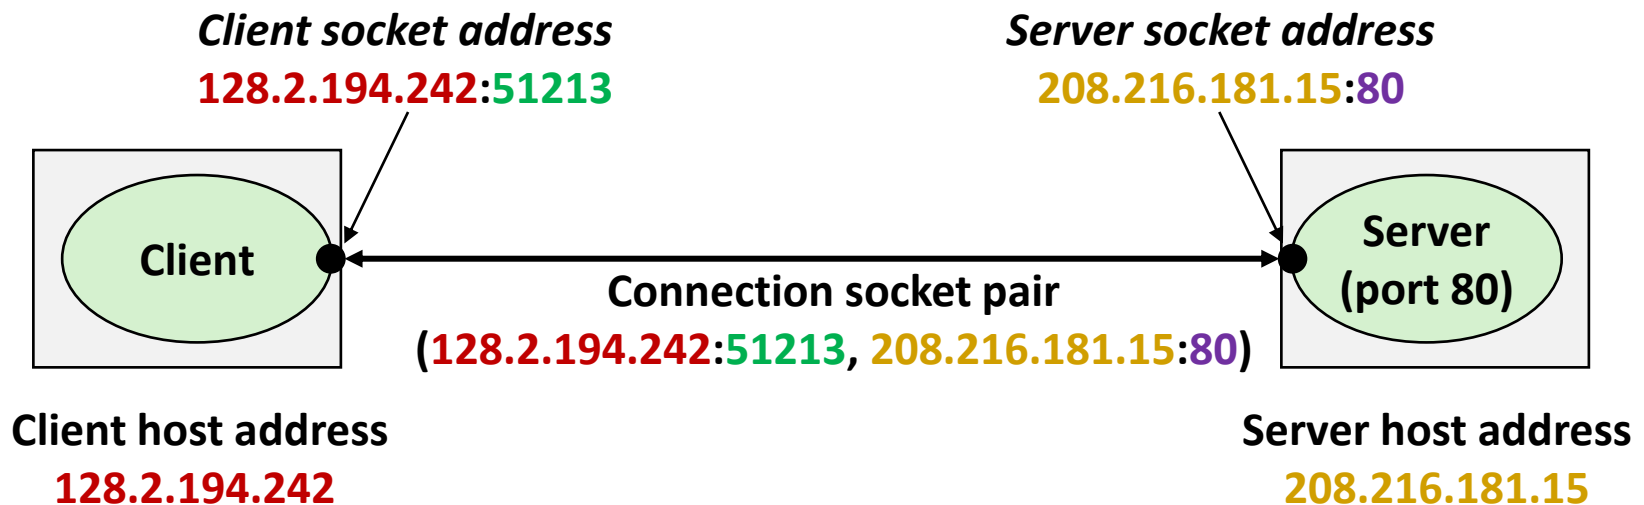

51213 is an ephemeral port
randomly allocated by the kernel

80 is a well-known port
associated with Web servers

Using Ports to Identify Services

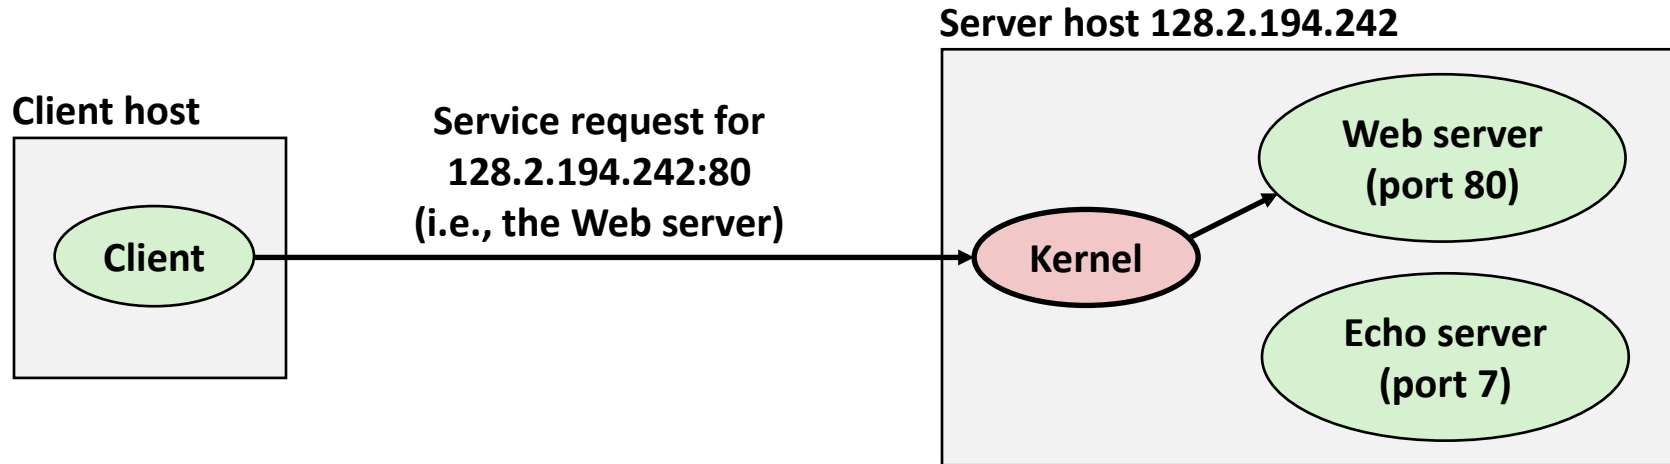

Using Ports to Identify Services

