

Linking: *Concepts*

Example C Program

```
int sum(int *a, int n);

int array[2] = {1, 2};

int main()
{
    int val = sum(array, 2);
    return val;
}
```

main.c

```
int sum(int *a, int n)
{
    int i, s = 0;


    for (i = 0; i < n; i++) {
        s += a[i];
    }
    return s;
}
```

sum.c

Static Linking

- Programs are translated and linked using a *compiler driver*:


- `linux> gcc -Og -o prog main.c sum.c`
- `linux> ./prog`

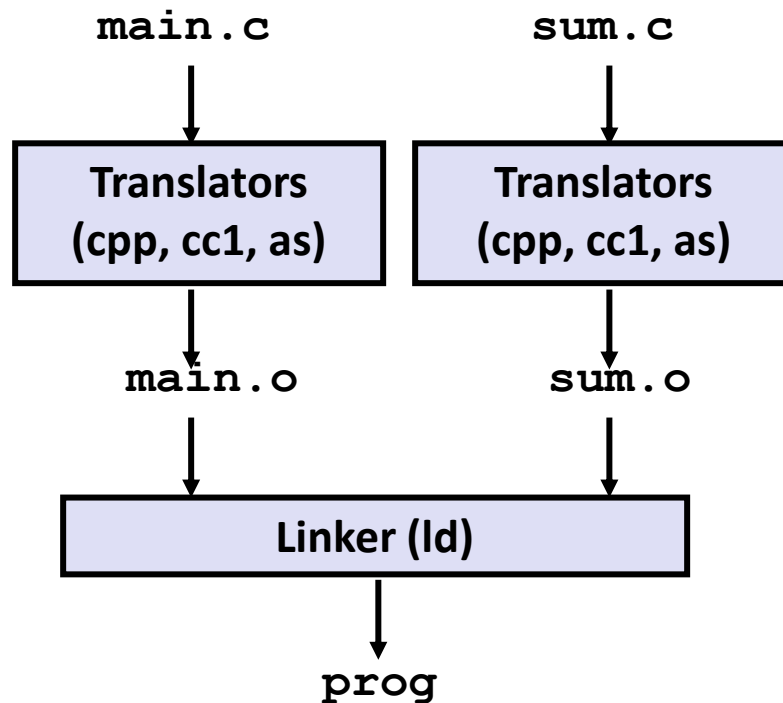

Static Linking

- Programs are translated and linked using a *compiler driver*:


- `linux> gcc -Og -o prog main.c sum.c`
- `linux> ./prog`

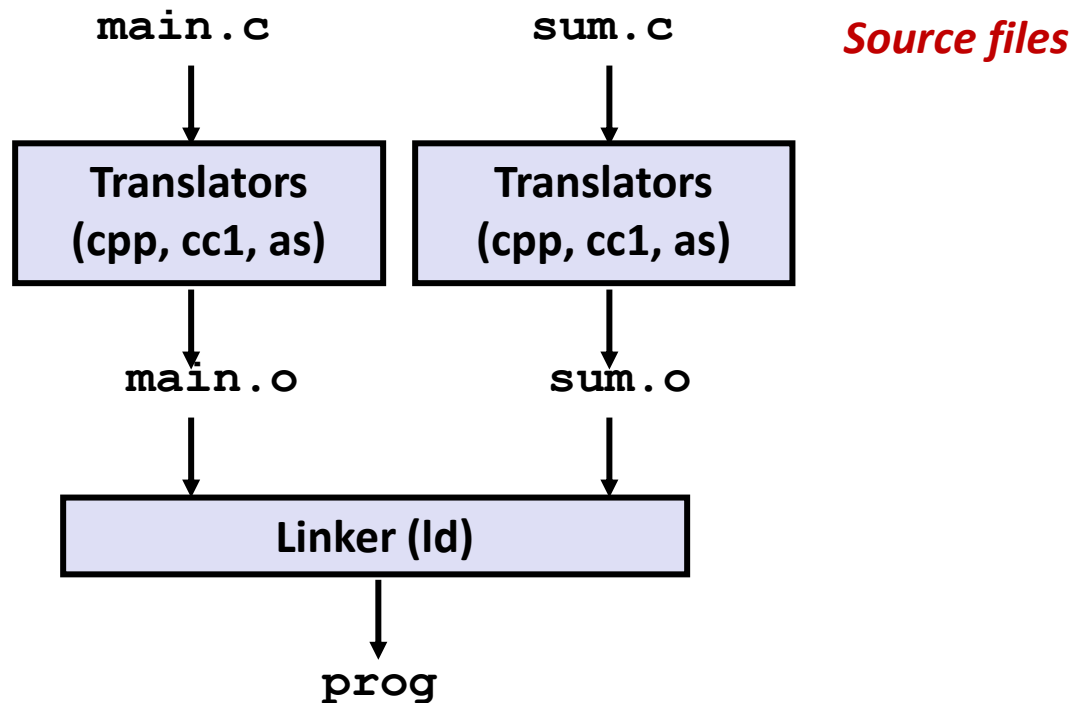

Static Linking

- Programs are translated and linked using a *compiler driver*:


- `linux> gcc -Og -o prog main.c sum.c`
- `linux> ./prog`

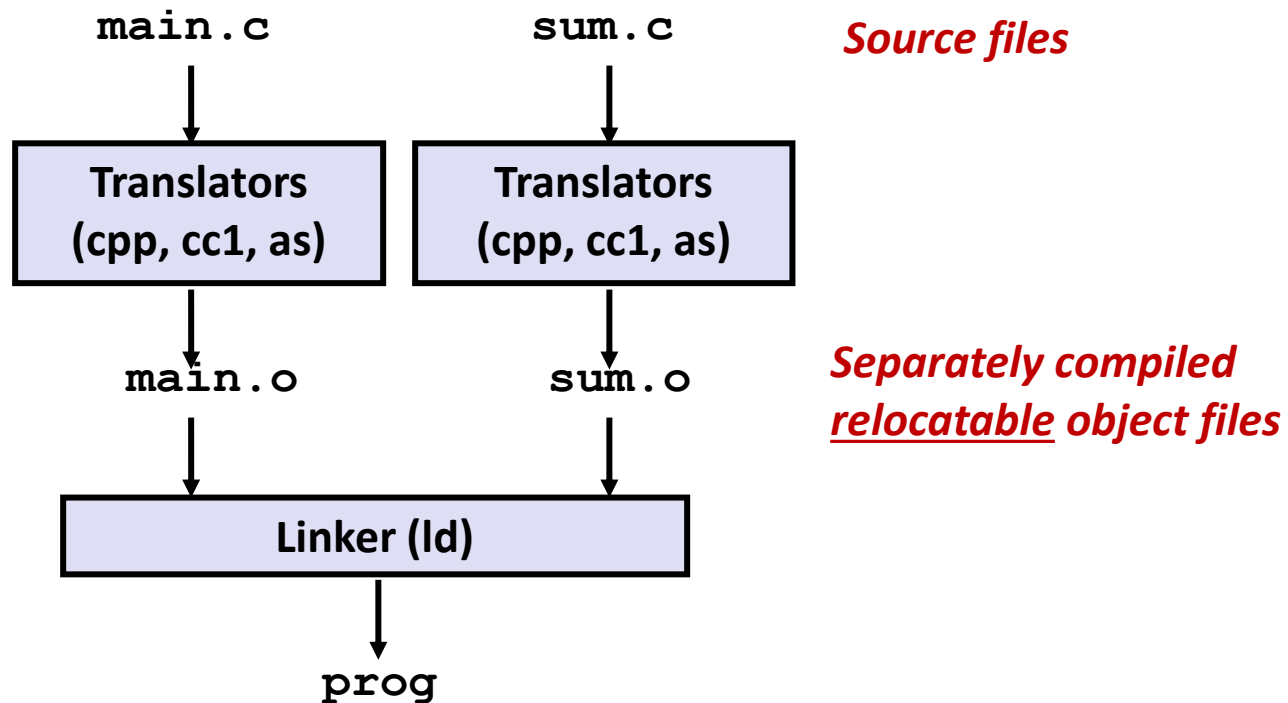

Static Linking

- Programs are translated and linked using a *compiler driver*:

- `linux> gcc -Og -o prog main.c sum.c`
- `linux> ./prog`

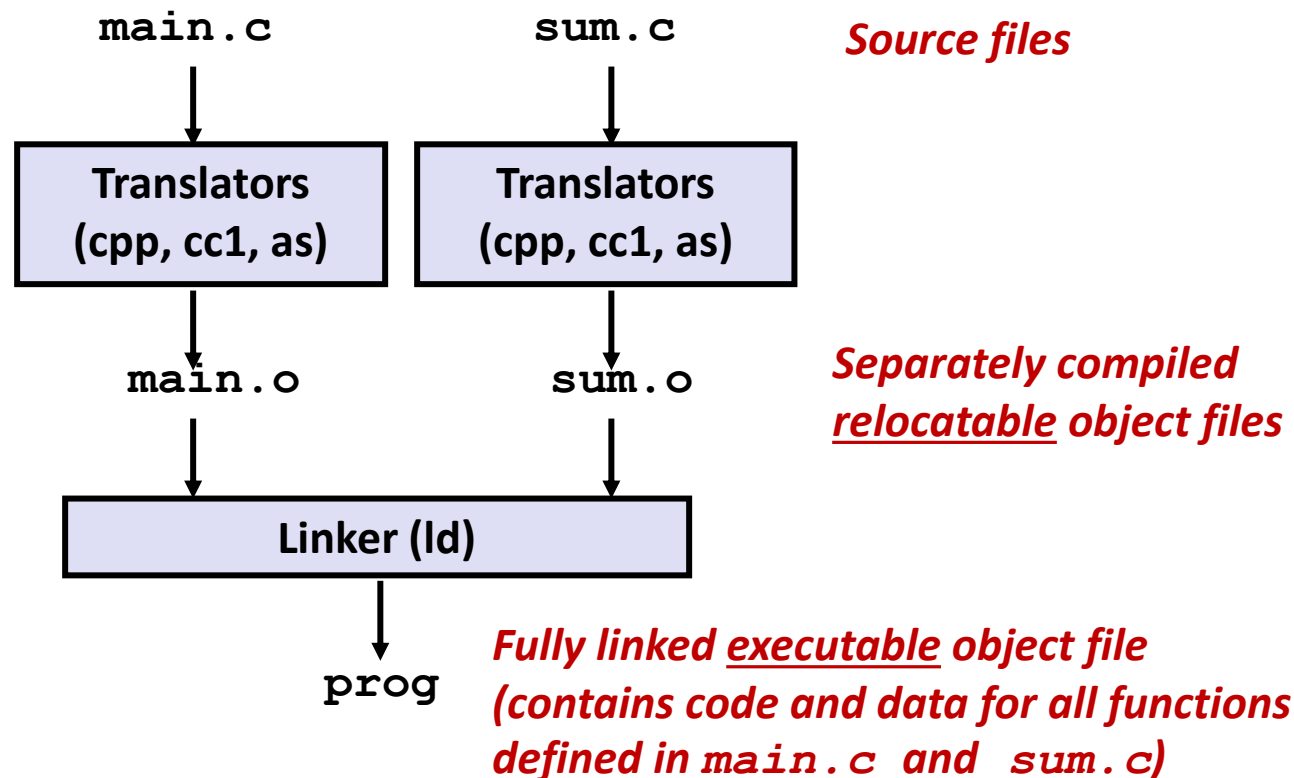

Why Linkers?

■ Reason 1: Modularity

- Program can be written as a collection of smaller source files, rather than one monolithic mass.
- Can build libraries of common functions (more on this later)
 - e.g., Math library, standard C library

Why Linkers? (cont)

■ Reason 2: Efficiency

- Time: Separate compilation
 - Change one source file, compile, and then relink.
 - No need to recompile other source files.
- Space: Libraries
 - Common functions can be aggregated into a single file...
 - Yet executable files and running memory images contain only code for the functions they actually use.

What Do Linkers Do?

■ Step 1: Symbol resolution

- Programs define and reference *symbols* (global variables and functions):
 - `void swap() {...} /* define symbol swap */`
 - `swap(); /* reference symbol swap */`
 - `int *xp = &x; /* define symbol xp, reference x */`
- Symbol definitions are stored in object file (by assembler) in *symbol table*.
 - Symbol table is an array of `structs`
 - Each entry includes name, size, and location of symbol.
- **During symbol resolution step, the linker associates each symbol reference with exactly one symbol definition.**

What Do Linkers Do? (cont)

■ Step 2: Relocation

- Merges separate code and data sections into single sections
- Relocates symbols from their relative locations in the `.o` files to their final absolute memory locations in the executable.
- Updates all references to these symbols to reflect their new positions.

Let's look at these two steps in more detail....