

Model Enumeration using IPASIR-UP without Blocking Clauses

Timpe Hörig

September 23, 2026

Model Enumeration using IPASIR-UP without Blocking Clauses

Model Enumeration

$$\text{cnf: } (X \vee Y) \wedge (\bar{Y} \vee Z)$$

$$\text{solution 1: } X \wedge Y \wedge Z$$

$$\text{solution 2: } \bar{X} \wedge Y \wedge Z$$

$$\text{solution 3: } X \wedge \bar{Y} \wedge Z$$

$$\text{solution 4: } X \wedge \bar{Y} \wedge \bar{Z}$$

Model Enumeration using Blocking Clauses

Pseudo Code

```
list[model] ms
while solver.solve(cnf) == SAT:
    model m = solver.solution()
    ms += [m]
    cnf += not(m)
```

Model Enumeration using Blocking Clauses

Blocking Clause

$$cnf : (X \vee Y) \wedge (\bar{Y} \vee Z)$$

$$model : X \wedge Y \wedge Z$$

$$\text{not}(model) : \neg(X \wedge Y \wedge Z) \iff \bar{X} \vee \bar{Y} \vee \bar{Z}$$

$$new\ cnf : (X \vee Y) \wedge (\bar{Y} \vee Z) \wedge (\bar{X} \vee \bar{Y} \vee \bar{Z})$$


Model Enumeration using IPASIR-UP

IPASIR-UP extends IPASIR by an User Propagator

- ▶ `cb_check_found_model`
- ▶ `cb_has_external_clause`
- ▶ `cb_add_external_clause_lit`
- ▶ `notify_assignment`
- ▶ `notify_new_decision_level`
- ▶ `notify_backtrack`
- ▶ `cb_decide`
- ▶ `cb_propagate`
- ▶ `cb_add_reason_clause_lit`

Model Enumeration without Blocking Clauses

cnf: $(X \vee Y) \wedge (\bar{Y} \vee Z)$

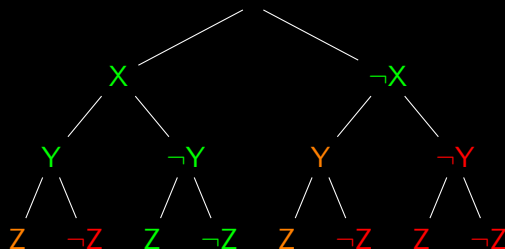

Model Enumeration without Blocking Clauses

Continue the search after finding a model

```
bool cb_check_found_model(model &m):  
    ...  
    new_dl = highest_dl_with_positive_decision()  
    if (new_dl <= 0) return true  
    solver->force_backtrack(new_dl - 1)  
    ...  
    return false
```

Model Enumeration without Blocking Clauses

Continue the search after backtracking

1. Propagate the negation of the old decision
2. Decide the negation of the old decision

Model Enumeration without Blocking Clauses

Propagate the negation of the old decision

```
bool cb_propagate():  
    ...  
    return -decisions.back()  
  
bool cb_add_reason_clause_lit(propagated_lit):  
    return propagated_lit  
    return -decisions[dl]  
    ...  
    return -decisions[1]  
    return 0
```


Model Enumeration without Blocking Clauses

Decide the negation of the old decision

```
bool cb_decide():  
    ...  
    if decisions[dl + 1] != 0:  
        return -decisions[dl + 1]  
    ...
```

Implicant Shrinking

cnf: $(X \vee Y) \wedge (\bar{Y} \vee Z)$

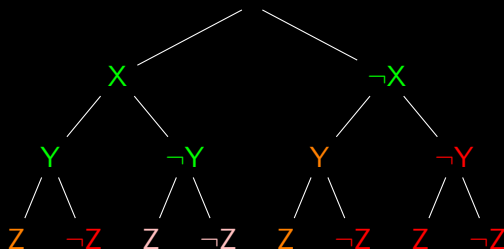

Implicant shrinking

2-watching literal scheme

$$\text{cnf} : \quad (\overset{\uparrow}{X} \vee \overset{\uparrow}{Y}) \wedge (\overset{\uparrow}{\bar{Y}} \vee \overset{\uparrow}{Z})$$

$$\text{cnf}' : \quad (\overset{\uparrow}{X} \vee \overset{\uparrow}{Y}) \wedge (\overset{\uparrow}{\bar{Y}} \vee \overset{\uparrow}{Z} \vee X)$$

Benchmarks


Benchmark Sets

- ▶ TabularAllSat
- ▶ SATLIB
- ▶ Model Counting Competition 2025


Solvers

- ▶ CaDiCaI
- ▶ TabularAllSat
- ▶ Dualiza


TabularAllSat Benchmarks

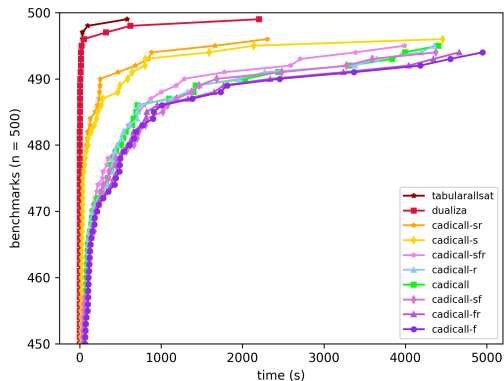

SATLIB Benchmarks

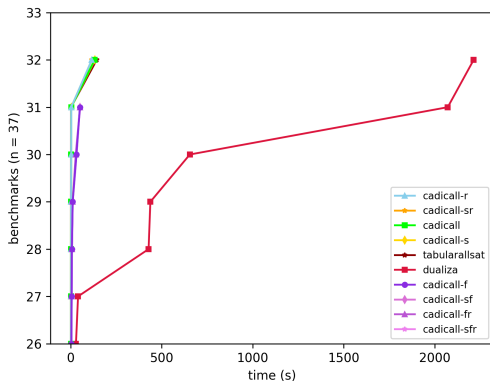

Model Counting Competition 2025 Benchmarks

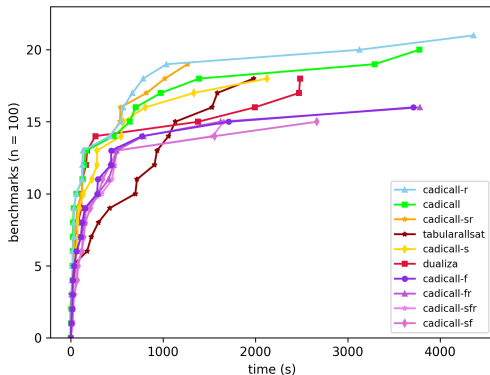

Four Figures - BMS, Custom, MC

