

ONBRD-01: Getting Started: Your First Steps in Dynatrace

Series: ONBRD — Dynatrace Onboarding | **Notebook:** 1 of 10 | **Created:** December 2025 | **Last Updated:** 10/02/2026

Finding Your Way Around

Welcome to Dynatrace. This notebook helps you get oriented in your new environment—where to find things, how to navigate, and what to do first.

Table of Contents

1. [Accessing Your Environment](#)
 2. [Understanding the Navigation](#)
 3. [Key Areas to Know](#)
 4. [Your Environment ID and URLs](#)
 5. [Checking What's Already There](#)
 6. [Next Steps](#)
-

Prerequisites

- Access credentials for your Dynatrace tenant
- A modern web browser (Chrome, Firefox, Edge, Safari)

Sprint 1.337 (April 2026): Defaults for New Customers

Three sprint-1.337 changes establish what "new customer onboarding" should default to in 2026:

1. **Platform tokens (dt0s16) with Authorization: Bearer ...** — recommended default for all new automation. Classic dt0c01 (Authorization: Api-Token ...) still works for legacy paths but should not be the default for new pipelines. Wrong scheme returns 401 Unsupported authorization scheme even when scopes are correct (covered in ONBRD-02 IAM and Authentication).
2. **Settings v2 (Environment API v2)** — new automation should target Settings v2 paths. Sprint 1.337 SaaS announced that many remaining Configuration API endpoints now have Settings v2 equivalents. Plan onboarding tooling around Settings v2 (Terraform dynatrace_settings , Monaco v2). See ONBRD-06 (Organizing Your Environment) and ONBRD-09 (Setting Up Alerts) for the schema-id patterns to use.
3. **Extensions 2.0** (managed via the Dynatrace API Application → Extensions surface) — **the current framework for customers adopting custom Extensions.** Extensions Framework 1.0 reached end of support on 2025-03-31 (Python EF1.0: 2024-10-31); JMX and PMI EF1.0 are deprecated but supported past that date on request — advocate migrating any remaining EF1.0 extensions in onboarding conversations.

Also: **OneAgent primary fields/tags at the source** (Latest Dynatrace) means new customers should be told to design their tag taxonomy with primary tags first-class — set during OneAgent install via `oneagentctl --set-host-tag="primary_tags.<key>=<value>"` — the `primary_tags.` prefix must be written explicitly. Covered in ONBRD-05 (Deploying OneAgent) and ONBRD-06 (Organizing Your Environment).

1. Accessing Your Environment

Your Dynatrace environment is accessed via a URL specific to your tenant:

```
https://{tenant-id}.apps.dynatrace.com
```

Finding Your Tenant ID

Your tenant ID is the first part of your Dynatrace URL. For example:

- URL: `https://abc12345.apps.dynatrace.com`

- Tenant ID: `abc12345`

Write down your tenant ID—you'll need it for API tokens, OneAgent deployment, and integrations.


First Login

1. Navigate to your tenant URL
2. Enter your credentials (local user or SSO)
3. Complete any MFA requirements
4. You'll land on the default home screen

Note: If your organization is setting up SAML/SSO, see **ONBRD-02: IAM and Authentication** before inviting additional users.

2. Understanding the Navigation

Dynatrace uses a left-hand navigation menu organized by function. The platform is built around **Apps**—each capability is an app you can launch.

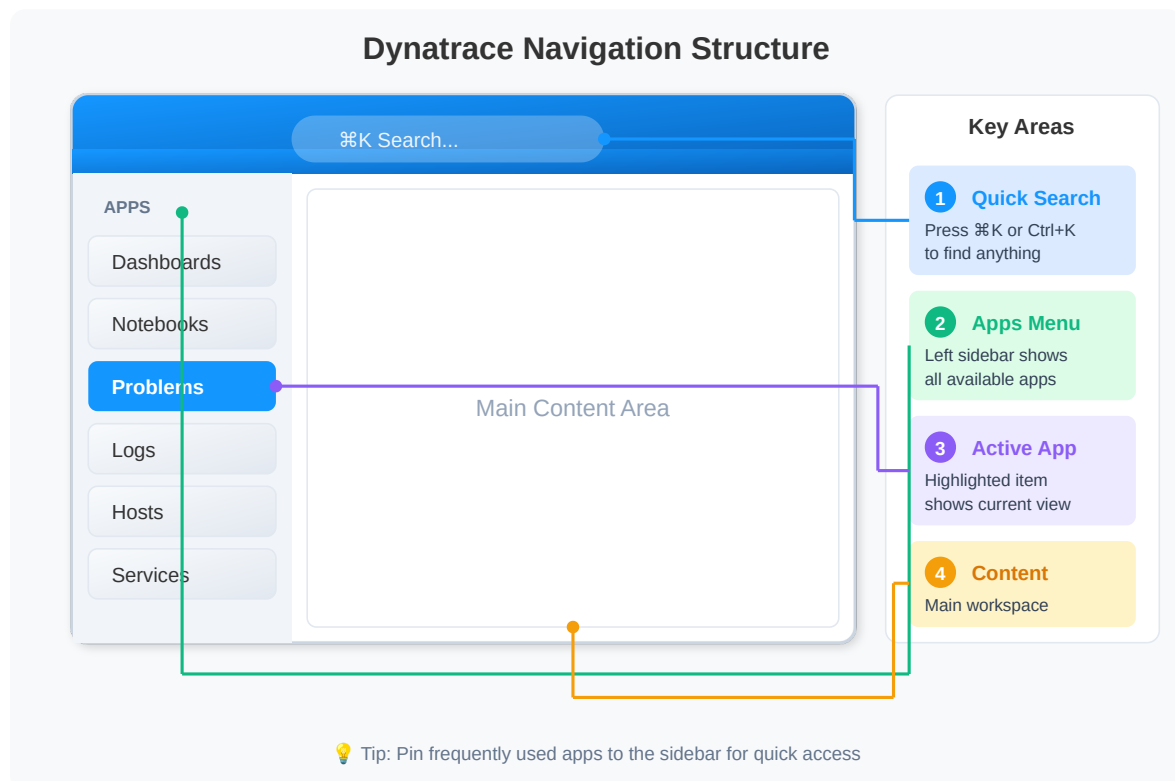

Quick Search

Press **Cmd+K** (Mac) or **Ctrl+K** (Windows/Linux) to open the quick search. Type anything:

- Entity names (hosts, services)
- App names
- Keywords like "logs" or "problems"

The App Launcher

Click the grid icon to see all available apps. You can:

- Pin frequently used apps to your sidebar
- Discover new apps in the Dynatrace Hub
- Install apps from the Hub to extend functionality

3. Key Areas to Know

Hosts App

The Hosts app shows all monitored infrastructure:

- Host health and resource utilization
- Running processes and services
- Host properties and metadata

Problems App

DAVIS AI automatically detects problems and correlates related events. This is where you'll see:

- Active issues requiring attention
- Root cause analysis
- Affected entities
- Problem timeline and resolution

Logs & Events App

Explore all log data ingested into Dynatrace:

- Full-text search across logs
- Filter by source, severity, content
- Correlate logs with traces and metrics

Notebooks App

Interactive analysis environment (you're using one now!):

- Write and execute DQL queries
- Document investigations
- Share findings with your team

Workflows App

Automation and alerting for the modern platform:

- Create automated responses to problems
- Configure notifications (Slack, email, PagerDuty, etc.)
- Build custom automation logic

4. Your Environment ID and URLs

Several URLs are important to bookmark:

Purpose	URL Pattern
Main UI	<code>https://{tenant-id}.apps.dynatrace.com</code>
Platform API	<code>https://{tenant-id}.apps.dynatrace.com/platform/</code>
Account Management	<code>https://account.dynatrace.com</code>

API Access

Modern Dynatrace platform access uses three credential types — choose based on the integration:

Token Type	Prefix	When to Use
Platform Token <i>(recommended default)</i>	<code>dt0s16</code>	New automation, Workflows, MCP integrations, OpenPipeline configuration
OAuth Client	(client ID + secret)	External SaaS integrations, account-admin automation
Classic API Token <i>(legacy phase-out)</i>	<code>dt0c01</code>	Existing scripts; migrate to Platform Token where possible

For OneAgent and ActiveGate deployment, installer downloads use a **PaaS / installer token** (classic access token with the `InstallerDownload` scope) generated in your environment's **Access Tokens** app → **Generate new token**. Token management depth lives in **ONBRD-02**.

5. Checking What's Already There

Before deploying OneAgent, check if any data is already flowing. Run these queries to see what exists in your environment.

```
// Count entities by type - see what's been discovered
fetch dt.entity.host
| summarize host_count = count()

// Smartscape equivalent (dt.entity.* is deprecated but still functional):
//   smartscapeNodes "HOST"
//   | summarize host_count = count()
// Caveat: Smartscape reflects CURRENT live topology and can report fewer
// entities
// than the classic entity store; for a pre-migration discovery inventory keep
// the
// classic query above.
```

```
// List all discovered hosts
fetch dt.entity.host
| fields entity.name, state
| sort entity.name
| limit 50

// Smartscape note (dt.entity.* is deprecated but still functional): this
// query uses the
// classic-only field state, which has NO Smartscape node equivalent
// (Smartscape expresses liveness via node lifetime, not a state field). Keep
// the classic
// query above for state detail. For monitoring mode, do not use
// monitoringMode — it is
// empty on Kubernetes and Fargate hosts; read billing events instead (ONBRD-
// 05 § 6).
// Other fields do map: entity.name -> name.
```

```
// Check for any services
fetch dt.entity.service
| fields entity.name, serviceType
| sort entity.name
| limit 50

// Smartscape equivalent (dt.entity.* is deprecated but still functional):
//   smartscapeNodes "SERVICE"
//   | fields name, dt.service.sdv1_type
//   | sort name
//   | limit 50
// Caveat: Smartscape reflects CURRENT live topology and can report fewer
// entities
// than the classic entity store; for a pre-migration discovery inventory keep
// the
// classic query above.
// Field maps: serviceType -> dt.service.sdv1_type; entity.name -> name.
```

```
// Check for recent log data
fetch logs, from: now() - 1h
| summarize log_count = count()
```

```
// Check for recent problems
fetch dt.davis.problems, from: now() - 7d
| fields timestamp, display_id, event.name, event.status
| sort timestamp desc
| limit 10
```

Interpreting Results

Result	What It Means	Next Step
Hosts found	OneAgent or cloud integration active	Explore the Hosts app
No hosts	No monitoring deployed yet	Deploy OneAgent (ONBRD-05)
Services found	Application-level monitoring working	Review service mapping
Logs found	Log ingestion configured	Explore Logs & Events app
Problems found	DAVIS is detecting issues	Review problem details

6. Next Steps

Now that you're oriented in the Dynatrace UI, proceed based on your priorities:

Recommended Path

1. **ONBRD-02: IAM and Authentication** - Set up SAML/SSO, Platform Tokens, and user permissions before inviting your team
2. **ONBRD-03: Deploying ActiveGate** - Set up network routing (if needed)
3. **ONBRD-04: Cloud & SaaS Integrations** - Connect AWS / Azure / GCP and SaaS data sources
4. **ONBRD-05: Deploying OneAgent** - Start getting infrastructure and application data
5. **ONBRD-06: Organizing Your Environment** - Set up tags, segments, and naming conventions

Migrating from Another Platform?

If you're migrating from another APM tool, the deep-dive translation series cover concept mapping, query translation, and cutover patterns:

- **NRLC** (NR → Dynatrace component deep dives) + **NR2DT** (procedural runbook) for New Relic
- **SL2DT** for Sumo Logic logs/dashboards/monitors
- **S2D** for Splunk
- **M2S** for Managed-to-SaaS Dynatrace migrations

Pair the migration series with this **ONBRD** series for the platform-fundamentals foundation.

Key Tasks Before Moving On

- [] Bookmark your tenant URL
 - [] Note your tenant ID
 - [] Explore the App Launcher
 - [] Open the Hosts app (even if empty)
 - [] Find Account Management for tokens and users
-

Summary

In this notebook, you learned:

- How to access your Dynatrace environment
 - The app-based navigation structure
 - Key apps: Hosts, Problems, Logs & Events, Notebooks, Workflows
 - Important URLs for your tenant
 - How to check what data already exists
-

References

- [Get Started with Dynatrace](#)
 - [Navigate the Dynatrace Platform](#)
 - [Dynatrace Community - Start with Dynatrace](#)
-

This notebook was AI-generated from community-submitted and publicly available sources. This notebook series is not officially supported by Dynatrace. Always verify information against official Dynatrace documentation.