

APPSEC-02: Runtime Vulnerability Analytics

Series: APPSEC — Application Security | **Notebook:** 2 of 10 | **Created:** June 2026 |
Last Updated: 10/02/2026

Overview

Runtime Vulnerability Analytics (RVA) is the pillar of Dynatrace AppSec that continuously inspects running processes and answers: *which CVEs are reachable from production code paths, and which production data assets are exposed to those code paths?* This notebook covers third-party (library) vulnerability detection — the loudest, highest-volume signal in most AppSec rollouts. Code-level (first-party) vulnerabilities are covered in APPSEC-03.

The distinguishing capability vs scanner-based tools: RVA reports a vulnerability only for components a running process has actually loaded, not for every declared dependency. For Java, the optional *Java vulnerable function reporting* OneAgent feature also shows whether the vulnerable function is in use — a triage filter, not a DSS input.

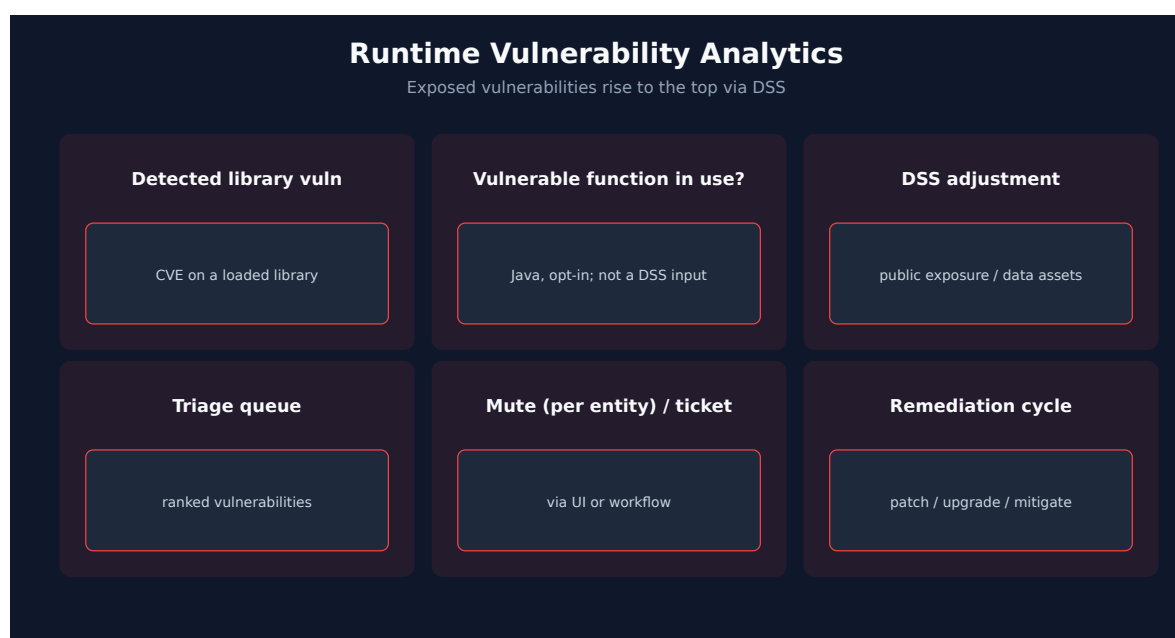


Table of Contents

1. [1. What RVA Detects](#)
 2. [2. Loaded, In Use, Exposed](#)
 3. [3. Triage with DQL](#)
 4. [4. Triage by Affected Entity](#)
 5. [5. Acknowledge / Mute / Exception Lifecycle](#)
 6. [6. Next Steps](#)
 7. [References](#)
-

Prerequisites

Requirement	Details
Dynatrace Environment	Gen3 SaaS with Grail; AppSec entitlement enabled
OneAgent	Full-Stack mode (or code-module attached) on monitored hosts
Read access	To run the DQL: <code>storage:security.events:read</code> plus <code>storage:buckets:read</code> (a table permission alone reads nothing). The Vulnerabilities and Threats & Exploits apps have their own requirements — see APPSEC-09 for the full model
Background	APPSEC-01 (fundamentals + three-pillar framing)

1. What RVA Detects

Broader malicious-package coverage in RVA (SaaS 1.344, released 07/29/2026 — staged rollout). Malicious package detection coverage in the Dynatrace Vulnerability Feed has been expanded. These records use the same structure as vulnerability records, so they arrive through the same `security.events` surface used throughout this notebook; titles begin with *Malicious code* and each record

carries CWE-506 (Embedded Malicious Code). The distinction matters for triage: a CVE is a defect in legitimate software and is scored on exploitability and reachability, whereas a malicious package is hostile by construction — the reachability question that governs CVE prioritisation below does not soften it, and the response is removal, not patching.

Source: [What's new in Dynatrace SaaS 1.344 \(DT docs\)](#) — "Malicious package detection coverage in the Dynatrace Vulnerability Feed has been expanded." and "Titles begin with Malicious code to distinguish them from known vulnerabilities."

RVA continuously inventories libraries loaded by monitored processes, correlates them against vulnerability feeds, and produces two kinds of records:

Record	Where	What it represents
Security events	Grail <code>security.events</code>	Periodic state snapshots (<code>VULNERABILITY_STATE_REPORT_EVENT</code>) and status transitions (<code>VULNERABILITY_STATUS_CHANGE_EVENT</code>), each at two levels: per vulnerability (<code>event.level == "VULNERABILITY"</code>) and per affected entity (<code>event.level == "ENTITY"</code>)
Security problem	<code>vulnerability-service</code>	Deduped, Davis-grouped view of one underlying CVE across all affected entities

A single CVE in `log4j-core-2.14.1` running on 47 hosts is **one security problem** with 47 affected entities — and, in Grail, a recurring stream of snapshots at both levels.

Practical implication: RVA re-reports the open state of every vulnerability at regular intervals, so a raw `count()` of state events grows with the time window and the re-report frequency, not with the number of vulnerabilities. Every DQL query in this series therefore picks one `event.level`, keeps the **latest** snapshot per vulnerability (or per vulnerability + entity), and only then counts.

Sources: [Application Security \(DT docs\)](#) for the RVA framing; [Vulnerability events \(DT semantic dictionary\)](#) — "An entity state event is a periodic snapshot, emitted by Dynatrace Runtime Vulnerability Analytics (RVA), of a vulnerability's current status on a single affected entity." and "RVA re-reports the open state at regular intervals and reports a resolved state once" (re-read 09/18/2026).

2. Loaded, In Use, Exposed

RVA's prioritization model has three layers. From least to most actionable:

1. **Library loaded** — a running process has loaded the vulnerable component. RVA reports only these, which already removes declared-but-unloaded dependencies from a scanner's list.
2. **Vulnerable function in use** (Java only, opt-in) — with the *Java vulnerable function reporting* OneAgent feature enabled,
`vulnerability.davis_assessment.vulnerable_function_status` is `IN_USE`, `NOT_IN_USE` or `NOT_AVAILABLE`. Use it to filter triage. It is **not** a DSS input, so nothing is de-prioritized automatically — you have to filter on it.
3. **Exposed** — the affected process is reachable from the public internet or has database access. These are the DSS inputs: without them DSS is lowered from the CVSS base score (APPSEC-01 § 4). This is the smallest set, and the one to remediate first.

Sources: [Vulnerability Analytics \(DT docs\)](#) — "Issues a vulnerability only when the component is in use."; [Vulnerabilities concepts \(DT docs\)](#) — a vulnerable function is "One of the risk factors to consider when evaluating a vulnerability (yet they are not considered for the DSS calculation)"; [Secure FAQ \(DT docs\)](#) — "If the Dynatrace Vulnerability feed provides information about the vulnerable function, and OneAgent monitoring for Java vulnerable functions is enabled, OneAgent determines whether the vulnerable function is in use." (all re-read 10/02/2026). **Dictionary:**
`vulnerability.davis_assessment.vulnerable_function_status` (`stable` ; `IN_USE` ; `NOT_AVAILABLE` ; `NOT_IN_USE`), read 10/02/2026.

3. Triage with DQL

The **Vulnerabilities** app is the day-to-day triage surface, but DQL gives you fleet-wide rollups the UI cannot. Two patterns to know. The first counts **current open vulnerabilities by risk level** — the vulnerability-level snapshot, deduplicated to the latest record per vulnerability, then filtered to open and not muted.

```
// Current open vulnerabilities by risk level (latest snapshot per
vulnerability)
fetch security.events, from:-7d
| filter event.provider == "Dynatrace"
| filter event.category == "VULNERABILITY_MANAGEMENT"
| filter event.type == "VULNERABILITY_STATE_REPORT_EVENT"
| filter event.level == "VULNERABILITY"
| dedup {vulnerability.display_id}, sort:{timestamp desc}
| filter vulnerability.resolution.status == "OPEN"
| filter vulnerability.mute.status == "NOT_MUTED"
| summarize open = count(), by:{vulnerability.risk.level}
| sort open desc
```

4. Triage by Affected Entity

A second pattern: which process groups and hosts are carrying the most open vulnerabilities right now? This is the cheapest way to find a stale base image or unmaintained dependency. It uses the **entity-level** snapshot, deduplicated per vulnerability + affected entity.

```
// Top affected entities by current open vulnerabilities (latest snapshot per
vulnerability + entity)
fetch security.events, from:-7d
| filter event.provider == "Dynatrace"
| filter event.category == "VULNERABILITY_MANAGEMENT"
| filter event.type == "VULNERABILITY_STATE_REPORT_EVENT"
| filter event.level == "ENTITY"
| dedup {vulnerability.display_id, affected_entity.id}, sort:{timestamp desc}
| filter vulnerability.resolution.status == "OPEN"
| filter vulnerability.mute.status == "NOT_MUTED"
| summarize open = count(), by:{affected_entity.name,
vulnerability.risk.level}
| sort open desc
| limit 25
```

Validation note: both queries were validated for syntax and field names on 09/18/2026 and execute cleanly; the validation tenant has no RVA data, so they returned 0 rows there. The dedup-then-filter logic was additionally exercised on synthetic records. Expect real counts only on a tenant with RVA enabled.

Sources: [Vulnerability events \(DT semantic dictionary\)](#) — the event types, `event.level` values, and dedup pattern follow the page's own queries; "A *vulnerability state event* is a periodic snapshot, emitted by Dynatrace Runtime Vulnerability Analytics (RVA), of a vulnerability's current status and risk aggregated across every entity it affects." (re-read 09/18/2026). **Dictionary:**

`vulnerability.risk.level (stable)`, `vulnerability.resolution.status (stable)`, `vulnerability.mute.status (stable)`, `vulnerability.display_id (stable)`, `event.provider (stable)`, `event.type (stable)`, read 09/18/2026; `event.level`, `event.category`, `affected_entity.id` and `affected_entity.name` are documented as `stable` on the page above.

5. Acknowledge / Mute / Exception Lifecycle

The product has three vulnerability states. **Open** — the vulnerability is active. **Resolved** — closed automatically because the root cause is no longer present. **Muted (Open)** — still active, but every affected entity was muted by request. Muting is per affected entity and is **not** the same as fixing: muted vulnerabilities still appear in audit queries.

Acknowledge and *exception* are not product states. In community practice they are conventions layered on top:

- **Acknowledge** = triaged and ticketed (Jira/ServiceNow link captured in the workflow — see APPSEC-08).
- **Mute** only when the CVE is genuinely false-positive or a compensating control is in place. Always capture the reason; the audit trail is the artifact.
- **Exception** = time-boxed accepted risk (waiting on a vendor patch), recorded as a mute reason or a ticket, paired with an SLA reminder so it expires.

For governance reporting, treat open, not-muted vulnerabilities without a ticket as the open backlog.

Sources: [Vulnerabilities concepts \(DT docs\)](#) — "Muted (Open) The vulnerability is active but all its affected entities were muted by request." (re-read 10/02/2026). **Softened:** the *acknowledge vs mute vs exception* discipline is community practice — the docs define the states, not the governance recipe.

6. Next Steps

1. Run the two DQL queries above against your tenant. Zero rows means either no RVA data (check enablement) or no open vulnerabilities — confirm with `fetch security.events, from:-7d | summarize n = count(), by:{event.type}` before concluding.
2. Read **APPSEC-03** for first-party (code-level) vulnerability analytics — same Grail surface, different finding type.
3. Read **APPSEC-08** for the workflow patterns that route RVA findings to your ticketing system.
4. Read **APPSEC-09** before granting the SOC write access to vulnerabilities — the privacy-sensitive carve-outs matter.

References

Source	Coverage
Application Security (DT docs)	Three-pillar hub including RVA
Vulnerability events (DT semantic dictionary)	Event types, <code>event.level</code> , field definitions and stability for RVA records
What's new in Dynatrace SaaS 1.344 (DT docs)	Expanded malicious-package coverage
Secure / FAQ (DT docs)	Official AppSec FAQ
IAM policy statements reference (DT docs)	Permission tokens for security data

 **DISCLAIMER:** This information was AI generated and is provided "as-is" without warranty. It was produced as an independent, community-driven project and **not supported by Dynatrace**. Always refer to official [Dynatrace documentation](#) for the most current information.