


HTML Table Basics



Spaghetti Recipe Ingredients

Ingredient	Quantity
Spaghetti Noodles	200 gr
San Marzano Tomatoes	1 can
Olive Oil	2 tbsp
Garlic	2 cloves
Parmesan	1/2 cup

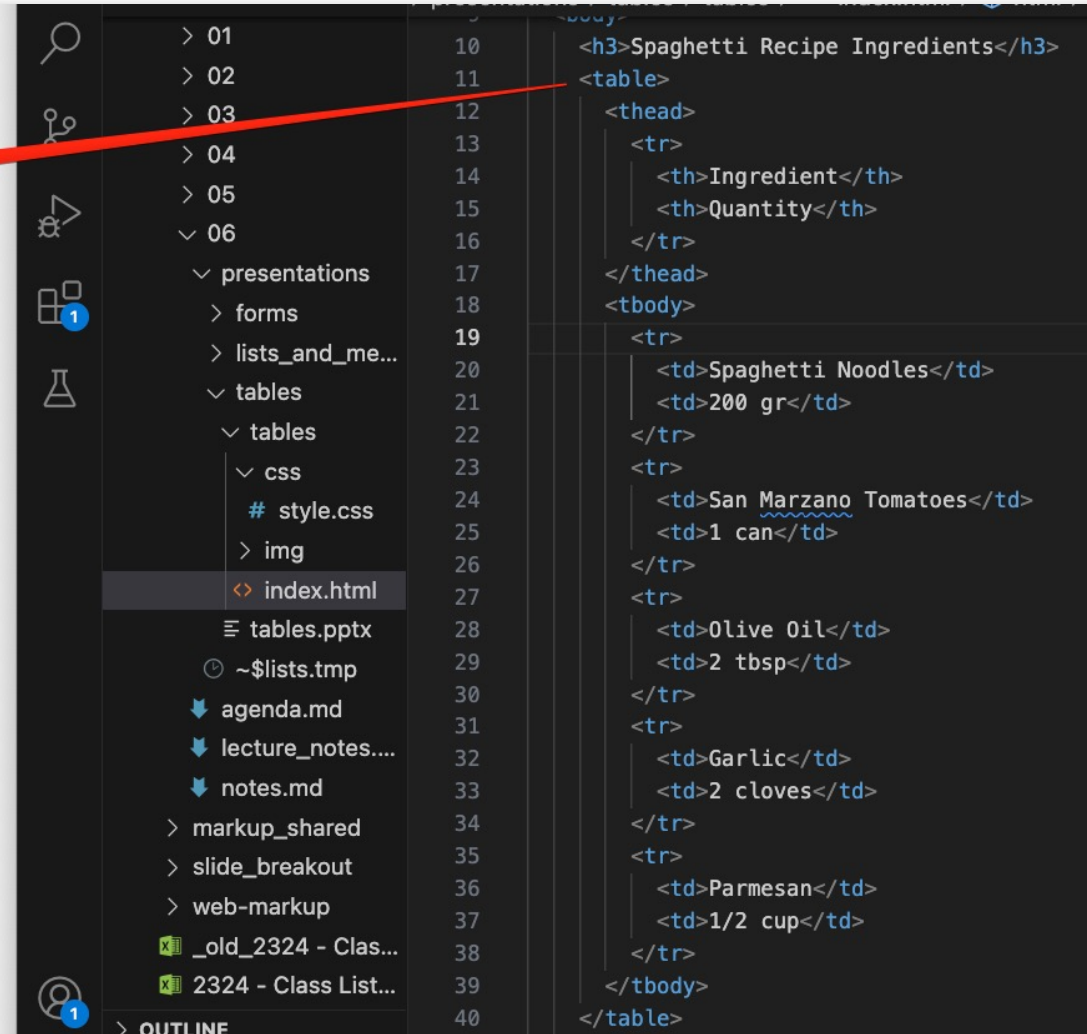

```
> 01 10 <h3>Spaghetti Recipe Ingredients</h3>
> 02 11 <table>
> 03 12 <thead>
> 04 13 <tr>
> 05 14 <th>Ingredient</th>
> 06 15 <th>Quantity</th>
17 16 </tr>
18 17 </thead>
19 18 <tbody>
20 19 <tr>
21 20 <td>Spaghetti Noodles</td>
22 21 <td>200 gr</td>
23 22 </tr>
24 23 <tr>
25 24 <td>San Marzano Tomatoes</td>
26 25 <td>1 can</td>
27 26 </tr>
28 27 <tr>
29 28 <td>Olive Oil</td>
30 29 <td>2 tbsp</td>
31 30 </tr>
32 31 <tr>
33 32 <td>Garlic</td>
34 33 <td>2 cloves</td>
35 34 </tr>
36 35 <tr>
37 36 <td>Parmesan</td>
38 37 <td>1/2 cup</td>
39 38 </tr>
40 39 </tbody>
41 40 </table>
```

HTML Table

- HTML tables are used for displaying tabular data (data that is displayed in rows and columns)
- Tables can have a heading *<thead>* a body *<tbody>* and footer *<tfoot>*
- Table cells can take up multiple columns using the *colspan* attribute and multiple rows using the *rowspan* attribute.

Person	Age
Chris	38
Dennis	45
Sarah	29
Karen	47

Table Head

- The table head uses a `<thead>` element.
- The row(s) in the table head use the `<tr>` (table row) tag.
- Individual cells in the table head use the `<th>` tag

Spaghetti Recipe Ingredients

Ingredient	Quantity
Spaghetti Noodles	200 gr
San Marzano Tomatoes	1 can
Olive Oil	2 tbsp
Garlic	2 cloves
Parmesan	1/2 cup

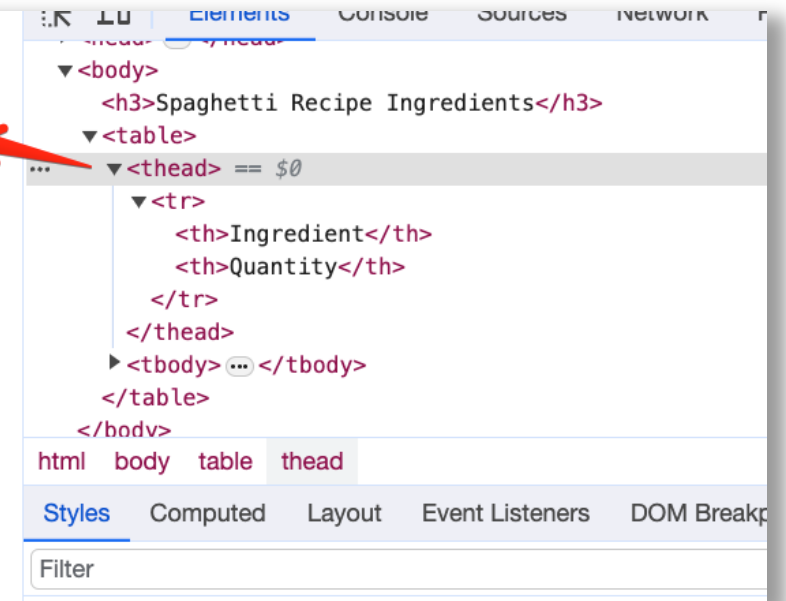


Table Body

- The table body uses a `<tbody>` element.
- The row(s) in the table body use the `<tr>` (table row) tag.
- Individual cells in the table head use the `<td>` tag

Spaghetti Recipe Ingredients

Ingredient	Quantity
Spaghetti Noodles	200 gr
San Marzano Tomatoes	1 can
Olive Oil	2 tbsp
Garlic	2 cloves
Parmesan	1/2 cup

Elements Console Sources NetW

```
<body>
  <h3>Spaghetti Recipe Ingredients</h3>
  <table>
    <thead> ... </thead>
    <tbody> == $0
      <tr>
        <td>Spaghetti Noodles</td>
        <td>200 gr</td>
      </tr>
      <tr> ... </tr>
      <tr> ... </tr>
      <tr> ... </tr>
```

html body table tbody

Styles Computed Layout Event Listeners DO

Filter

In your final project:

- Add a table
- Use a table header
- Use a psedo-class *first-child* selector to give the table's first column a unique background color
- Uses pseudo-class *nth-child* selector to colour the even rows a unique background color
- Style your table appropriately to fit the style of your page

inholland
**university of
applied sciences**