


DER de adavra-sales

13 tablas y 15 foreign keys, generado a partir de db/schema.rb (versión 2026_09_16_214526). Se omiten id, created_at y updated_at, presentes en todas las tablas.

■ Acceso users · sessions ■ Presupuestación clients · projects · budgets · budget_items · rates · time_entries ■ Cobranza maintenance_contracts · maintenance_charges · payments · payment_applications

Diagrama

FK foreign key · UK parte de un índice único. En los extremos de cada línea, || es "exactamente uno", |o es "cero o uno" (FK que acepta NULL) y o{ es "cero o muchos".

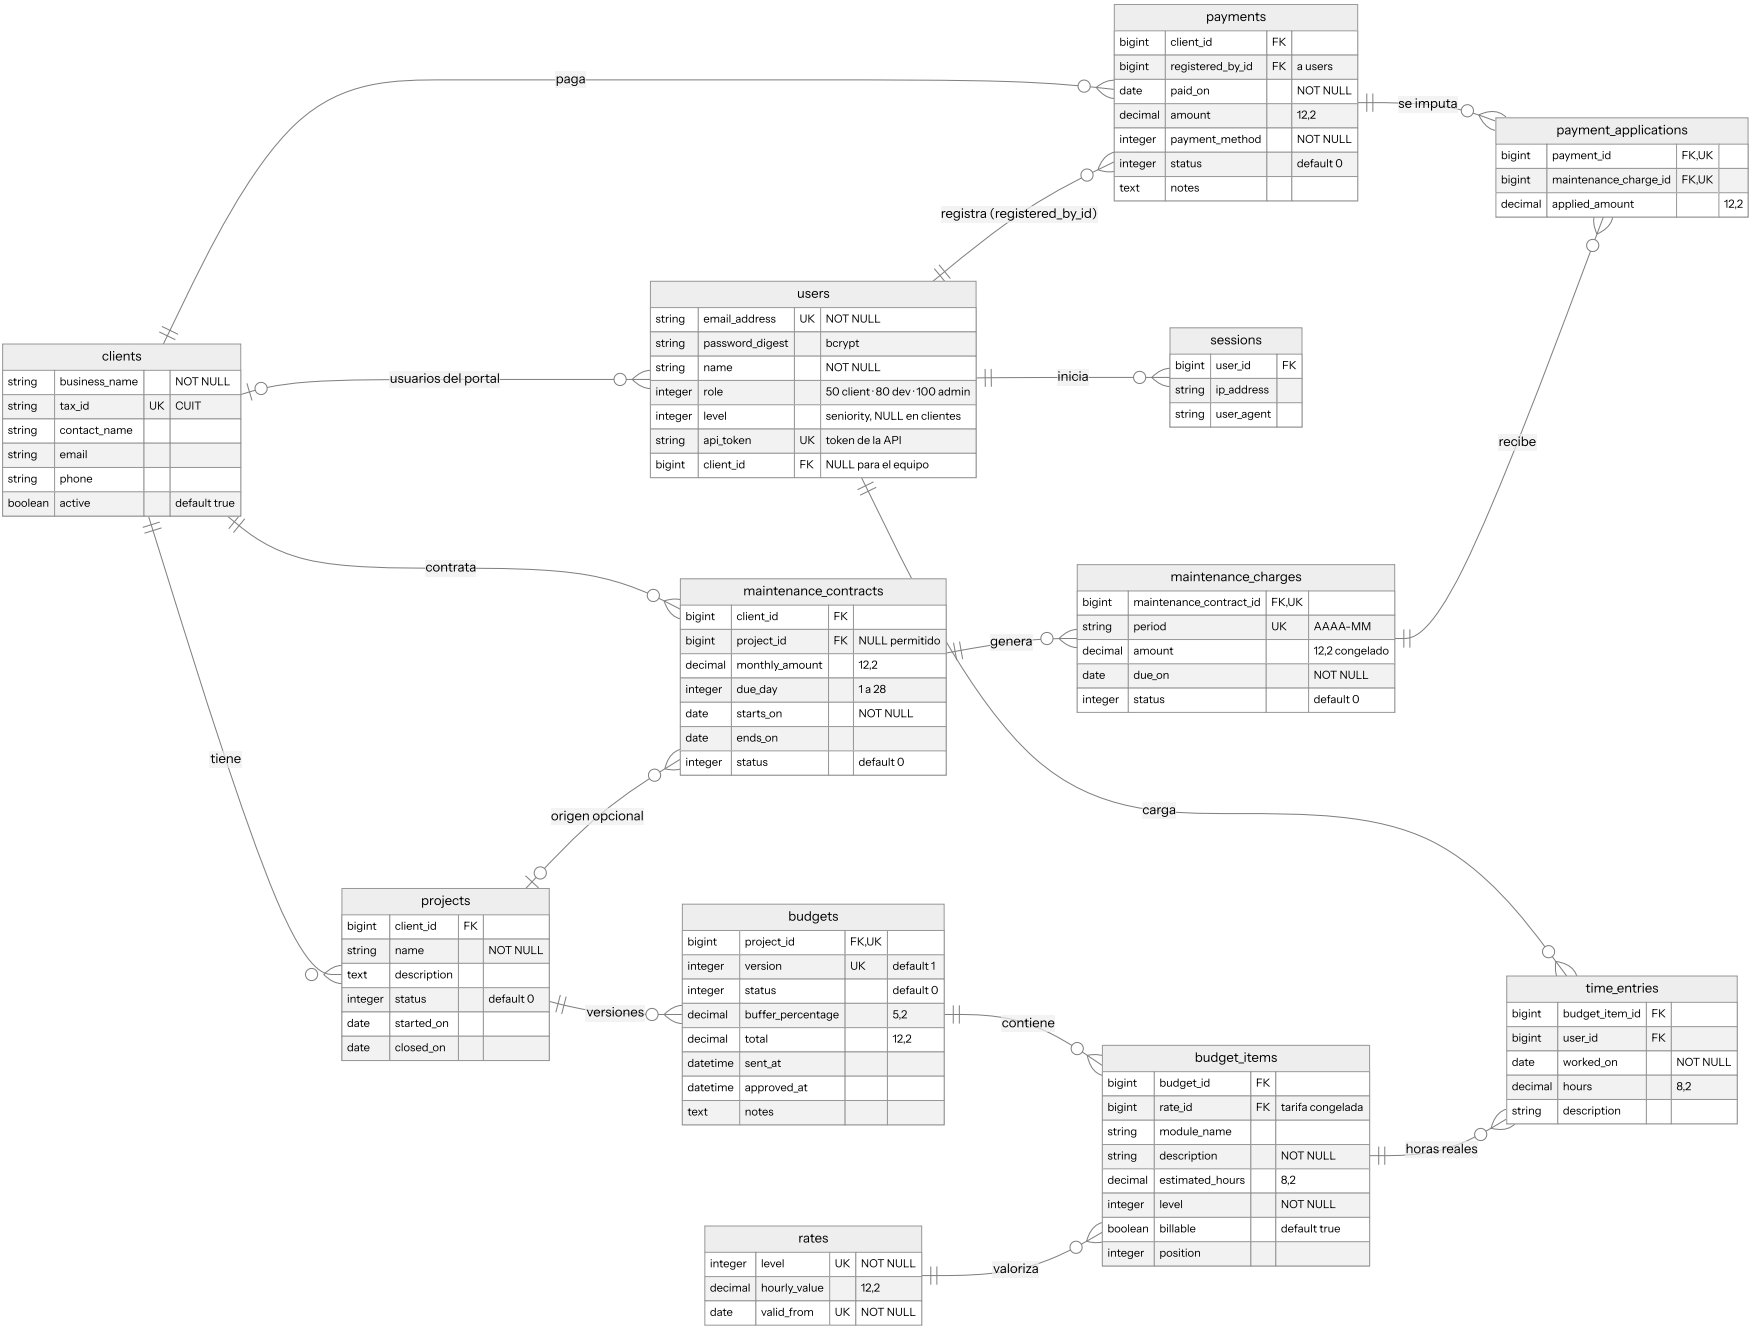

Relaciones

DESDE	HACIA	CARDINALIDAD	FOREIGN KEY	AL BORRAR EL PADRE (RAILS)
■ clients	projects	1 → 0..N	projects.client_id	restrict_with_error
■ clients	maintenance_contracts	1 → 0..N	maintenance_contracts.client_id	restrict_with_error
■ clients	payments	1 → 0..N	payments.client_id	restrict_with_error
■ clients	users	0..1 → 0..N	users.client_id (NULL)	restrict_with_error
■ users	sessions	1 → 0..N	sessions.user_id	destroy
■ users	time_entries	1 → 0..N	time_entries.user_id	restrict_with_error
■ users	payments	1 → 0..N	payments.registered_by_id	restrict_with_error
■ projects	budgets	1 → 0..N	budgets.project_id	restrict_with_error
■ projects	maintenance_contracts	0..1 → 0..N	maintenance_contracts.project_id (NULL)	restrict_with_error
■ budgets	budget_items	1 → 0..N	budget_items.budget_id	destroy
■ rates	budget_items	1 → 0..N	budget_items.rate_id	restrict_with_error
■ budget_items	time_entries	1 → 0..N	time_entries.budget_item_id	restrict_with_error
■ maintenance_contracts	maintenance_charges	1 → 0..N	maintenance_charges.maintenance_contract_id	restrict_with_error
■ payments	payment_applications	1 → 0..N	payment_applications.payment_id	destroy
■ maintenance_charges	payment_applications	1 → 0..N	payment_applications.maintenance_charge_id	restrict_with_error

payments ↔ **maintenance_charges** es muchos a muchos a través de payment_applications: un pago cubre varias cuotas y una cuota recibe varios pagos (regla 14). **projects** → **maintenance_contracts** se declara has_one en el modelo, aunque la base no lo impide.

Índices únicos

Las reglas que garantiza la base, además de la validación en Ruby.

TABLA	COLUMNAS	GARANTIZA
maintenance_charges	contract_id, period	Generación de cuotas idempotente (regla 11)
budgets	project_id, version	Versiones sin repetir por proyecto
payment_applications	payment_id, charge_id	Una imputación por par pago-cuota
rates	level, valid_from	Una tarifa por nivel y vigencia
clients	tax_id	CUIT único
users	email_address	Un usuario por email
users	api_token	Token de API no compartido

Enums

Enteros en la base, nombres en el código. El primer valor es el estado inicial.

COLUMNA	VALORES
users.role	client 50 · developer 80 · admin 100
*.level (SeniorityLevel)	junior 0 · semi 1 · senior 2
projects.status	survey · in_progress · delivered · closed
budgets.status	draft · sent · approved · rejected
maintenance_contracts.status	active · paused · cancelled
maintenance_charges.status	pending · partial · paid · overdue
payments.payment_method	transfer · cash · check
payments.status	pending_review · confirmed · rejected