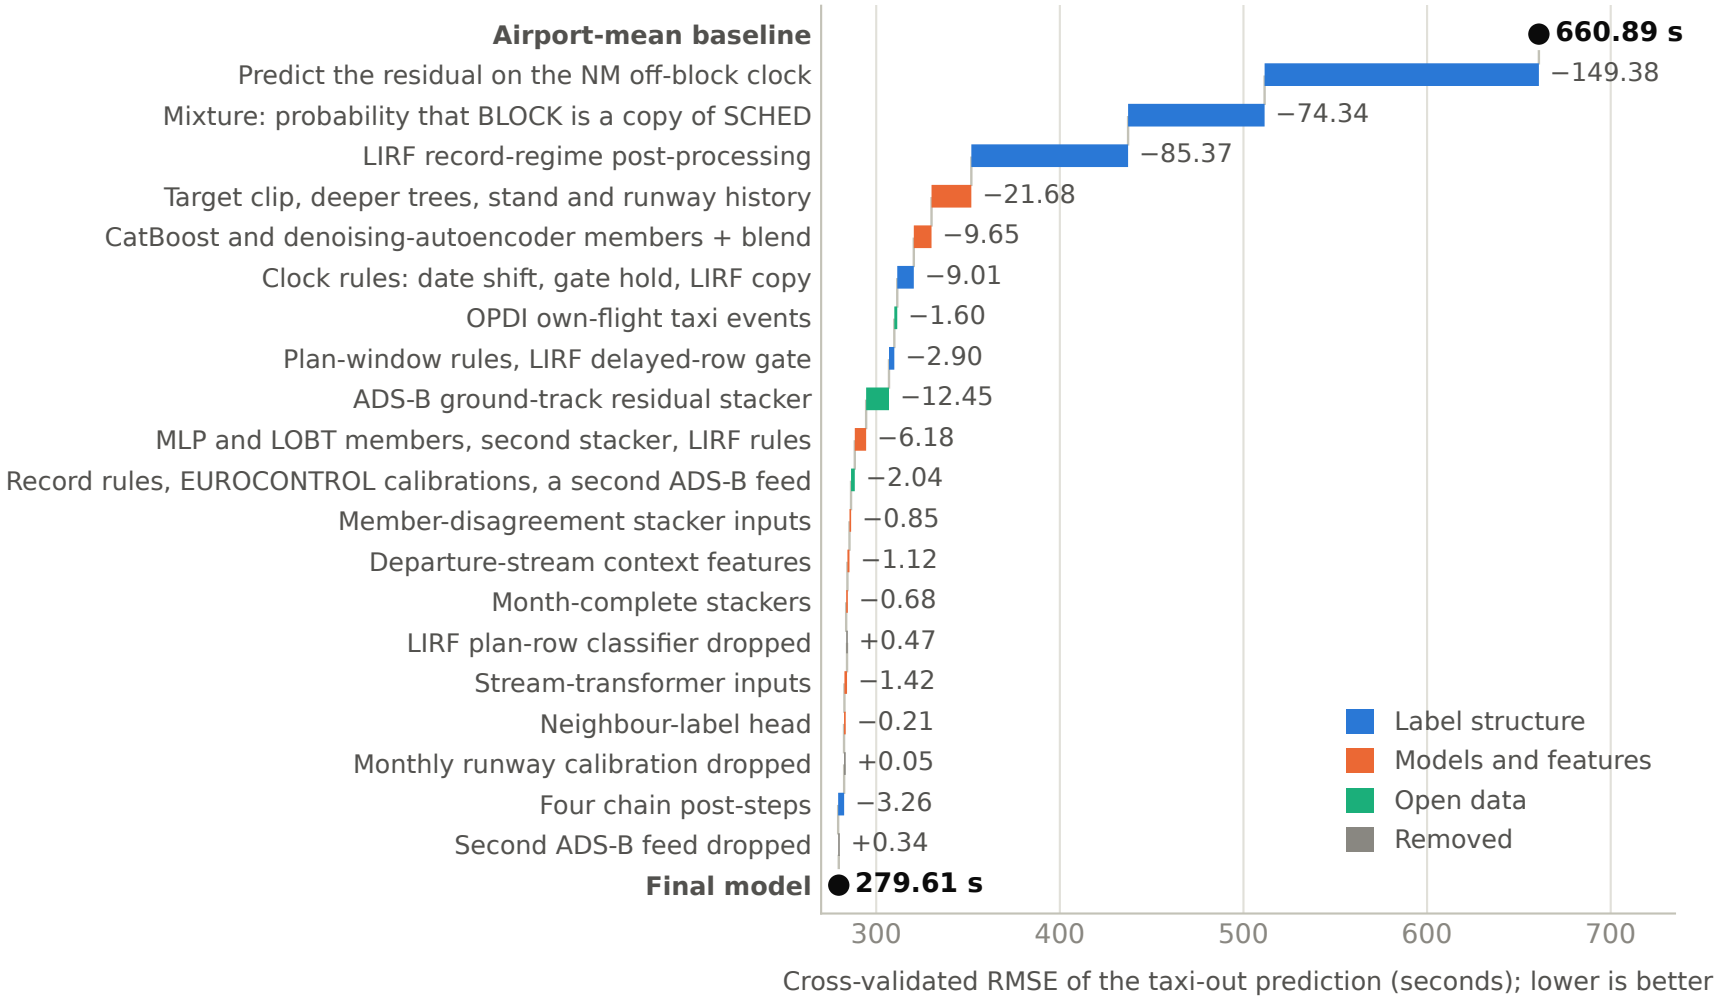
Airport-mean baseline
660.89 s
Predict the residual on the NM off-block clock
−149.38
Mixture: probability that BLOCK is a copy of SCHED
−74.34
LIRF record-regime post-processing
−85.37
Target clip, deeper trees, stand and runway history
−21.68
CatBoost and denoising-autoencoder members + blend
−9.65
Clock rules: date shift, gate hold, LIRF copy
−9.01
OPDI own-flight taxi events
−1.60
Plan-window rules, LIRF delayed-row gate
−2.90
ADS-B ground-track residual stacker
−12.45
MLP and LOBT members, second stacker, LIRF rules
−6.18
Record rules, EUROCONTROL calibrations, a second ADS-B feed
−2.04
Member-disagreement stacker inputs
−0.85
Departure-stream context features
−1.12
Month-complete stackers
−0.68
LIRF plan-row classifier dropped
+0.47
Stream-transformer inputs
−1.42
Neighbour-label head
−0.21
Monthly runway calibration dropped
+0.05
Four chain post-steps
−3.26
Second ADS-B feed dropped
+0.34
Final model
279.61 s
Label structure
Models and features
Open data
Removed
300
400
500
600
700
Cross-validated RMSE of the taxi-out prediction (seconds); lower is better