

Copilot is just a fancy Autocomplete...



Tine Starič


Software Architect @ Companial



Microsoft®
Most Valuable
Professional

How it all started

days of uk knowledge 2025

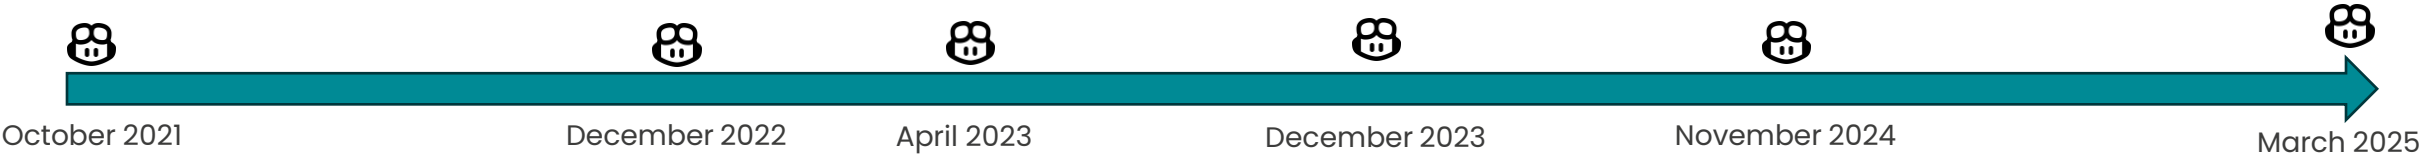



Developer

Initial release

Stable release

Operating system

Website

```
// function for parsing field
// the string looks like this
// field(2; Name; Text[2048])
// {
//     Caption = 'Name';
// }
function parseFieldName(text: string):
```

macOS, Web

copilot.github.com

5 Apr



Git

3 December 2023



Refund from GitHub

07:40

+1,33 \$

December 29, 2023

ations vienna

emea 2024


ber 6-8 | Vienna, Austria



days of uk knowledge 2025

how ai works

days of uk
knowledge 2025

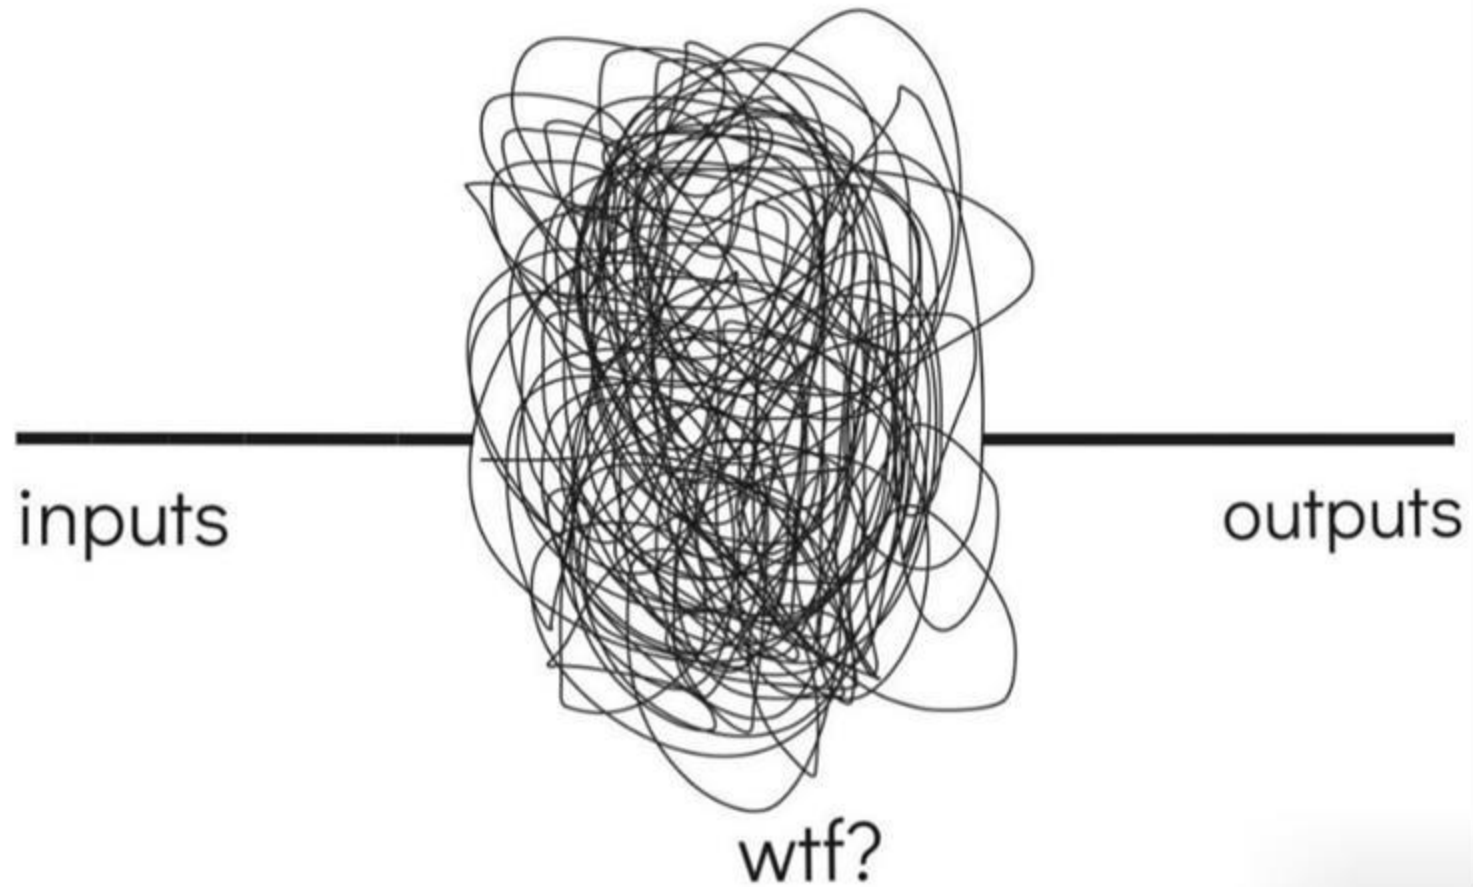

1 reference

```
local procedure GetAccessToken(): Boolean
var
    HttpClient: HttpClient;
    HttpContent: HttpContent;
    HttpResponseMessage: HttpResponseMessage;
    HttpHeaders: HttpHeaders;
    RequestUrl: Text;
    RequestBody: Text;
    ResponseText: Text;
    JResponse: JsonObject;
    JToken: JsonToken;
    ExpiresIn: Integer;
begin
    // Create the token request URL
    RequestUrl := StrSubstNo('https://login.windows.net/%1', StorageAccountName);

    // Create the request body
    RequestBody := 'grant_type=client_credentials&client_id=%1&client_secret=%2&scope=https://storage.azure.com/.default';
    RequestBody += StrSubstNo('&client_id=%1&client_secret=%2&scope=https://storage.azure.com/.default', ClientId, ClientSecret);
    RequestBody += 'scope=https://storage.azure.com/.default';

    // Set the content
    HttpContent.WriteFrom(RequestBody);

    // Set content-type header
    if HttpContent.GetHeaders(HttpHeaders) then
        HttpHeaders.Remove('Content-Type');
        HttpHeaders.Add('Content-Type', 'application/json');
    end;

    // Send the POST request
    if not HttpClient.Post(RequestUrl, HttpContent, HttpResponseMessage) then
        exit(false);
    end;
```

0 references

```
procedure ListBlobs(Prefix: Text; var BlobNames: List of [Text]): Boolean
var
    HttpClient: HttpClient;
    HttpResponseMessage: HttpResponseMessage;
    Uri: Text;
    AuthHeader: Text;
    ResponseText: Text;
    XmlDoc: XmlDocument;
    BlobsNode: XmlNodeList;
    BlobNode: XmlNode;
    i: Integer;
    NameNode: XmlNode;
begin
    // Clear the output list
    Clear(BlobNames);

    // Ensure we have a valid token
    if not EnsureAccessToken() then
        exit(false);
    end;

    // Build the URL to list blobs
    Uri := StrSubstNo('https://%1.blob.core.windows.net/%2/%3', StorageAccountName, Prefix, '');

    // Set authorization header
    AuthHeader := 'Bearer ' + AccessToken;
    HttpClient.DefaultRequestHeaders.Authorization := AuthHeader;

    // Make the GET request to list blobs
    if not HttpClient.Get(Uri, HttpResponseMessage) then
        exit(false);
    end;

    // Check if the request was successful
    if not HttpResponseMessage.IsSuccessStatusCode then
        exit(false);
    end;

    // Get the content as XML
    XmlDoc := XmlDocument.Parse(XmlDoc, true);
    BlobsNode := XmlDoc.DocumentElement.ChildNodes;
    for i in 1 to BlobsNode.Count do
        BlobNode := BlobsNode[i];
        NameNode := BlobNode.FirstChild;
        BlobNames.Add(NameNode.InnerText);
    end;
```

0 references

```
procedure PutFile(BlobName: Text; SourceInStream: InStream; ContentType: Text)
var
    HttpClient: HttpClient;
    HttpContent: HttpContent;
    HttpResponseMessage: HttpResponseMessage;
    HttpHeaders: HttpHeaders;
    Uri: Text;
    AuthHeader: Text;
begin
    // Ensure we have a valid token
    if not EnsureAccessToken() then
        exit(false);
    end;

    // Build the URL to the blob
    Uri := StrSubstNo('https://%1.blob.core.windows.net/%2/%3', StorageAccountName, Prefix, BlobName);

    // Set the content from InStream
    HttpContent.WriteFrom(SourceInStream);

    // Set the content type
    if HttpContent.GetHeaders(HttpHeaders) then
        HttpHeaders.Remove('Content-Type');
        HttpHeaders.Add('Content-Type', ContentType);
    end;

    // Set authorization header
    AuthHeader := 'Bearer ' + AccessToken;
    HttpClient.DefaultRequestHeaders.Authorization := AuthHeader;

    // Make the PUT request to upload the blob
    if not HttpClient.Put(Uri, HttpContent, HttpResponseMessage) then
        exit(false);
    end;
```

Project background



```
! reference
local procedure GetFileFromABS()
var
    ABSBlobClient: Codeunit "ABS Blob Client";
    InStr: InStream;
begin
    ABSBlobClient.Initialize('SimpleBlob', 'Documents', CreateAuth());
    ABSBlobClient.GetBlobAsStream('Demo.txt', InStr);
end;
```

Project background

```
1 {  
2   "stock": [  
3     {  
4       "locationId": "guid01",  
5       "skuId": "guid01",  
6       "stockDateTime": "2023-12-08",  
7       "quantity": 10  
8     }  
9   ]  
10 }
```


```
1 reference  
local procedure CollectAndMapStocksWithWairApi(var Stock: Record "Stock WAI"; var StockWRS: Record "Stock WRS")  
begin  
    if Stock.FindSet() then  
        repeat  
            StockWRS.Init();  
            StockWRS."Location Id" := GetLocationIdByLocationCode(Stock."Location Code");  
            StockWRS."Stock Keeping Unit Id" := Stock."Stock Keeping Unit Id";  
            StockWRS."Stock DateTime" := Stock."Stock DateTime";  
            StockWRS.Quantity := Stock.Quantity;  
            StockWRS.Insert(true);  
        until Stock.Next() = 0;  
    end;
```

```
3 references  
internal procedure SendStocksToWair(var Stock: Record "Stock WAI")  
var  
    StockWRS: Record "Stock WRS";  
    StockApiHandlerWRS: Codeunit "Stock Api Handler WRS";  
begin  
    CollectAndMapStocksWithWairApi(Stock, StockWRS);  
    if not StockApiHandlerWRS.Send(StockWRS) then  
        Error(ErrorMessage);  
end;
```

Autocomplete





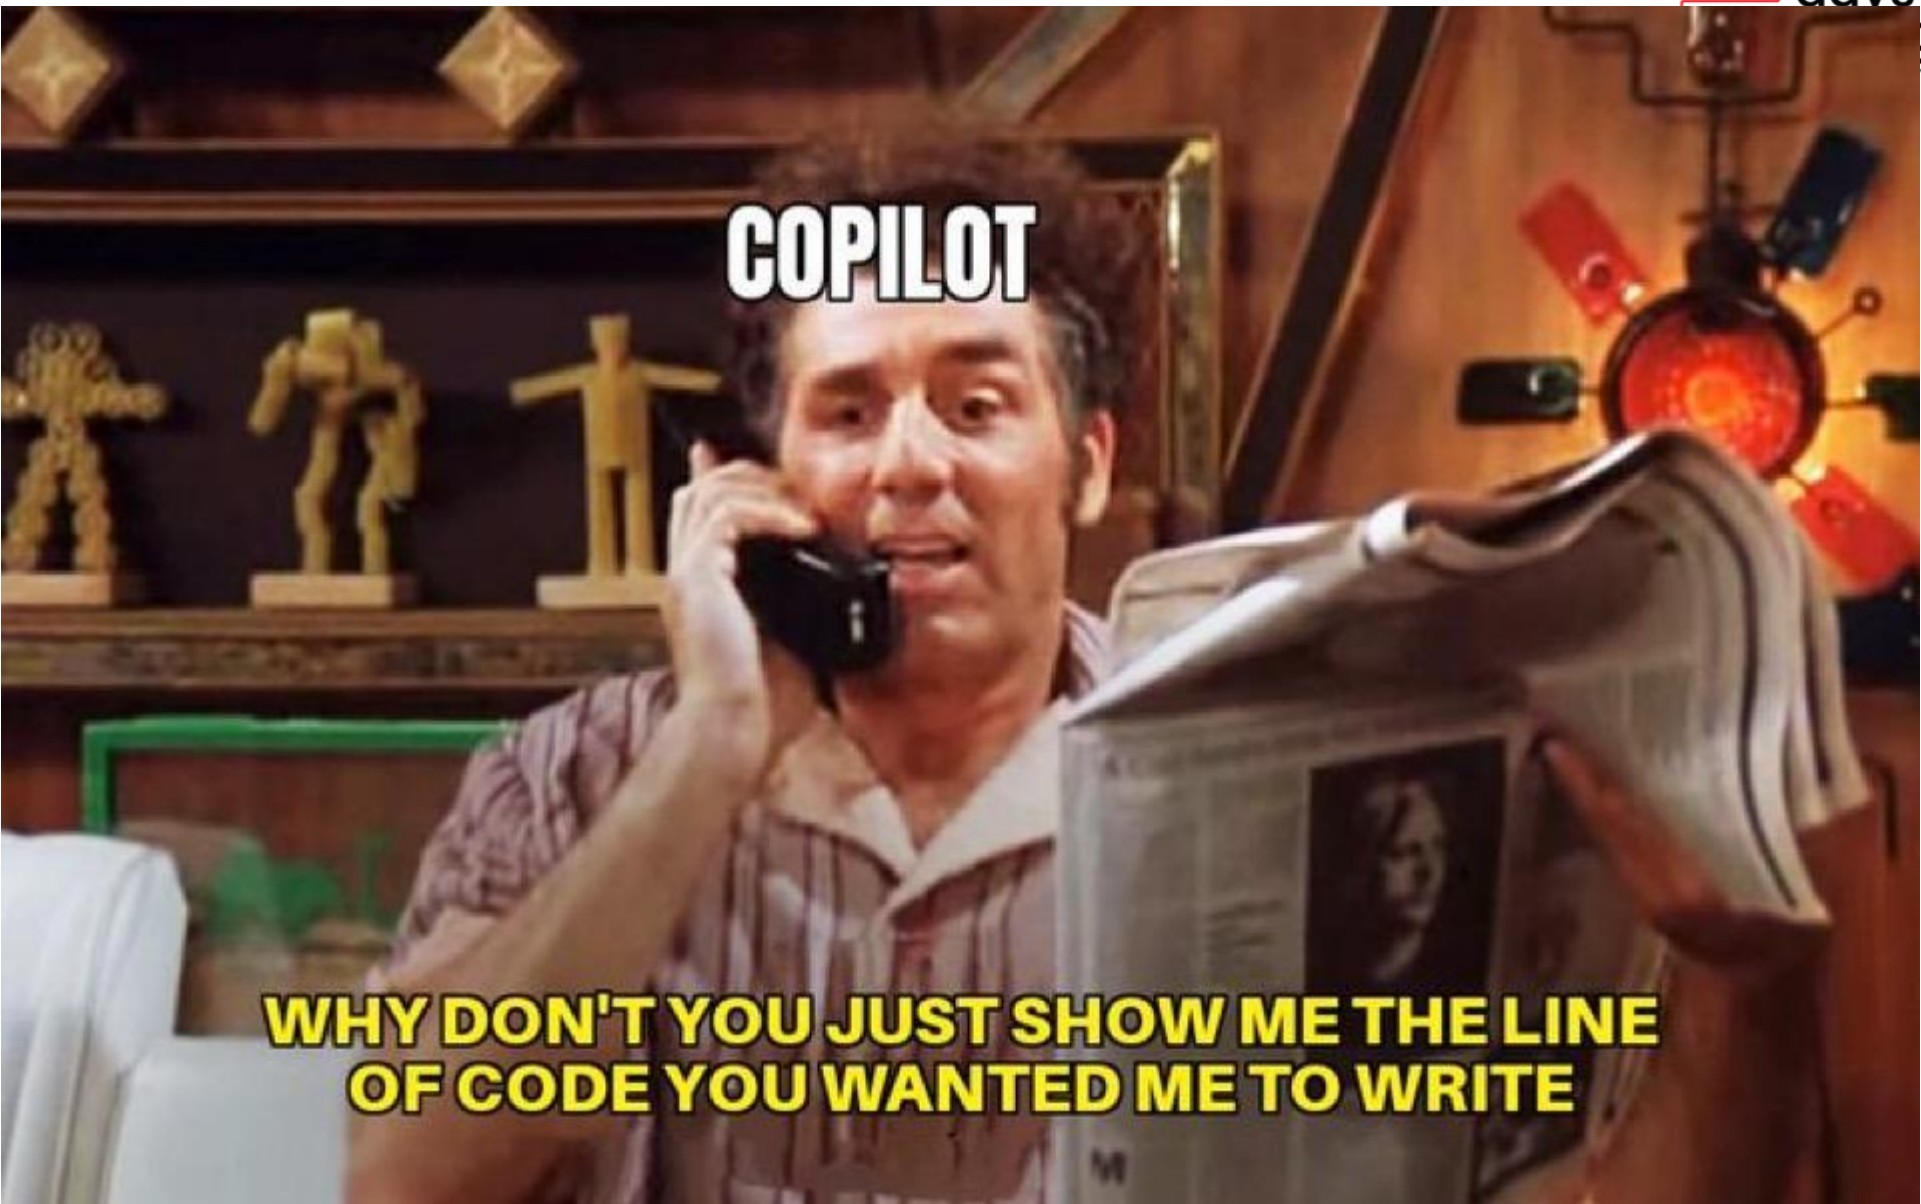

COPILOT

**WHY DON'T YOU JUST SHOW ME THE LINE
OF CODE YOU WANTED ME TO WRITE**

Models




Good for Chat

Models



Good for Chat




Good for Coding

Visit for a review


Models



Good for Chat



Good for Coding




Good for Research


Models



Good for Chat



Good for Coding



Good for Research



Good Morning




kitze 🚀
@thekitze

Follow

one of the key things to prompting cursor and ai in general is to know the limits and not to get too greedy.

one certain step at a time is better than trying to do 5 which are 99.9% gonna fail

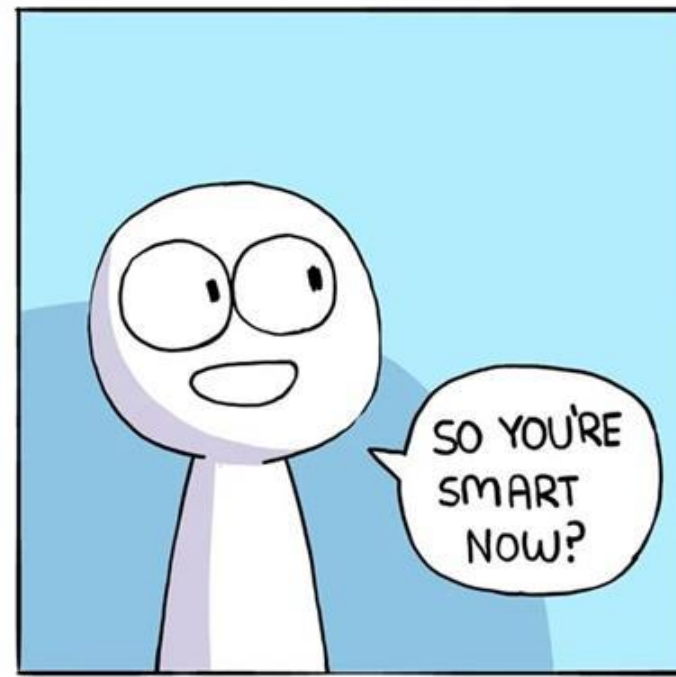

days of uk
knowledge 2025

↻ Reposted by Pi



Rob Bowley @robbowley.net · 4h

People aren't drawn to software development because they like writing code, it's because they love solving problems.

Code is the medium.

The real gratification comes from how quickly you can bring ideas to life and see the results.

💬 15

↻ 22

❤️ 193



Give us Feedback!

Find me on:

- X & Bsky: @TineStaric
- LinkedIn: /tinstaric
- Blog: tine.staric.net
- Email: tine.staric@companial.com

Reach out with questions!

Thank you!

