

How to Generate an OAuth 2.0 Token in Postman


1. Choose Authorization Type

- In Postman, open your request.
- Go to the **Authorization** tab.
- Set **Type** to **OAuth 2.0**.

2. Configure a New Token

Under **Configure New Token**, fill in the following:

- **Grant Type:** **Client Credentials**
- **Access Token URL:** Enter the token endpoint provided by your API/identity provider.
 - **UAT Access Token URL**=<https://api-gateway.mms.mckesson.com/oauth2/token>
- **Client ID:** Use the client ID generated from **API portal**.
- **Client Secret:** Use the client secret generated from **API portal**.
- **Scope:** **sandbox** (or whatever scope your API requires)
 - **i** if the Client ID and Secret is generated for Sandbox then the scope has to be **sandbox** vice versa for production (Live API) use the scope as **invoice,order,patient** . if the scope is not matching the generated client ID and Secret the Authentication will fail.
- **Client Authentication:** Select **Send as Basic Auth Header**

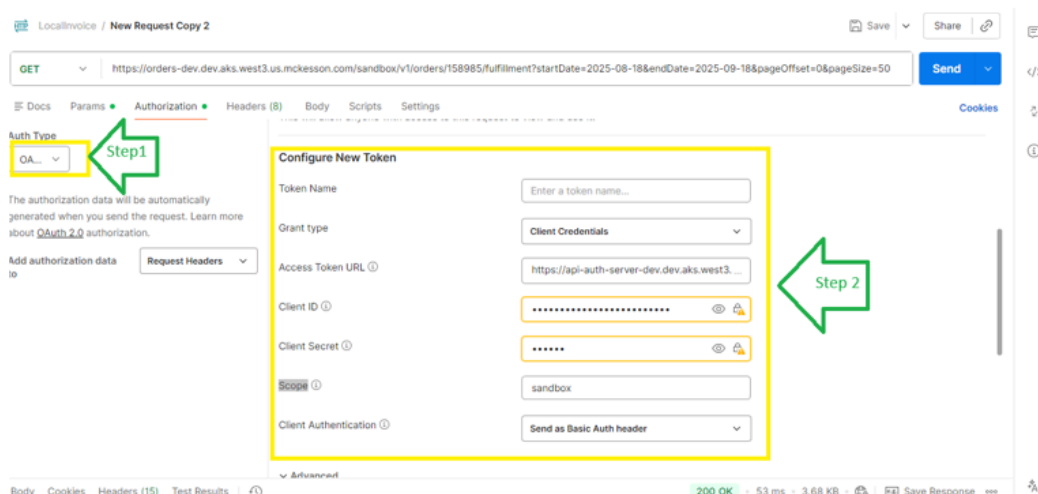

3. Generate and Use the Token

- Scroll down and click **Get New Access Token**.
- A popup will appear showing the generated token.
- Click **Use Token**.

- Now hit **Send** on your request to call the API with the token attached.

