

# News Headline Grouping As A Challenging NLU Task

Anonymous NAACL-HLT 2021 submission

## Abstract

With the help of Transformer-based architectures, Natural Language Understanding (NLU) systems have recently surpassed human performance on many standard tasks. For example, in the General Language Understanding Evaluation (GLUE) benchmark, human baselines are outperformed in six of the ten tasks. These impressive results have led the community to introspect on dataset limitations, and iterate on more nuanced challenges. In this paper, we introduce the task of HeadLine Grouping (HLG) and a corresponding dataset consisting of 20,056 pairs of news headlines, each labeled with a binary judgement as to whether the pair belongs within the same group. On HLG, human annotators achieve high performance of around 0.9 F-1, while current state-of-the-art Transformer models only reach 0.75 F-1, opening the path for further improvements. We further propose a novel unsupervised Headline Generator Swap model for the task of Headline Grouping that achieves within 3 F-1 of the best supervised model.

## 1 Introduction

Headlines are a key component in everyday news consumption. The first piece of text the user interacts with when learning about a story, the headline can play many roles, including: summarize the main points of the story, promote a particular detail, attract the reader's eye, and convince the reader to choose one source over another (Bonyadi and Samuel, 2013).

News aggregators amass content from many disparate news sources and have become popular, in part because they offer news readers access to high-quality, diverse sources (Chowdhury and Landoni, 2006). Flaxman et al. (2016) find that news aggregators help news readers access content they are unfamiliar with, and potentially on opposite sides of the political spectrum. At the heart of a news aggregator is the ability to group relevant con-





Date	Headline	Group
03/27	 Russian-U.S. crew makes belated arrival at space station	A
03/28	 Russian spacecraft brings 3-man crew to ISS after 2-day delay	A
03/29	 Space 'makes the heart grow rounder'	B
04/01	 Astronauts' hearts become spherical during prolonged trips in space, study finds	B

Figure 1: **Snippet of timeline in the Headline Grouping dataset (HLG).** The headlines are part of the Space timeline, one of 10 timelines in HLG. Headlines labeled A are part of a group, as are those labeled B.

tent together, to support a reader in finding varying views and angles on the news.

Natural Language Understanding (NLU) has seen rapid progress in recent years. The creation of multi-task benchmarks such as the General Language Understanding Evaluation collection (GLUE), paired with fast-paced progress in Transformer-based architectures has led to models outperforming human baseline performance on many tasks, such as paraphrase identification (Dolan et al., 2004), semantic similarity (Cer et al., 2017), and extractive question-answering (QA) (Rajpurkar et al., 2016).

This success has led to the questioning of the composition of benchmarks, and the subsequent creation of ever-more challenging datasets, for example by increasing the diversity of texts in textual entailment datasets (Williams et al., 2018), or introducing unanswerable questions in QA datasets (Rajpurkar et al., 2018).

### 1.1 Headline Grouping Definition

In this paper, we propose the novel task of Headline Grouping. Although news articles may discuss several topics, because of length constraints, headlines predominantly describe a single event. Therefore, for the task of headline grouping, we define two headlines to be in the same group if they describe the same event: an action that occurred at a specific

time and place. We do not require headlines to contain fully identical information. For example, one headline might report an exact number of deaths, while another might report a rounded number, or omit the number altogether. Figure 1 shows an example from our dataset. The first two headlines are in group A, and the third and fourth are part of group B. The headlines are divided into groups A versus B because they describe different events in the timeline (astronauts arriving at the space station vs. a study about hearts in space). The two headlines in B show the lexical and syntactic diversity of groups in this dataset – they appear in the same group because they describe the same underlying event. Appendix D gives a longer excerpt.

We build a large dataset for the task of Headline Grouping, crowd-sourcing the annotation of large timelines of news headlines. We cast the task as a binary classification: given a pair of headlines, determine whether they are part of a headline group (1) or whether they relate to distinct events (0).

## 1.2 Contributions

Our main contribution, described in Section 3, is the design of the Headline Grouping task, and the creation of a dataset called HeadLine Grouping (HLG) that is focused on detecting when headlines refer to the same underlying event. We show that the human annotations in our dataset have strong inter-annotator agreement (average 0.81), and a human annotator can achieve high performance on our corpus (around 0.9 F-1), while current state-of-the-art NLU technology stands around 0.75 F-1.

A second contribution is a novel unsupervised approach for the task of Headline Grouping relying on modifying a headline generator model. The model achieves the best performance on HLG amongst unsupervised methods. Section 4 presents the performance of this algorithm compared to several baselines, including supervised and unsupervised methods.

Our final contribution, presented in Section 5, is an analysis of the consistency of the best performing model on HLG. We specifically analyze whether the model follows commutative and transitive behavior expected to be trivially true in Headline Grouping.

## 2 Related Work

**Paraphrase Identification, Textual Entailment and Semantic Similarity** are three common NLP

tasks that resemble Headline Grouping. In Paraphrase Identification (PI) (Eyecioğlu Ozmutlu, 2016; Xu et al., 2014), the objective is to determine whether two sentences are semantically equivalent. We show in Table 2 that only one third of positive headline pairs in HLG qualify as paraphrases. We further show in Section 4 that a trained model on MRPC (Dolan et al., 2004), a PI dataset of news text, performs poorly on HLG. Textual entailment (Bentivogli et al., 2009), or Natural Language Inference (NLI) (Williams et al., 2018), determines whether a premise text implies a hypothesis. Apart from the non-symmetry of the entailment relationship, we believe entailment is not well-suited to the domain of headlines because of the strict nature of the relationship. A large portion of headlines in a group differ in level of detail, and under an entailment task, would need to be labeled as neutral or contradicting. Finally, Semantic similarity attributes a strength of similarity between two candidate sentences, for example in the Semantic Textual Similarity Benchmark (STS-B) (Cer et al., 2017), similarity is ranked from 1 to 5. This flexibility seems like a good fit; however, the lexical and syntactic diversity of headlines about the same underlying content do not correspond well to a similarity range.

**Topic Detection and Tracking (TDT)** (Allan, 2002) was a DARPA-sponsored initiative to investigate methods to group news articles by topics (referred to as timelines in this paper). We view TDT as a precursor to the task of Headline Grouping: in TDT, the focus is on detecting and tracking a timeline of related events, while in Headline Grouping, the timeline is given, and the focus is on subdividing it into finer groups. We considered using the TDT datasets and annotating them for our purposes. However, the TDT developers acknowledge (Graff et al., 2006) several important errors in the way the TDT datasets were acquired (e.g., some publication dates were not properly attributed) that could have an impact on the quality of the final dataset.

**News Headlines in NLP.** Headlines are popular as a challenging source for generation tasks such as summarization (Rush et al., 2015), style transfer (Jin et al., 2020), and style-preserving translation (Joshi et al., 2013). Headlines have been leveraged to detect political bias (Gangula et al., 2019), clickbait and fake news phenomena (Bourgonje et al., 2017). Finally, sentiment analysis of headlines has received attention (Bostan et al., 2020), with some

Story Name	Size	Groups	+ pairs	IAA
Tunisia Protests	111	46	219	0.758
Ireland Abortion Vote	180	81	406	0.727
Ivory Coast Army Mutiny	128	45	329	0.781
International Space Station	257	107	499	0.831
US Bird Flu Outbreak	79	36	91	0.924
Human Cloning	119	55	259	0.830
Facebook Privacy Scandal	194	105	274	0.753
Equifax Breach	159	81	261	0.855
Brazil Dam Disaster	273	132	634	0.818
Wikileaks Trials	180	101	550	0.859
<b>Total</b>	<b>1679</b>	<b>789</b>	<b>3522</b>	<b>0.814</b>

Table 1: **Names and statistics of the ten news timelines in HLG.** *Size* is the number of headlines in the timeline, *Groups* the number of distinct headline groups, *+ pairs* the number of pairs of headlines in all groups, and *IAA* the inter-annotator agreement. Timelines are separated into training (1-6), development (7-8), and test (9-10).

work showing headline sentiment can be a useful signal in finance (Moore and Rayson, 2017).

**Grouping Headlines** has been explored in prior work. Wubben et al. (2009) propose a TF-IDF based clustering algorithm, but do not evaluate its agreement with human annotations. Pronoza et al. (2015) build a corpus of Russian headlines pairs, but limit pairs in the dataset by filtering out headlines that are distant syntactically. We find that headline groups often contain syntactically distant headlines (see Figure 3). Bouamor et al. (2012) and Shinyama et al. (2002) present a simple strategy, relying on the assumption that all articles on a topic published on the same day form a group. As will be shown below, this assumption is not always correct (see Figure 2).

### 3 Headline Grouping Dataset

We now present the Headline Grouping Dataset. We describe the dataset of news articles we collected for annotation, our annotation procedure, an analysis of the resulting dataset, and the challenges we propose to the community.

#### 3.1 Dataset Source

We collect a set of 10 news timelines from an existing open-source news collection (Laban and Hearst, 2017). A timeline is a collection of news articles about an evolving topic, consisting of a series of events. The timelines we use to build HLG consist of time-stamped English news articles originating from 34 international news sources. The timelines range in size from 80 to 274 news articles, and span 18 days to 10 years.

We choose to use timelines as the source for the dataset for two reasons. First, news timelines center around a theme, and as successive events occur, many pairs of headlines will be semantically close, yielding challenging samples for the dataset. Second, this task requires annotating headlines by pairs. If there are  $n$  headlines, there could be on the order of  $n^2$  headline pairs to annotate. By having annotators assign group labels to a chronologically organized timeline, the annotation procedure requires only one label per headline, or  $n$  labels total.

We attempted to diversify topics and geographical locations represented in the 10 selected timelines. Topics and statistics are shown in Table 1.

#### 3.2 Annotation Procedure

To reduce the effects of varying judgement inherent to the task, annotations were obtained from five independent judges and merged using the procedure described in the following subsection. Annotators worked on an entire timeline at a time, using the following procedure:

- The timeline was presented in a spreadsheet, in chronological order, with a single headline per row, and the corresponding publication date (year, month, day),
- Annotators went over the timeline one headline at a time in chronological order,
- If the headline being annotated does not match a previously created group, the annotator assigns it a new *group number*,
- Otherwise, the annotator can assign the headline to a previous *group number*, grouping it to previously added headlines.

Roughly one fifth of the annotations were produced by authors of the paper, and the remaining annotations were obtained by recruiting 8 crowdworkers on the Upwork platform.<sup>1</sup> The crowdworkers were all native English speakers with experience in either proof-reading or data-entry, and were remunerated at \$14/hour. Annotators were first trained by reading a previously annotated timeline, and given the opportunity to clarify the task before starting to annotate. Exact instructions given to the annotators are transcribed in Appendix A.

#### 3.3 Merging Annotations

In order to merge the five annotations, we follow a standard procedure to produce a single grouping

<sup>1</sup><https://www.upwork.com>

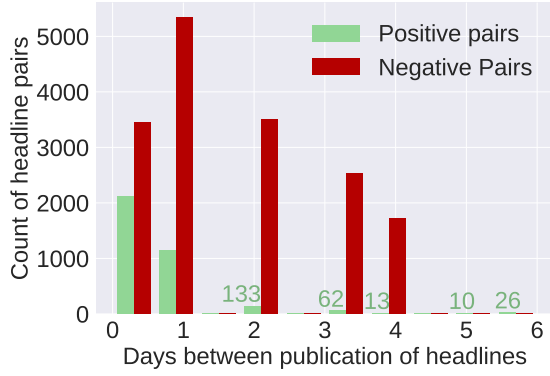


Figure 2: **Histogram of difference in publication dates of positive and negative pairs in final dataset.** Most positive headline pairs are published on the same day or within one day of each other. We down-sample negative pairs to only keep headlines published within 4 days of each other.

that represents an aggregate of annotations.

We create a graph  $G$ , with each headline in a timeline represented by a node  $n_i$ . An edge  $(n_i, n_j)$  is added to  $G$  if a majority of the annotators (three or more of the five) put the two headlines in the same group. We apply a community detection algorithm, the Louvain method (Blondel et al., 2008), to  $G$  to obtain a grouping of the headlines that we call the *global groups*.

### 3.4 Inter-annotator Agreement

We compare the groups of each annotator to the global groups for each timeline, and measure agreement between annotator groups and a leave-one-out version of the *global groups* using the standard Adjusted Mutual Information (Vinh et al., 2010). The average inter-annotator agreement is 0.814, confirming that consensus amongst annotators is high. Inter-annotator agreement is reported for each timeline in Table 1.

Section 4 provides individual annotator performance on HLG, which obtain the highest performance of about 0.9 F-1, further confirming that the task is well defined for human annotators.

### 3.5 Creating the Final Dataset

We transform the global groups into a binary classification task by generating pairs of headlines in the timelines: labeling the pair with a 1 if it belongs to the same group, and 0 otherwise.

With this procedure, we obtain 3522 distinct positive headline pairs, and 154156 negative pairs. This class imbalance is expected: two headlines

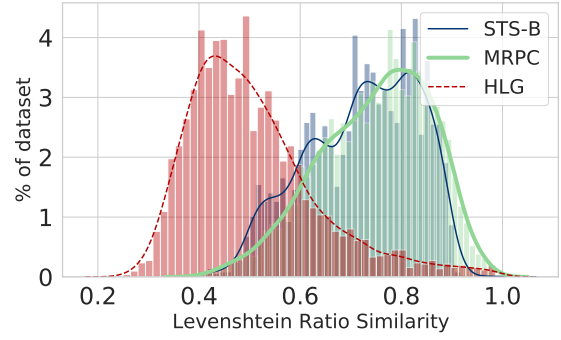


Figure 3: **Levenshtein Similarity Distribution for positive pairs in MRPC, SST-B and HLG.** Pairs of sentences in HLG can be positive examples (i.e., in the same group) while being less syntactically similar than in other NLU datasets such as STS-B or MRPC.

picked at random in a timeline are unlikely to be in the same group. In order to reduce class imbalance, we down-sample negative pairs in the dataset.

Figure 2 shows the distribution of differences in publication dates for pairs of headlines in the final dataset. Publication date is indeed a strong signal to determine whether headlines are in the same group, as most positive pairs are published on the same day or one day apart. However, we show in Section 4 that using time as a sole indicator is not enough to perform well on the dataset.

In Figure 2, it can also be observed that 98% of positive headline pairs are published within 4 days of each other. Therefore, we only retain negative pairs that are within a 4 day window, filtering out simpler negative pairs from the final dataset. This final dataset has a class imbalance of roughly 1 positive pair to 5 negative pairs, for a total of 20,056 of labeled headline pairs. This is similar in size to other NLU datasets, such as MRPC (5,801 samples), or STS-B (8,628 samples).

Figure 3 shows the distribution of Levenshtein Ratio (Levenshtein, 1966) defined as:

$$Ratio(S_1, S_2) = 1 - \frac{Levenshtein(S_1, S_2)}{\max(|S_1|, |S_2|)} \quad (1)$$

for positive pairs  $(S_1, S_2)$  in MRPC and STS-B, two common NLU datasets, as well as HLG, computed at the character level. The average similarity in HLG (0.51) is lower than in the two others (0.72 and 0.74, respectively). Furthermore, a classifier using solely the Levenshtein Ratio obtains an F-1 score of 0.81 on MRPC, but only 0.485 on HLG. This suggests lexical distance alone does not contain a strong signal for good performance on HLG.



Positive Examples			
Reasoning	Description	Example Headline Pair	Percentage
Difference in Detail	A headline conveys additional details, such as a name, or a cause	<i>NASA delays work on Moon rocket during virus pandemic</i> <i>Nasa's Moon plans take a hit</i>	37%
Exact Paraphrase	Both headlines convey the same information	<i>Equifax takes web page offline after reports of new cyber attack</i> <i>Equifax takes down web page after reports of new hack</i>	30%
Difference in Focus	Headlines focus on a different aspect of the event group	<i>Astronauts to Get Thanksgiving Feast in Space</i> <i>A Brief History of Thanksgiving Turkey in Space</i>	26%
Pun, Play-on-word, etc.	A headline has a unique stylistic element to attract readers	<i>New privacy law forces some U.S. media offline in Europe</i> <i>US websites blacked out in Europe on 'Happy GDPR Day'</i>	7%
Negative Examples			
Reasoning	Description	Example Headline Pair	Percentage
Independent events	Headlines describe two distinct events involving common actors	<i>Brazil dam disaster leaves 34 dead, hundreds missing</i> <i>Alert raised over imminent risk to another Brazil mining dam</i>	44%
Related Sub-events	Describing two events that are related, e.g., follow each other	<i>Irish abortion referendum voting opens</i> <i>Ireland set to end abortion ban as exit polls signal landslide vote</i>	36%
Headline too broad	One of the headlines is too broad to assign to a particular event	<i>Obama commutes Chelsea Manning sentence</i> <i>Who is Chelsea Manning? - video profile</i>	16%
Borderline / Noise	Could be positive or negative, based on interpretation		4%

Table 2: **Results of a manual typology of a subset of HLG.** An analysis of 200 positive, and 200 negative same-day headline pairs reveals there are several reasons why headlines get grouped or not in our dataset.

### 3.6 Analysis

To gain insight into the linguistic phenomena that occur within and outside headline groups, the first author manually inspected 200 positive and 200 negative headline pairs in HLG. Positive pairs were selected from randomly sampled large groups, and negative samples from same-day negative pairs, because headlines that appear on the same day but are not in the same group cannot be distinguished using time information and are likely to overlap semantically the most. In Table 2, we list the phenomena we observed, give an example for each, and show the frequency in our sample. Within a group, headlines can be exact paraphrases, differ in detail level, differ in the element of focus, or involve stylistic elements such as puns. Negative headline pairs analyzed were either about independent events, related sub-events or involved a headline that was not specific enough. Additionally, around 4% of the negative samples analyzed were judged as borderline, interpretable as either positive or negative, showing that some ambiguity in the task is unavoidable. We believe this diversity in phenomena are ingredients that make Headline Grouping challenging and interesting for NLU research.

### 3.7 Challenges

To allow for diversity in approaches to Headline Grouping, we propose to sub-divide HLG into several challenges, limiting in each the data used to solve the classification task:

- **Challenge 1: Headline-only.** Access to the headline pairs only; similar to Paraphrase Identification and Textual Similarity tasks.
- **Challenge 2: Headline + Time.** Access to the headline pairs and their publication dates.
- **Challenge 3: Headline + Time + Other.** Access to the headline pairs, publication dates, and other information such as full content, author(s), and news source (a URL to the original article provides this access).

## 4 Results on the Challenges

In Table 3, we report the performance of human annotators and a baseline, as well as unsupervised and supervised methods on HLG. We chose Electra (Clark et al., 2019) for experiments based on a bi-directional Transformer (Vaswani et al., 2017), as initial experiments with other BERT (Devlin et al., 2019) variants performed similarly. Implementation details, model sizes and hyper-parameters are listed in Appendix B.

### 4.1 Human Performance and Baseline

**Human Annotator** reports the F-1 score of human annotators performing the task. Human performance is estimated by obtaining an additional set of annotations for each timeline in the development and testing set, not used for dataset creation. These annotations were completed after several hours of practice on the training set timelines.

Method	Challenge	HLG Dev F-1	HLG Test F-1
<b>Human Performance and Baseline</b>			
Human Annotator	2	<b>0.884</b>	<b>0.900</b>
Time-only	2	0.654	0.585
<b>Unsupervised / Zero-shot Models</b>			
Electra MRPC Zero-Shot	1	0.562	0.626
Electra MRPC Zero-Shot + Time	2	0.666	0.688
Headline Generator Swap	3	0.671	0.651
Headline Gen. Swap + Time	3	<b>0.727</b>	<b>0.722</b>
<b>Supervised Models</b>			
Electra Finetune on HLG	1	0.728	0.796
Electra Finetune on HLG content	3	0.652	0.723
Electra Finetune on HLG + Time	2	<b>0.753</b>	<b>0.828</b>

Table 3: **F-1 performance of several methods on the development and test portions of the Headline Grouping Dataset.** Methods are separated into baselines: (1) the performance of a human annotator, and performance using only publication date, (2) unsupervised or zero-shot methods, that do not leverage the training set for predictions, and (3) supervised methods. Each method falls under a challenge setting (I, II or III) based on data used.

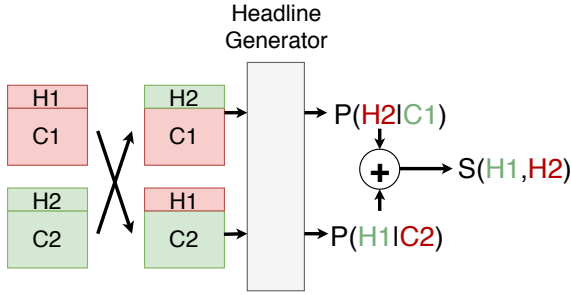


Figure 4: **Schematic of the Headline Generator Swap model.** We adapt a headline generator – a finetuned GPT-2 – to the task of Headline Grouping. The score of a pair of headlines is based on whether the generative model believes a swap of headlines is likely.

**Time only** reports the performance of a logistic regression baseline based on the difference in days of publication between the two headlines. Data plotted in Figure 2 shows that a majority of positive pairs are published within two days of each other.

## 4.2 Unsupervised Models

**Electra MRPC Zero-shot** stands for an Electra model trained on the Microsoft Paraphrase Corpus (MRPC), achieving an F-1 of 0.92 on its development set. The objective is to evaluate whether a competitive paraphrase identification system achieves high performance on HLG. The threshold to predict a label of one is tuned on the training portion of HLG. This model only accesses headlines, and falls under *Challenge 1*.

**Electra MRPC Zero-shot + Time** corresponds

to the previous model, adding publication time into the model in the following way:

$$P'(Y = 1|X) = P(Y = 1|X) \cdot e^{-\lambda\Delta T} \quad (2)$$

where  $X$  represents the pair of headline inputs,  $P(Y = 1|X)$  represents the model’s confidence of the headline pair being in the same group, and  $\Delta T$  the difference in days of publication of the headlines.  $\lambda$  is tuned on the training set. Because this method leverages headline and time information, it falls under *Challenge 2*.

**Headline Generator Swap** is a novel approach we propose for zero-shot headline grouping, summarized in Figure 4.

Transformer-based Language Models like GPT-2 (Radford et al., 2019) model the probability of a word sequences. As the first step in Headline Generator Swap, we use the GPT-2 model to create a headline generator to estimate the likelihood of a (headline, content) pair:  $P_{LM}(H|C)$ .

In more detail, we finetune a GPT-2 model to read through the first 512 words of a news article and generate its headline. The headline generator is trained with teacher-forcing supervision, and a large corpus of 6 million (content, headline) pairs (Laban and Hearst, 2017), not overlapping HLG.

The second step in Headline Generator swap is to use this probability to produce a symmetric score for two articles  $A_1 = (H_1, C_1)$  and  $A_2 = (H_2, C_2)$ :

$$S(A_1, A_2) = P_{LM}(H_2|C_1) + P_{LM}(H_1|C_2) \quad (3)$$

This score evaluates the likelihood of a swap of headlines between articles  $A_1$  and  $A_2$ , according to the GPT-2 language model. We argue that if the model believes a swap is likely, the headlines must be part of the same group. The threshold above which  $S(A_1, A_2)$  predicts a 1 is determined using the training portion of the data. Because this model uses the headline and content of the article, it falls under *Challenge 3*.

**Headline Gen. Swap + Time** corresponds to the Headline Generator Swap model, adding publication date information similarly to the *Electra MRPC Zero-shot + Time* model:

$$S'(A_1, A_2) = S(A_1, A_2) \cdot e^{-\lambda \Delta T} \quad (4)$$

This model uses the headline, publication data and content of the article, and falls under *Challenge 3*.

Unsupervised models were allowed to pick a single hyper-parameter based on training set performance: to learn the threshold in score differentiating between class 1 and class 0. Strictly speaking, because we tune this single parameter, the method could be seen as supervised. However, we label them as unsupervised because model parameters were not modified.

### 4.3 Supervised Methods

**Electra Finetune** stands for an Electra model finetuned on the training set of HLG, inputting the two headlines, divided by a separator token. Headline order is chosen randomly at each epoch. Because we train a model for several epochs (see Appendix B), a model is likely to see pairs in both orders. This model only uses headlines of articles for prediction, and falls under *Challenge 1*.

**Electra Finetune on content** represents a similar model to that described above, with the difference that the model makes predictions based on the first 255 words of the contents of the two news articles, instead of the headline. This evaluates the informativeness of contents in determining headline groups. This experiment requires the contents and falls under *Challenge 3*.

**Electra Finetune + Time** corresponds to an Electra model with time information. The model’s output goes through a 768x1 feed-forward layer, and is concatenated with the day difference of publication, which is run through a 2x2 feed-forward, and a softmax layer. This model uses headline and time information, and falls under *Challenge 2*.

### 4.4 Discussion of Results

Human performance can be high, close to 0.9 F-1 both on development and test timelines.

Using time alone gives a lower-bound baseline on HLG, achieving an F-1 of 0.585 on the test set, and confirming that publication date of an article is not enough to perform competitively on HLG.

Regarding Unsupervised and Zero-shot approaches, the *Headliner Generator Swap* outperforms *Electra MRPC Zero-shot*. With additional time information (+ *time*), the Generator-based model is able to get close to strong supervised models. The model benefits from pre-training on a large corpus of (content, headline) pairs, having learned a good representation for headlines.

Unsurprisingly, best performance on HLG is achieved by a supervised approach, *Electra Finetune HLG + Time*, which uses both headline and time information. With an F-1 performance on the development set of 0.753, the model is still 0.13 F-1 points below human performance (0.07 F-1 difference on the test set).

When finetuning the Electra model with contents instead of headlines, performance drops by 0.07 F-1 points. This is particularly surprising as it could be expected that content contains strictly more information than the headline. We interpret this performance of the content-based model as evidence that the contents are more broad and do not solely focus on the distinguishing fact that is necessary to perform the grouping.

Finally, publication date yields a performance gain of 0.025 to 0.1 F-1 points over models without time information. This confirms that even though time information alone does not achieve high performance, it can be used to enhance models effectively. Because human annotators read timelines chronologically and had access to publication date while annotating, we do not have an upper-bound of human performance without using time.

## 5 Analysis of Model Consistency

Checking whether deep-learning models are consistent across predictions has recently become a subject of interest, for example with QA systems with text (Ribeiro et al., 2019) and image (Shah et al., 2019) inputs. We analyze model consistency by probing the *Electra Finetune + Time* model, which achieves highest performance in terms of F-1 score. We propose a commutative test and transitive test, both illustrated in Figure 5.

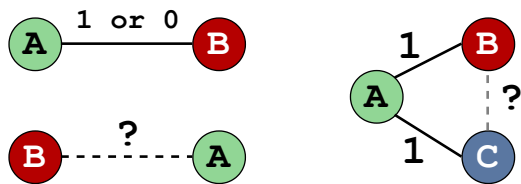


Figure 5: **Simplified representation of commutativity (left) and transitivity (right).** We verify whether predictions from our best-performing model are consistent with regards to these two properties.

## 5.1 Commutative Test

The Headline Grouping task requires two sentences to be compared, both playing a symmetric role.

Most model architectures process the headline pair as a single sequence, and an arbitrary ordering of the pair is chosen for processing. We study whether this arbitrary choice has an impact on the model’s prediction. Specifically, we make predictions for all pairs of headlines in the development portion of HLG, running each pair in both  $(A, B)$  and  $(B, A)$  order.

We find that for 12.6% of the pairs, swapping the order of headlines is enough to make the model change its prediction (put higher probability on 0 in one case and 1 in the other).

Furthermore, in other cases when the prediction does not change, the probability of the predicted class fluctuates by 0.11 on average, showing the impact sentence order has on all predictions.

A remedy is to build a symmetric classifier:

$$P_S(Y|A, B) = \frac{P(Y|A, B) + P(Y|B, A)}{2} \quad (5)$$

where  $P_S$  follows the symmetric rule by design, by predicting for both  $(H_1, H_2)$  and  $(H_2, H_1)$  and averaging. When applying this patch to models presented in Section 4, we observe an average gain in F-1 performance of 0.01. Even though encouraging, this gain is a post hoc fix, and enforcing symmetry during training might yield further gains.

## 5.2 Transitive Test

Transitivity involves triplets of headlines A, B and C. The assumption is that if A and B are part of the same group, and A and C are part of the same group, then B and C must be in the same group as well. The procedure followed during annotation — assigning group IDs to headlines — implies that the transitivity is preserved, as all pair of headlines within the same group are positive pairs.

To test a model’s consistency with regards to the transitive rule, we use the *Electra Finetune + Time* model to produce a prediction for all pairs of headlines in the development portion of HLG.

For each triplet  $(A, B, C)$  of headlines in the timeline, the model produces three predictions for the  $(A, B)$ ,  $(A, C)$ , and  $(B, C)$  pairs. We focus our attention on triplets where the model has predicted at least 2 positive pairs: if the third pair is predicted to be positive, transitivity is conserved (111 triangle), but if it is predicted to be negative, the triplet breaks the transitivity rule (110 triangle).

We find that out of the 72,172 triplets for which the model predicted at least 2 positives pairs, 53,495 triplets had a negative third prediction, and 18,677 had a positive one. In short, the model is consistent only 26% of the time on these triplets.

Improving model consistency with regards to transitivity is challenging, as it would involve presenting the model with triples in some way. Imposing this constraint could yield performance improvements on the task.

We note however that transitivity is a strong assumption, as it is possible for groups of headlines to have stronger and weaker subgroups. It is possible that human annotations would not always follow transitivity if tasked to do so. For this reason, we do not expect models to be 100% consistent, but there is room for improvement.

## 6 Conclusion

In this work we present the new task of HeadLine Grouping (HLG) a new challenging NLU task, with an accompanying dataset. Even though state-of-the-art NLU models have achieved close to human performance on many NLU tasks, we show that there is a considerable gap between best model performance (0.75 F-1) and human performance (about 0.9 F-1) on HLG. We therefore propose this dataset as a challenge for future NLU benchmarks. We propose to repurpose a Headline Generator for the task of headline PI, based on prompting it for the likelihood of a headline swap, and achieve within 3 F-1 of the best supervised model, paving the way for other unsupervised methods to repurpose generators for NLU. Analysis of models on HLG reveals that they are not consistent in trivial ways, suggesting further improvements needed to NLU models.



## References

- James Allan. 2002. Introduction to topic detection and tracking. In *Topic detection and tracking*, pages 1–16. Springer.
- L. Bentivogli, Peter Clark, I. Dagan, and Danilo Giampiccolo. 2009. The sixth pascal recognizing textual entailment challenge. In *TAC*.
- Vincent D Blondel, Jean-Loup Guillaume, Renaud Lambiotte, and Etienne Lefebvre. 2008. Fast unfolding of communities in large networks. *Journal of statistical mechanics: theory and experiment*, 2008(10):P10008.
- Alireza Bonyadi and Moses Samuel. 2013. Headlines in newspaper editorials: A contrastive study. *Sage Open*, 3(2):2158244013494863.
- Laura Ana Maria Bostan, E. Kim, and Roman Klinger. 2020. Goodnewseveryone: A corpus of news headlines annotated with emotions, semantic roles, and reader perception. *ArXiv*, abs/1912.03184.
- Houda Bouamor, Aurélien Max, and Anne Vilnat. 2012. Une étude en 3d de la paraphrase: types de corpus, langues et techniques (a study of paraphrase along 3 dimensions: Corpus types, languages and techniques)[in french]. In *Proceedings of the Joint Conference JEP-TALN-RECITAL 2012, volume 2: TALN*, pages 267–280.
- Peter Bourgonje, J. M. Schneider, and Georg Rehm. 2017. From clickbait to fake news detection: An approach based on detecting the stance of headlines to articles. In *NLPmJ@EMNLP*.
- Daniel Matthew Cer, Mona T. Diab, Eneko Agirre, I. Lopez-Gazpio, and Lucia Specia. 2017. Semeval-2017 task 1: Semantic textual similarity multilingual and crosslingual focused evaluation. *ArXiv*, abs/1708.00055.
- Sudatta Chowdhury and Monica Landoni. 2006. News aggregator services: user expectations and experience. *Online Information Review*.
- Kevin Clark, Minh-Thang Luong, Quoc V Le, and Christopher D Manning. 2019. Electra: Pre-training text encoders as discriminators rather than generators. In *International Conference on Learning Representations*.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. Bert: Pre-training of deep bidirectional transformers for language understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186.
- Bill Dolan, Chris Quirk, and Chris Brockett. 2004. *Unsupervised construction of large paraphrase corpora: Exploiting massively parallel news sources*. In *COLING 2004: Proceedings of the 20th International Conference on Computational Linguistics*, pages 350–356, Geneva, Switzerland. COLING.
- Asli Eyecioğlu Ozmutlu. 2016. *Paraphrase identification using knowledge-lean techniques*. Ph.D. thesis, University of Sussex.
- Seth Flaxman, Sharad Goel, and Justin M Rao. 2016. Filter bubbles, echo chambers, and online news consumption. *Public opinion quarterly*, 80(S1):298–320.
- Rama Rohit Reddy Gangula, Suma Reddy Duggenpudi, and R. Mamidi. 2019. Detecting political bias in news articles using headline attention. In *ACL 2019*.
- David Graff, Junbo Kong, Kazuaki Maeda, and Stephanie Strassel. 2006. Tdt5 multilingual text. Technical Report LDC2006T18, Linguistic Data Consortium, Philadelphia, PA.
- D. Jin, Zhijing Jin, Joey Tianyi Zhou, Lisa Orri, and Peter Szolovits. 2020. Hooks in the headline: Learning to generate headlines with controlled styles. *ArXiv*, abs/2004.01980.
- Aditya Joshi, Kashyap Papat, Shubham Gautam, and P. Bhattacharyya. 2013. Making headlines in hindi: Automatic english to hindi news headline translation. In *IJCNLP*.
- Philippe Laban and Marti A Hearst. 2017. newslens: building and visualizing long-ranging news stories. In *Proceedings of the Events and Stories in the News Workshop (ACL 2017)*, pages 1–9.
- Vladimir I. Levenshtein. 1966. Binary codes capable of correcting deletions, insertions and reversals. *Soviet physics. Doklady*, 10:707–710.
- A. Moore and Paul Rayson. 2017. Lancaster a at semeval-2017 task 5: Evaluation metrics matter: predicting sentiment from financial news headlines. *ArXiv*, abs/1705.00571.
- Ekaterina Pronoza, Elena Yagunova, and Anton Pronoza. 2015. Construction of a russian paraphrase corpus: unsupervised paraphrase extraction. In *Russian Summer School in Information Retrieval*, pages 146–157. Springer.
- Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, and Ilya Sutskever. 2019. Language models are unsupervised multitask learners.
- Pranav Rajpurkar, Robin Jia, and Percy Liang. 2018. Know what you don’t know: Unanswerable questions for squad. *ArXiv*, abs/1806.03822.
- Pranav Rajpurkar, Jian Zhang, Konstantin Lopyrev, and Percy Liang. 2016. Squad: 100, 000+ questions for machine comprehension of text. *ArXiv*, abs/1606.05250.

- Marco Tulio Ribeiro, Carlos Guestrin, and Sameer Singh. 2019. Are red roses red? evaluating consistency of question-answering models. In *ACL*.
- Alexander M. Rush, S. Chopra, and J. Weston. 2015. A neural attention model for abstractive sentence summarization. *ArXiv*, abs/1509.00685.
- Meet Shah, Xinlei Chen, Marcus Rohrbach, and Devi Parikh. 2019. Cycle-consistency for robust visual question answering. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 6649–6658.
- Yusuke Shinyama, Satoshi Sekine, and Kiyoshi Sudo. 2002. Automatic paraphrase acquisition from news articles. In *Proceedings of the second international conference on Human Language Technology Research*, pages 313–318. Morgan Kaufmann Publishers Inc.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. In *Advances in neural information processing systems*, pages 5998–6008.
- Nguyen Xuan Vinh, Julien Epps, and James Bailey. 2010. Information theoretic measures for clusterings comparison: Variants, properties, normalization and correction for chance. *The Journal of Machine Learning Research*, 11:2837–2854.
- Adina Williams, Nikita Nangia, and Samuel R. Bowman. 2018. A broad-coverage challenge corpus for sentence understanding through inference. *ArXiv*, abs/1704.05426.
- Sander Wubben, Antal Van Den Bosch, Emiel Krahmer, and Erwin Marsi. 2009. Clustering and matching headlines for automatic paraphrase acquisition. In *Proceedings of the 12th European Workshop on Natural Language Generation (ENLG 2009)*, pages 122–125.
- W. Xu, Alan Ritter, Chris Callison-Burch, W. Dolan, and Yangfeng Ji. 2014. Extracting lexically divergent paraphrases from twitter. *Transactions of the Association for Computational Linguistics*, 2:435–448.

## A Annotator Instructions

The wording of the prompt given to the eight crowd annotators we recruited was the following:

Your task will be to annotate News Headline timelines, and decide which are referring to the same event.

You are given a list of news headlines in chronological order, with a headline on each line of a Spreadsheet. For each headline, the task is to assign it a number: either a new number if the headline represents a new event that hasn't appeared yet, or the number of the existing headline it is a "repetition" of.

For each headline, you are also given a date of publication, which you can use to determine whether two headlines should be in the same event as well: two headlines several months apart must be about different events, even if they are very close lexically (protests in June and September are different events).

## B Model Size and Hyper-parameters

In order to ease reproducibility, we report relevant hyper-parameters of models whose results are present in Section 4. We used implementation of Transformer models from the HuggingFace Transformer library<sup>2</sup>. For Electra models, we initialized using the *electra-base-discriminator*. For GPT-2 based models, we initialized with the *gpt2* model (which corresponds to a base model as well). Additional model-specific details:

- **Electra MRPC Zero-shot:** The model produces a probability for label 1:  $P(Y = 1|X)$ . If this probability is above a threshold  $T$ , the model predicts a 1, and below it predicts a 0.  $T = 0.23$  for this model.
- **Electra MRPC Zero-shot + Time:** We use a time constant of  $\lambda = 0.15$ , and  $T = 0.14$  for this model.
- **Headline Generator Swap:** the threshold for this model is  $T = 0.0012$ . This might seem small, but it is the conditional probability of a headline according to the *GPT-2* model, and corresponds to a log-probability of  $-6.75$ .

- **Headline Gen. Swap + Time:** we use a time constant  $\lambda = 0.07$ , and a threshold of  $T = 0.00056$ , which corresponds to a log-probability of  $-7.49$ .
- **Supervised models:** All supervised models are trained for 3 epochs, with a batch size of 32, and the Adam Optimizer with a learning rate of  $LR = 10^{-5}$  with an exponential decay and a linear-warmup over the first 1000 steps. All weights of the model are finetuned.

## C HLG Format and Removal process

The dataset is a JSON file that can be processed using standard JSON parsing libraries. Each entry in the JSON object follows the schema:

```
{
  "headline_a": "...",
  "headline_b": "...",
  "day_a": "YYYY-MM-DD",
  "day_b": "YYYY-MM-DD",
  "source_a": "domain.com",
  "source_b": "domain.com",
  "authors_a": "...",
  "authors_b": "...",
  "url_a": "https://...",
  "url_b": "https://...",
  "cut": "...",
  //training/validation/testing
  "timeline": "",
  // name of timeline
  // headline pair belongs to
  "label": int,
  // 1 if paraphrase, 0 o/w
}
```

The dataset will include scripts for processing the url for accessing the full content of the articles and other article data and for an option for content owners to request removal.

## D Excerpt of Timeline

<sup>2</sup><https://github.com/huggingface/transformers>

Publication Date	Source	Headline	Group
2015-01-14	cnn	Astronauts relocate after false alarm	1
2015-01-14	bloomberg	Space Station Crew Returns After Alarm Scare Prompts Evacuation	1
2015-01-14	bloomberg	Space Station Crew Safe After Coolant-Pressure Alarm Sounds (1)	1
2015-01-14	foxnews	6 evacuate US part of space station; NASA says all are safe	1
2015-01-15	reuters	Astronauts back in U.S. part of space station after leak scare	1
2015-01-15	reuters	Crew evacuates U.S. section of space station after leak-agencies	1
2015-01-15	nytimes	Space Station Crew Temporarily Moves to Russian Side Over Fears of Ammonia Leak	1
2015-01-17	washingtonpost	A false alarm for crew on the International Space Station	1
2015-08-10	telegraph	Astronauts declare first space salad 'awesome'	2
2015-08-10	cnn	Space-grown vegetables: Astronauts chow down on lettuce	2
2015-08-10	foxnews	For the First Time Ever, NASA Astronauts Eat Vegetables Grown in Space	2
2015-08-10	foxnews	Space Station astronauts make history, eat first space-grown veggies	2
2015-08-10	businessinsider	First space-grown lettuce on the menu today for NASA astronauts	2
2015-08-11	nytimes	Growing Vegetables in Space, NASA Astronauts Tweet Their Lunch	2
2016-11-16	ap	NASA astronaut on verge of becoming oldest woman in space	3
2016-11-16	washingtonpost	Astronaut to become oldest woman to travel in space	3
2016-11-17	france24	Haute cuisine: top French chefs' food bound for space station	4
2016-11-17	ap	Rocket carrying crew of 3 blasts off for Int'l Space Station	5
2016-11-17	reuters	Multinational crew blasts off, bound for space station	5
2016-11-17	rt	New ISS crew sets off into space from Russian launchpad (LIVE)	5
2016-11-17	france24	Three astronauts blast off to ISS	5
2016-11-17	foxnews	Rocket carrying crew of 3 blasts off for International Space Station	5
2016-11-17	bbc	Peggy Whitson: Oldest woman in space blasts off to ISS	5
2016-11-18	telegraph	Nasa veteran Peggy Whitson becomes the oldest woman in space as she arrives at the ISS	5
2016-11-18	theguardian	Oldest woman in space blasts off again for third ISS mission	5
2016-11-18	bbc	Peggy Whitson: Blast off to the ISS for oldest woman in space	5
2016-11-19	telegraph	Russian spaceship delivers three astronauts to space station	5
2016-11-19	ap	Space station receives oldest female astronaut, bit of Mars	5
2016-11-20	foxnews	Space station welcomes the oldest woman astronaut, and a bit of Mars	5
2016-11-20	france24	Space station welcomes Frenchman and world's oldest astronaut	5
2016-11-23	bbc	Waste not, want not	6
2016-11-24	france24	French astronaut Pesquet describes first days aboard space station	7
2016-11-25	telegraph	French astronaut lands on International Space Station - and is asked to fix the loo	7
2017-05-12	bloomberg	NASA Rejects Idea of Humans on First Flight of New Rocket	8
2017-05-12	bloomberg	NASA Study Warns Against Putting Crew On Huge Rocket's First Flight	8
2017-05-13	reuters	NASA delays debut launch of \$23 billion moon rocket and capsule	9
2018-10-03	france24	NASA skeptical on sabotage theory after mystery ISS leak	10
2018-10-03	theguardian	Nasa casts doubt on Russian theory ISS air leak was sabotage	10
2018-10-03	independent	Nasa casts doubt on claims International Space Station leak was deliberate	10
2018-10-04	france24	Astronauts return to Earth from ISS amid US-Russia tensions	11
2018-10-04	france24	ISS astronauts return to Earth amid US-Russia tensions	11
2019-04-11	nytimes	Scott Kelly Spent a Year in Orbit. His Body Is Not Quite the Same.	12
2019-04-11	cnn	Human health can be 'mostly sustained' for a year in space, NASA Twins Study concludes	12
2019-04-11	bloomberg	NASA's Twins Study Sees No Red Flags for Human Space Travel	12
2019-04-11	independent	Space is doing strange things to astronauts' bodies, Nasa study reveals	12
2019-04-11	reuters	Oh, brother! NASA twins study shows how space changes the human body	12
2019-04-11	france24	NASA's 'Twins Study,' landmark research for an eventual Mars mission	12

Table A1: **Excerpt of the timeline about the International Space Station in HLG.** Group is the global group, aggregating labels from the five annotators. The full timeline contains 257 headlines and 107 distinct groups.