

Name _____

Period _____ Date _____

Practice Test – Advanced Kinematics (Version 4)

On any problems, you must show all work, include units, round properly, and box your final answer.


Do the algebra first, before plugging in values.

Rewrite the following statement in the space below: On my honor, before God, I have neither given, nor received, any aid on this test.


For all questions:

- Use $g = 9.80 \text{ m/s}^2$ and neglect air resistance.
- Round numerical answers to three significant figures.
- 50 minutes. Four questions, 25 points each (100 points total).
- The last page is optional extra practice and is not part of the timed test.

1. (25 points) The velocity-time graph below shows the motion of an elevator moving along a vertical shaft (up is the positive direction) from $t = 0$ s to $t = 10$ s. On the blank grid, draw the corresponding acceleration-time graph. Show the slope calculation for each segment of the velocity-time graph.

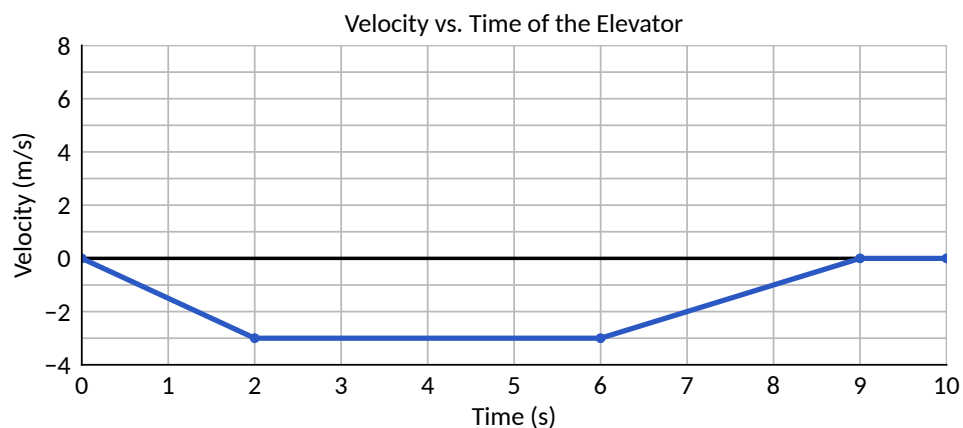

Draw your acceleration-time graph here:

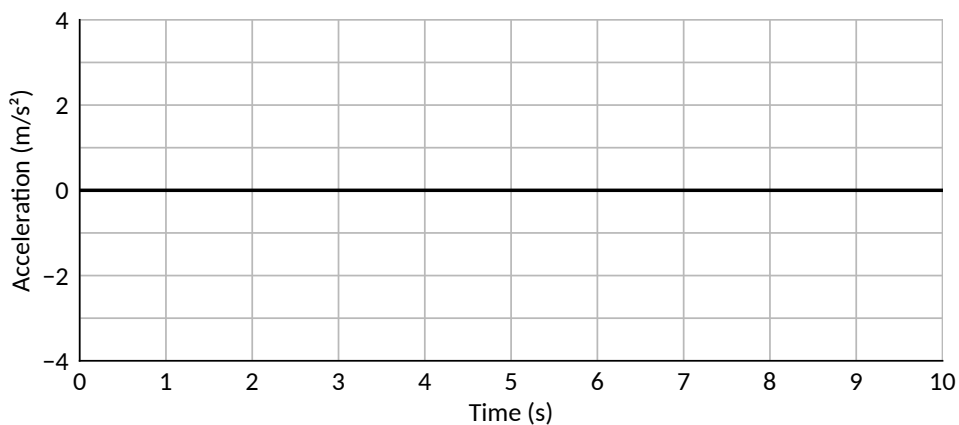

Slope calculations:

2. (25 points) A jet touches down on a straight, level runway at 72.0 m/s. It then slows with a constant acceleration of magnitude 4.00 m/s^2 until it stops. How far down the runway does the jet travel while stopping?

3. (25 points) A golfer chips a ball off a level fairway with an initial speed of 18.0 m/s at 50.0° above the horizontal. The ball lands on the green at the same height it was hit from. Assume air resistance is negligible. What is the ball's range (the horizontal distance it travels before landing)?

4. (25 points) A construction worker drops a wrench from a steel beam at a height h above the ground. Assume air resistance is negligible. If up is the positive direction, what is the wrench's velocity just before it hits the ground? Derive a mathematical expression in terms of h and g .

Optional extra practice (not part of the timed test, not scored)

E1. For the golf ball in Question 3: (a) How long is it in the air? (b) What is its maximum height?

E2. For the jet in Question 2: (a) How long does it take to stop? (b) If its initial speed were doubled and it slowed with the same acceleration, by what factor would its stopping distance change?

E3. For the wrench in Question 4: write its velocity $v_y(t)$ as a function of the time t since it was released, and state the time interval over which this expression is valid.

Answer Key – Practice Test, Version 4 – Advanced Kinematics

Worked step by step, the same way as the class notes: sketch, list the variables, pick the equation, algebra first, then numbers with units. $g = 9.80 \text{ m/s}^2$; answers to three significant figures.

AP Physics 1 equation sheet, kinematics (Mechanics and Fluids, first three):

#1 $v_x = v_{x0} + a_x t$ · #2 $x = x_0 + v_{x0} t + \frac{1}{2} a_x t^2$ · #3 $v_x^2 = v_{x0}^2 + 2a_x(x - x_0)$

Same equations as $v_f = v_i + at$, $\Delta x = v_i t + \frac{1}{2} at^2$, $v_f^2 = v_i^2 + 2a\Delta x$. Pick the one that leaves out the variable you don't know and don't need. For vertical motion use y in place of x .

1. Acceleration-time graph of the elevator (25 points)


Step 1 Acceleration is the slope of the v-t graph.

$$a = \frac{\Delta v}{\Delta t} = \frac{v_f - v_i}{t_f - t_i} \text{ (read } v_i \text{ and } v_f \text{ at the start and end of each straight piece; values read off grid lines are treated as exact)}$$

Step 2 Find the slope of each segment.


segment	$\Delta v = v_f - v_i$	$\Delta t = t_f - t_i$	$a = \Delta v / \Delta t$
0 s to 2 s	$(-3 \text{ m/s}) - 0 \text{ m/s} = -3 \text{ m/s}$	$2 \text{ s} - 0 \text{ s} = 2 \text{ s}$	-1.50 m/s²
2 s to 6 s	$(-3 \text{ m/s}) - (-3 \text{ m/s}) = 0 \text{ m/s}$	$6 \text{ s} - 2 \text{ s} = 4 \text{ s}$	0 m/s²
6 s to 9 s	$0 \text{ m/s} - (-3 \text{ m/s}) = 3 \text{ m/s}$	$9 \text{ s} - 6 \text{ s} = 3 \text{ s}$	+1.00 m/s²
9 s to 10 s	$0 \text{ m/s} - 0 \text{ m/s} = 0 \text{ m/s}$	$10 \text{ s} - 9 \text{ s} = 1 \text{ s}$	0 m/s²

Step 3 Draw each slope as a flat line over its time interval. Label both axes with units.

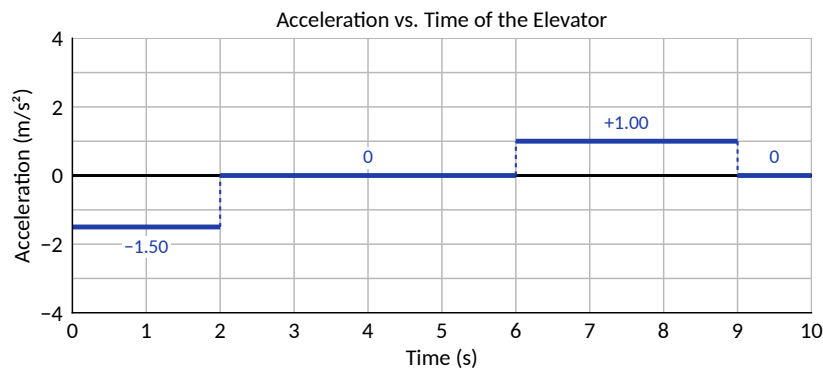

Watch out: from 6 s to 9 s the elevator is moving **down** ($v < 0$) but slowing down, so the slope is positive and **is positive**. Slowing down means a points opposite v ; it does not always mean a is negative. A straight slanted v-t line always becomes a flat a-t line; a flat v-t line becomes $a = 0$.

2. Landing jet: stopping distance (25 points)

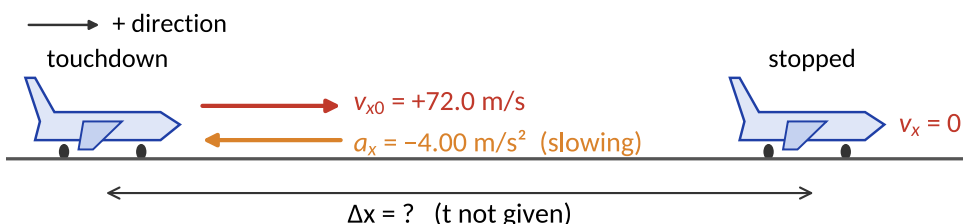

Step 1 Pick a positive direction and get the sign of a.

Let the direction the jet moves be +. The jet is moving + but slowing down, so its velocity is decreasing: Δv is negative, which makes a negative. The slowing acceleration points opposite the motion, so $a = -4.00 \text{ m/s}^2$.

Step 2 List the five variables.

$v_i (= v_{x0})$	$v_f (= v_x)$	a	t	Δx
+72.0 m/s	0 m/s (stops)	-4.00 m/s ²	not given, not asked	? (wanted)

Step 3 Pick the equation.

AP sheet	equation	leaves out
#1	$v_x = v_{x0} + a_x t$	$x - x_0$ (Δx)
#2	$x = x_0 + v_{x0} t + \frac{1}{2} a_x t^2$	v_x (final velocity)
#3	$v_x^2 = v_{x0}^2 + 2a_x(x - x_0)$	t (time) ← use this one

Why #3: time is not given and not asked for. #3, written $v_f^2 = v_i^2 + 2a\Delta x$, is the only one without t.

Step 4 Start from $v_f^2 = v_i^2 + 2a\Delta x$ and set $v_f = 0$. Solve for Δx before any numbers.


$$v_f^2 = v_i^2 + 2a\Delta x \rightarrow 0 = v_i^2 + 2a\Delta x \rightarrow 2a\Delta x = -v_i^2 \rightarrow \Delta x = -\frac{v_i^2}{2a}$$

Step 5 Plug in numbers with units.

$$\Delta x = -\frac{(+72.0 \text{ m/s})^2}{2(-4.00 \text{ m/s}^2)} = -\frac{(5184 \text{ m}^2/\text{s}^2)}{(-8.00 \text{ m/s}^2)} = \boxed{648 \text{ m}}$$

The minus sign in the formula and the negative a cancel, so Δx comes out positive: the jet moves forward while it stops. If you get a negative distance, a had the wrong sign. Units: $(\text{m}^2/\text{s}^2) \div (\text{m/s}^2) = \text{m}$.

3. Golf chip: range (25 points)

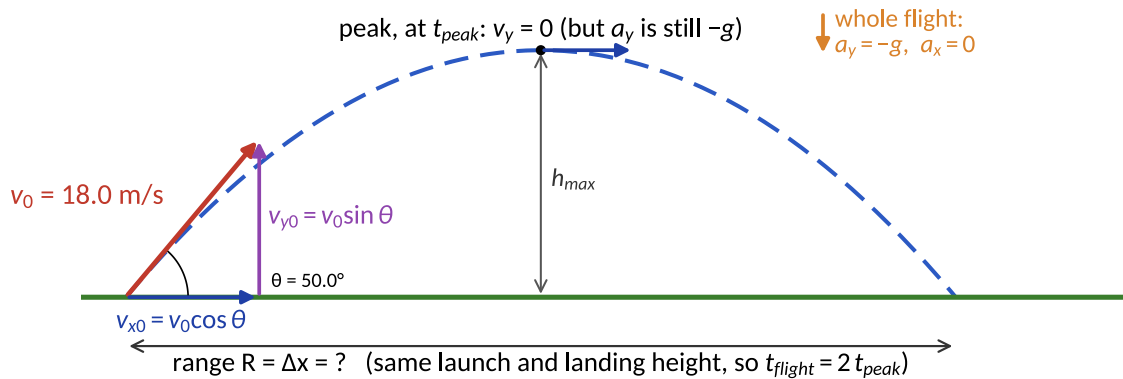

Split the motion into two motions. Sideways moves at a constant speed ($a_x = 0$). Up and down is free fall ($a_y = -g$). **Time** is the only thing both share.

Step 1 Resolve the initial velocity into components (keep letters; numbers go in at the end).

$v_{x0} = v_0 \cos \theta$ (the side next to the angle: along the ground)

$v_{y0} = v_0 \sin \theta$ (the side across from the angle: straight up)

Step 2 Make the T-chart.

horizontal	vertical
$a_x = 0$	$a_y = -g = -9.80 \text{ m/s}^2$
$v_{x0} = v_0 \cos \theta$	$v_{y0} = v_0 \sin \theta$
$\Delta x = R = ?$	at the peak: $v_y = 0$
$t = t_{\text{flight}}$	$t_{\text{peak}} = ?$

Step 3 Find the time to the peak, where $v_y = 0$.

AP sheet	equation	leaves out
#1	$v_y = v_{y0} + a_y t$	$y - y_0 (\Delta y) \leftarrow \text{use this one}$
#2	$y = y_0 + v_{y0} t + \frac{1}{2} a_y t^2$	v_y (final velocity)
#3	$v_y^2 = v_{y0}^2 + 2 a_y (y - y_0)$	t (time)

Why #1: at the peak you know $v_y = 0$, v_{y0} and a_y , and you want t . The height of the peak is not known, so use #1, the one that leaves out Δy .

$$v_y = v_{y0} + a_y t \rightarrow 0 = v_0 \sin \theta - g t_{\text{peak}} \rightarrow t_{\text{peak}} = \frac{v_0 \sin \theta}{g}$$

Step 4 Double it for the whole flight.

The ball lands at the same height it was hit from, so the trip down takes exactly as long as the trip up:

$$t_{\text{flight}} = 2t_{\text{peak}} = \frac{2v_0 \sin \theta}{g}$$

Watch out: at the peak $v_y = 0$, but the acceleration is still $a_y = -g$, pointing down. Gravity never switches off. Doubling t_{peak} only works because the launch and landing heights match. And $\Delta y = 0$ over the whole flight means it ends at the height it started, not that the acceleration is zero.

Step 5 Use the flight time in the horizontal column.


Why #2 (x-form): horizontally you know t and v_{x0} and want Δx ; with $a_x = 0$, #2 becomes $\Delta x = v_{x0}t$.

$$x - x_0 = v_{x0}t + \frac{1}{2}a_x t^2 \rightarrow R = v_{x0}t_{\text{flight}} = (v_0 \cos \theta) \frac{2v_0 \sin \theta}{g} \rightarrow \boxed{R = \frac{2v_0^2 \sin \theta \cos \theta}{g}}$$

Step 6 Now plug in numbers with units.

$$R = \frac{2(18.0 \text{ m/s})^2(\sin 50.0^\circ)(\cos 50.0^\circ)}{(9.80 \text{ m/s}^2)} = \boxed{32.6 \text{ m}}$$

Check: $t_{\text{peak}} = (18.0 \text{ m/s})(\sin 50.0^\circ)/(9.80 \text{ m/s}^2) = 1.407 \text{ s}$, $t_{\text{flight}} = 2.814 \text{ s}$, $v_{x0} = 11.57 \text{ m/s}$, and $(11.57 \text{ m/s})(2.814 \text{ s}) = 32.56 \text{ m} \approx 32.6 \text{ m}$. ✓ ($2 \sin \theta \cos \theta = \sin 2\theta$, so this also equals $v_0^2 \sin 2\theta / g$.)

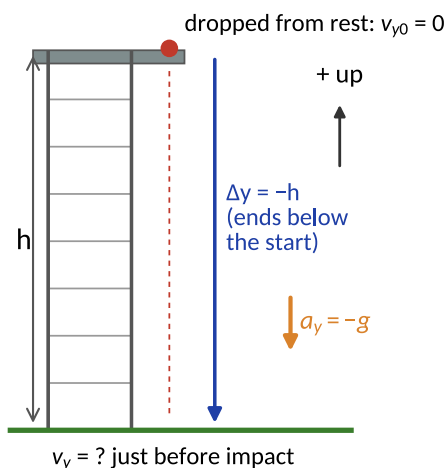4. Wrench dropped from a beam: impact velocity (25 points), variables only

No numbers anywhere: the answer is in terms of h and g . Both are positive numbers; the signs come from directions.

Up is + (the question says so), origin at the drop point. The ground is h below the start, so $\Delta y = -h$. Gravity points down, so $a_y = -g$.

Step 1 List the five variables (vertical, so y in place of x).

v_{y0} (initial)	v_y (final)	a_y	t	$y - y_0 = \Delta y$
0 (dropped from rest)	? (wanted)	$-g$	not given, not asked	$-h$

Step 2 Pick the equation.

AP sheet	equation	leaves out
#1	$v_y = v_{y0} + a_y t$	$y - y_0$ (Δy)
#2	$y = y_0 + v_{y0} t + \frac{1}{2} a_y t^2$	v_y (final velocity)
#3	$v_y^2 = v_{y0}^2 + 2a_y(y - y_0)$	t (time) ← use this one

Why #3: t is not given and not asked, and you want the final velocity. #3 is the only one without t.

Step 3 Solve with letters.

$$v_y^2 = v_{y0}^2 + 2a_y(y - y_0) = 0^2 + 2(-g)(-h) = 2gh \rightarrow v_y = \pm\sqrt{2gh}$$

Step 4 Pick the root.

Taking a square root always gives two answers. The wrench is moving **down** just before it lands, and down is the negative direction, so the physical answer is the negative root: $v_y = -\sqrt{2gh}$

The **speed** is the size of the velocity, which is always positive: speed = $|v_y| = \sqrt{2gh}$.

Units check: $\sqrt{(m/s^2)(m)} = \sqrt{m^2/s^2} = m/s$.

Why not the + root? $+\sqrt{2gh}$ would mean moving upward at the ground, which is impossible for something dropped from rest. The minus sign is the direction, not a mistake.

Optional extra practice (not scored)**E1. Golf chip: time in the air and maximum height**

$$(a) \text{ Time in the air } = t_{\text{flight}} = \frac{2v_0 \sin \theta}{g} = \frac{2(18.0 \text{ m/s})(\sin 50.0^\circ)}{(9.80 \text{ m/s}^2)} = \boxed{2.81 \text{ s}}$$

Why #3 (y-form) for (b): at the peak $v_y = 0$, and you want the height without needing t.

$$(b) 0 = (v_0 \sin \theta)^2 - 2g h_{\text{max}} \rightarrow h_{\text{max}} = \frac{v_0^2 \sin^2 \theta}{2g} = \frac{(18.0 \text{ m/s})^2 (\sin 50.0^\circ)^2}{2(9.80 \text{ m/s}^2)} = \boxed{9.70 \text{ m}}$$

E2. Landing jet: stopping time and the doubling question

$$\text{Why \#1: now } t \text{ is wanted and } \Delta x \text{ is not needed. } v_f = v_i + at \rightarrow 0 = v_i + at \rightarrow t = -\frac{v_i}{a} = -\frac{(+72.0 \text{ m/s})}{(-4.00 \text{ m/s}^2)} =$$

$$\boxed{18.0 \text{ s}}$$

$$(b) \Delta x = -\frac{v_i^2}{2a}: v_i \text{ is squared, so doubling it multiplies } \Delta x \text{ by } 2^2 = \boxed{4} \text{ (} 4 \times 648 \text{ m} = 2592 \text{ m). Not 2.}$$

E3. Wrench dropped from a beam: velocity as a function of time

$$\text{Why \#1 (y-form): it links } v_y \text{ and } t \text{ directly. Up is +. } v_y = 0 + (-g)t \rightarrow \boxed{v_y(t) = -gt}$$

Why #2 (y-form) for the impact time: you know $y - y_0 = -h$ and want t. $-h = -\frac{1}{2}gt_f^2 \rightarrow t_f = \sqrt{2h/g}$, so it is valid for $\boxed{0 \leq t \leq \sqrt{2h/g}}$. Check: $-g\sqrt{2h/g} = -\sqrt{2gh}$, matching Question 4.

Suggested partial credit (25 points per question, 100 total)

1. Acceleration-time graph

Suggested partial credit	pts
Slope formula $a = \Delta v / \Delta t$ set up with values and units for each of the 4 segments (2 each)	8
Correct slope value with sign and units for each segment (1 each)	4
Four horizontal segments at the correct accelerations (2 each)	8
Changes in acceleration occur at the correct times; no slanted lines	2
Axes labeled with quantity and units; readable scale	3
Total	25

2. Landing jet

Suggested partial credit	pts
Starts from $v_f^2 = v_i^2 + 2a\Delta x$ (sheet #3) because time is not involved	5
Sets $v_f = 0$	3
Acceleration negative, with a reason (opposite the motion / slowing down)	4
Solves $\Delta x = -v_i^2 / (2a)$ before substituting	6
Substitution with units in every parenthesis	4
Final answer, 3 significant figures, units, boxed	3
Total	25

3. Golf chip range

Suggested partial credit	pts
Resolves v_0 into $v_0 \cos \theta$ and $v_0 \sin \theta$	4
Time to peak from $v_y = 0$ with sheet #1: $t_{\text{peak}} = v_0 \sin \theta / g$	5
Doubles t_{peak} for the flight time, with the equal-height reason	4
$R = v_{x0}t$ with the expression for t substituted (not a rounded number)	5
Substitution with units in every parenthesis	4
Final answer, 3 significant figures, units, boxed	3
Total	25

4. Dropped wrench

Suggested partial credit	pts
States $v_{y0} = 0$, $a_y = -g$ and $\Delta y = -h$, consistent with up positive	6
Uses sheet #3 (y-form), since t is not involved	4
Algebra to $v_y^2 = 2gh$	5
Chooses the negative root with a reason (moving down)	6
Final $v_y = -\sqrt{2gh}$ boxed, and speed $\sqrt{2gh}$ distinguished	4
Total	25