Chapter 4: Threads & Concurrency

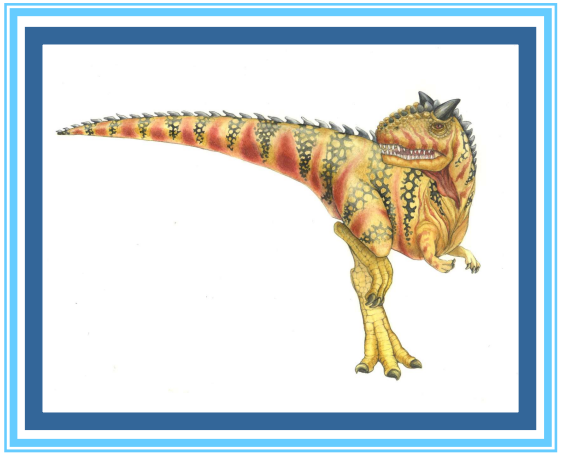

Silberschatz, Galvin and Gagne ©2018

Motivation

- Most modern applications are multithreaded
- Threads run within application
- Multiple tasks with the application can be implemented by separate threads
  - Update display
  - Fetch data
  - Spell checking
  - Answer a network request
- Process creation is heavy-weight while thread creation is light-weight
- Can simplify code, increase efficiency
- Kernels are generally multithreaded

Single and Multithreaded Processes

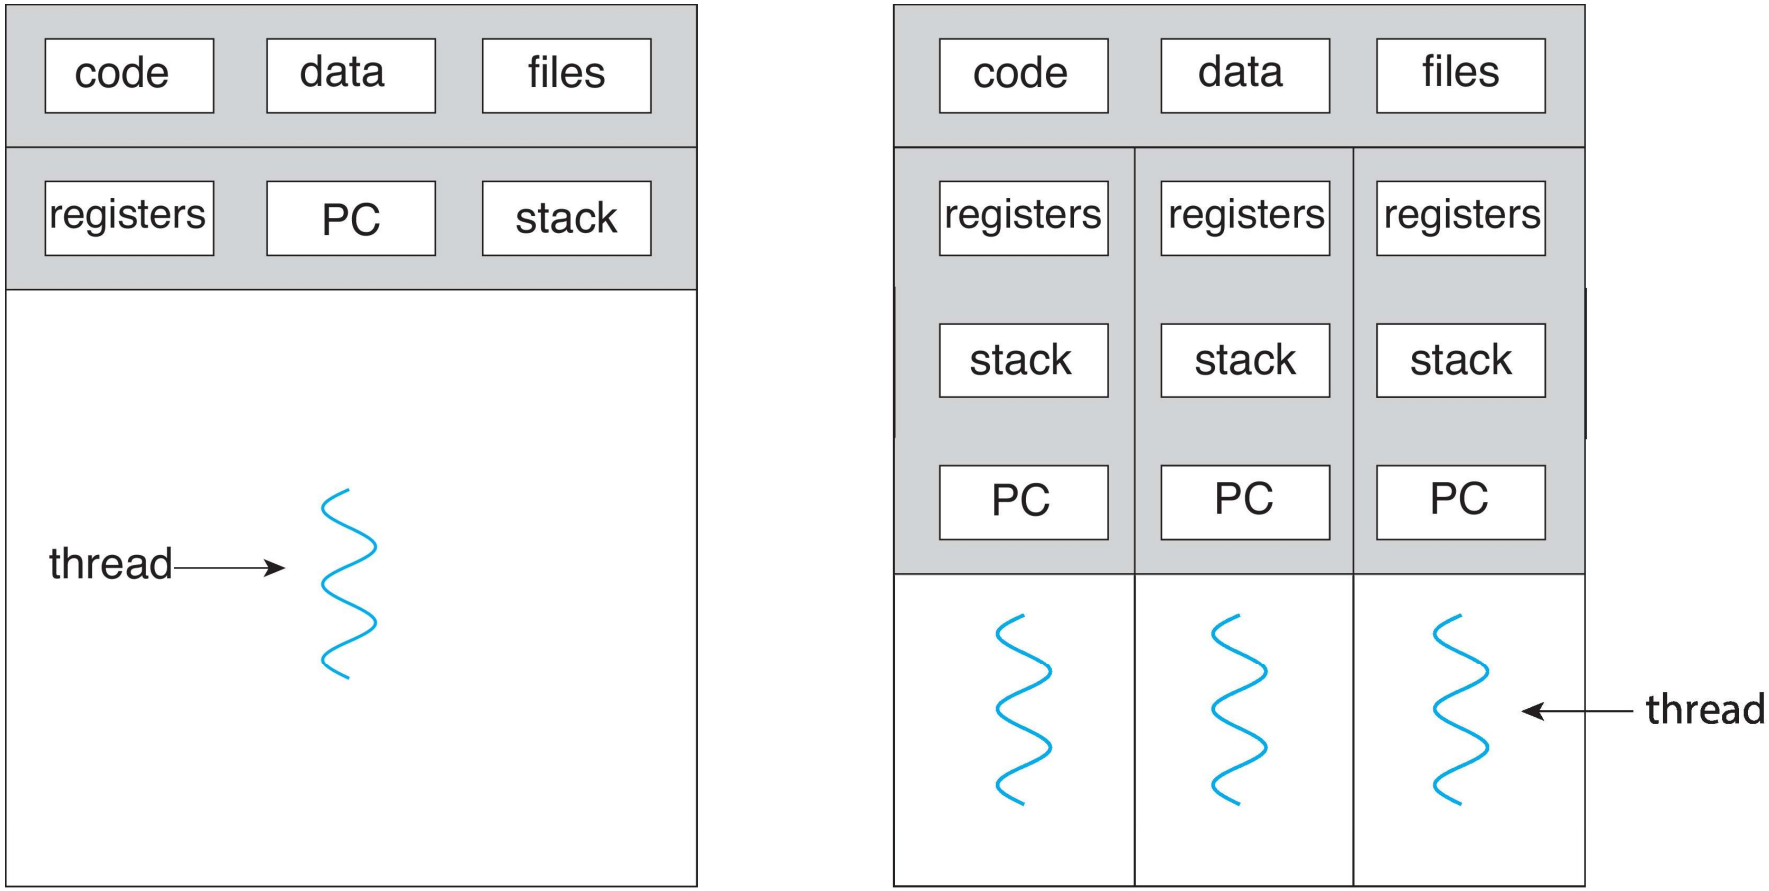

single-threaded process

multithreaded process

Multithreaded Server Architecture

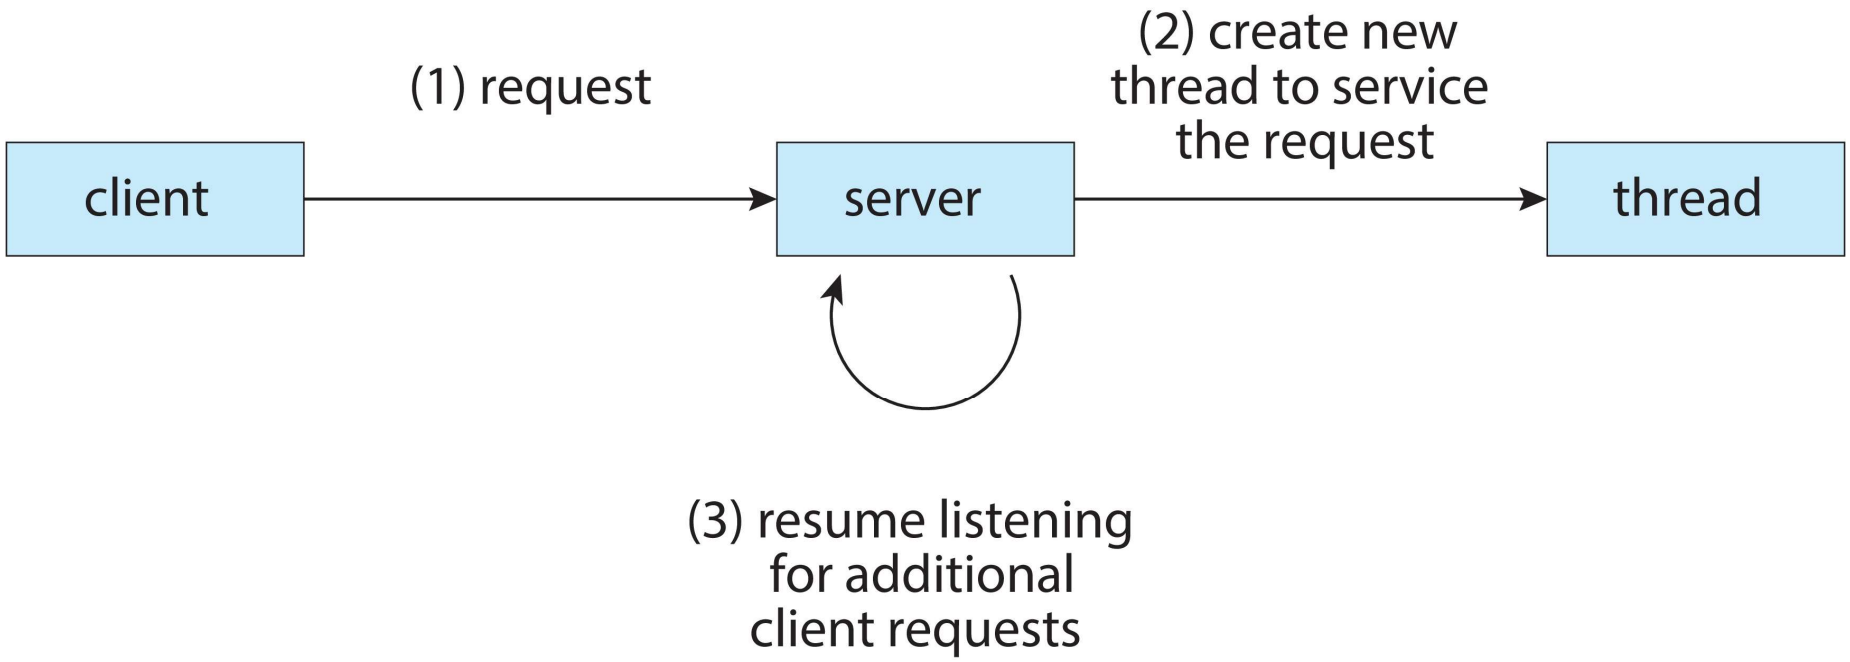

Benefits

- **Responsiveness –** may allow continued execution if part of process is blocked, especially important for user interfaces
- **Resource Sharing –** threads share resources of process, easier than shared memory or message passing
- **Economy –** cheaper than process creation, thread switching lower overhead than context switching
- **Scalability –** process can take advantage of multicore architectures

Multicore Programming

- **Multicore** or **multiprocessor** systems puts pressure on programmers, challenges include:
  - **Dividing activities**
  - **Balance**
  - **Data splitting**
  - **Data dependency**
  - **Testing and debugging**
- ***Parallelism*** implies a system can perform more than one task simultaneously
- ***Concurrency*** supports more than one task making progress
  - Single processor / core, scheduler providing concurrency

Concurrency vs. Parallelism

- **Concurrent execution on single-core system:**

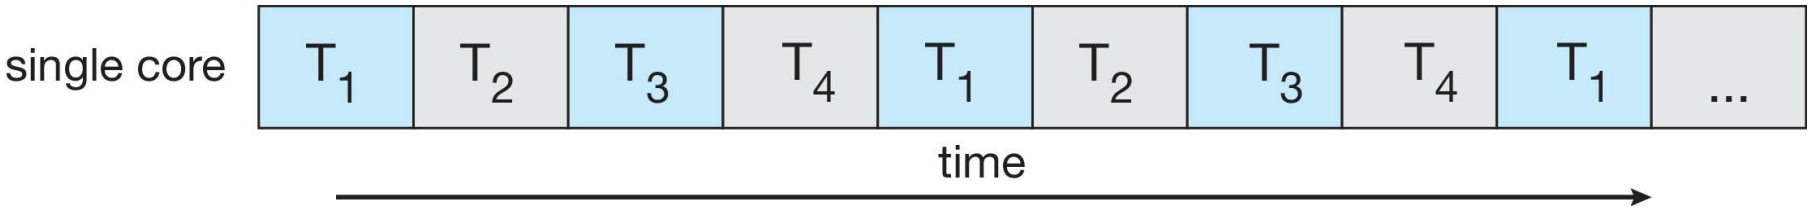

- **Parallelism on a multi-core system:**

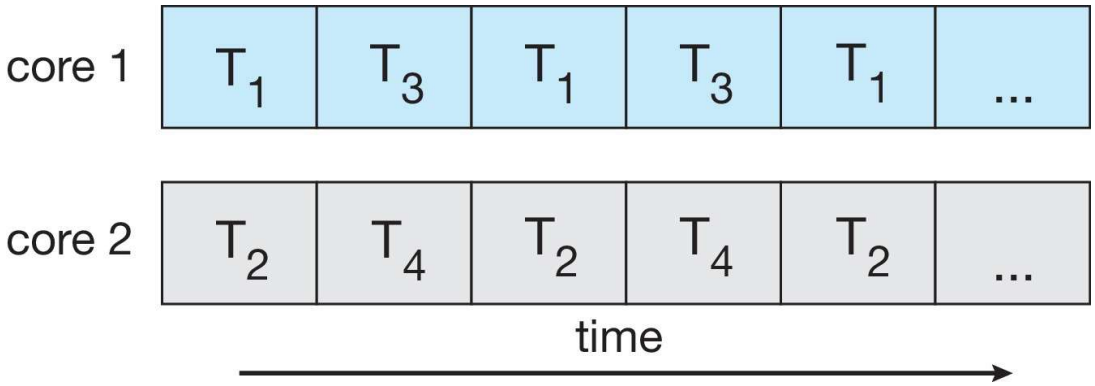

Multicore Programming

- Types of parallelism
  - **Data parallelism** – distributes subsets of the same data across multiple cores, same operation on each
  - **Task parallelism** – distributing threads across cores, each thread performing unique operation

Data and Task Parallelism

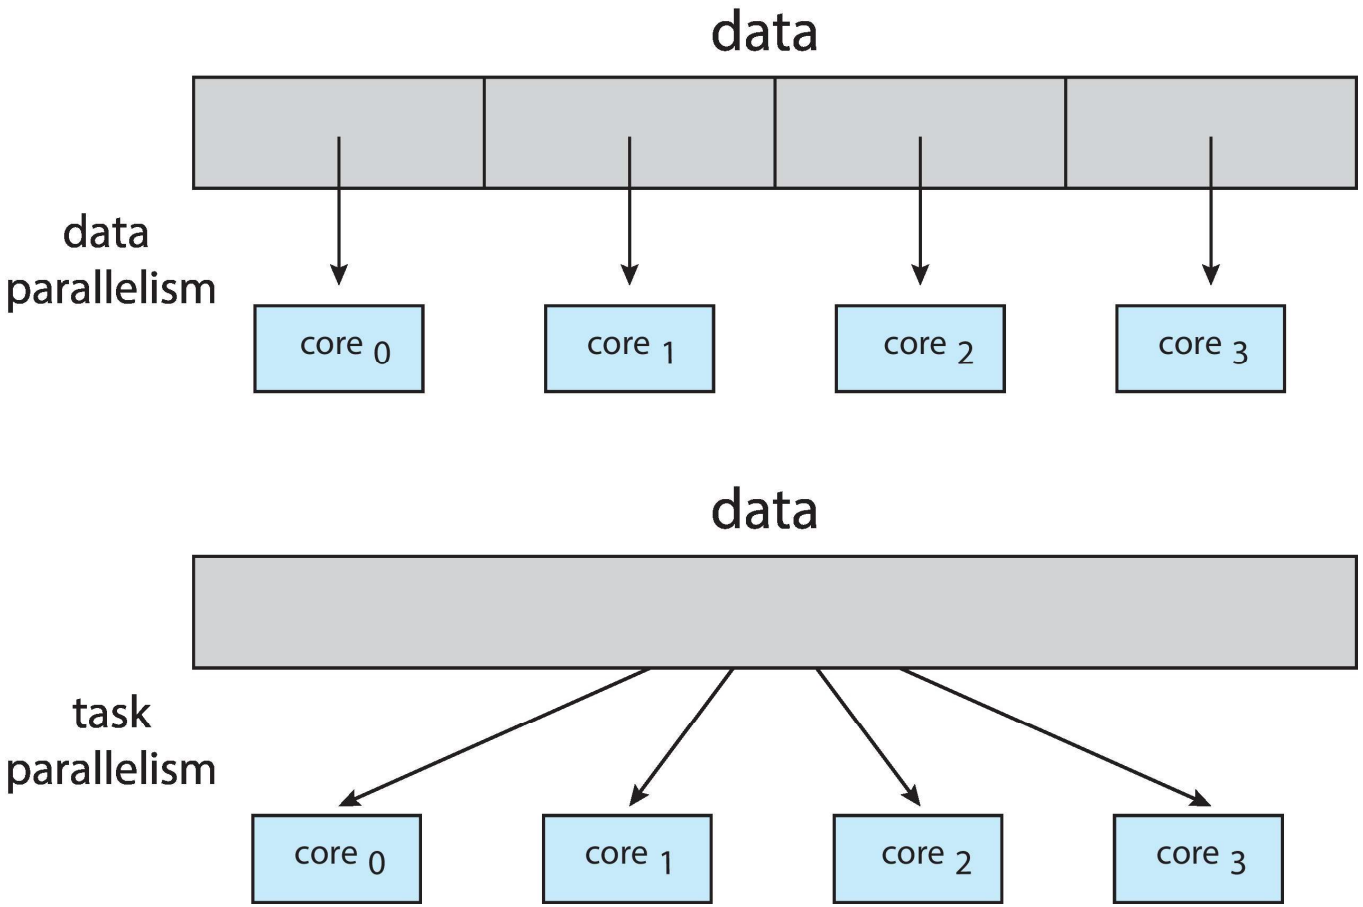

User Threads and Kernel Threads

- **User threads** - management done by user-level threads library
- Three primary thread libraries:
  - POSIX **Pthreads**
  - Windows threads
  - Java threads
- **Kernel threads** - Supported by the Kernel
- Examples – virtually all general-purpose operating systems, including:
  - Windows
  - Linux
  - Mac OS X
  - iOS
  - Android

User and Kernel Threads

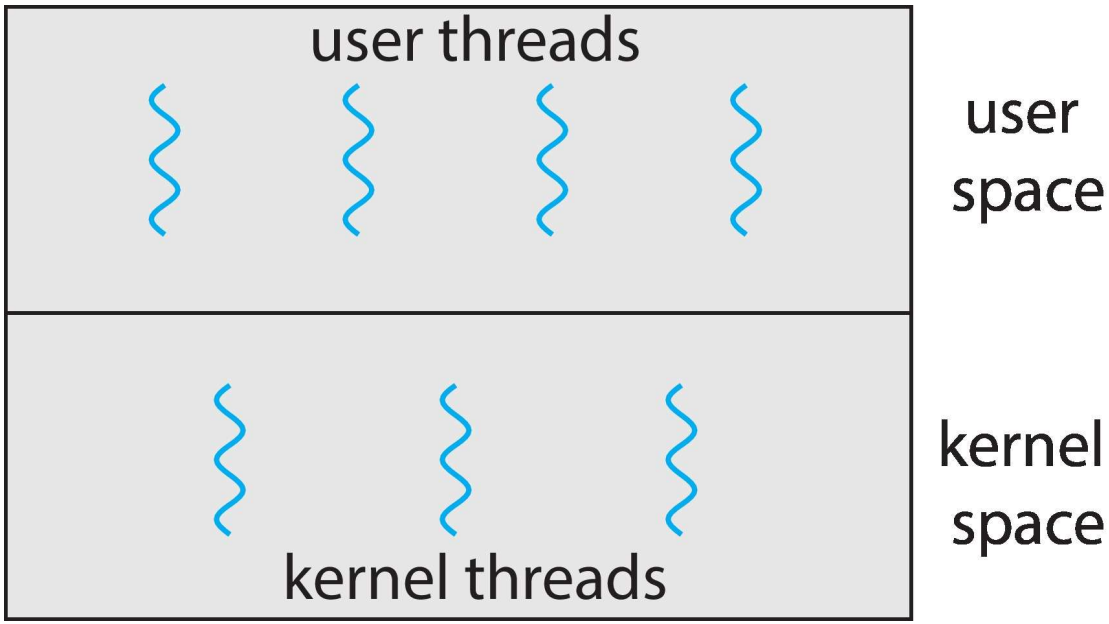

Multithreading Models

- Many-to-One
- One-to-One
- Many-to-Many

Many-to-One

- Many user-level threads mapped to single kernel thread
- One thread blocking causes all to block
- Multiple threads may not run in parallel on multicore system because only one may be in kernel at a time
- Few systems currently use this model
- Examples:
  - **Solaris Green Threads**
  - **GNU Portable Threads**

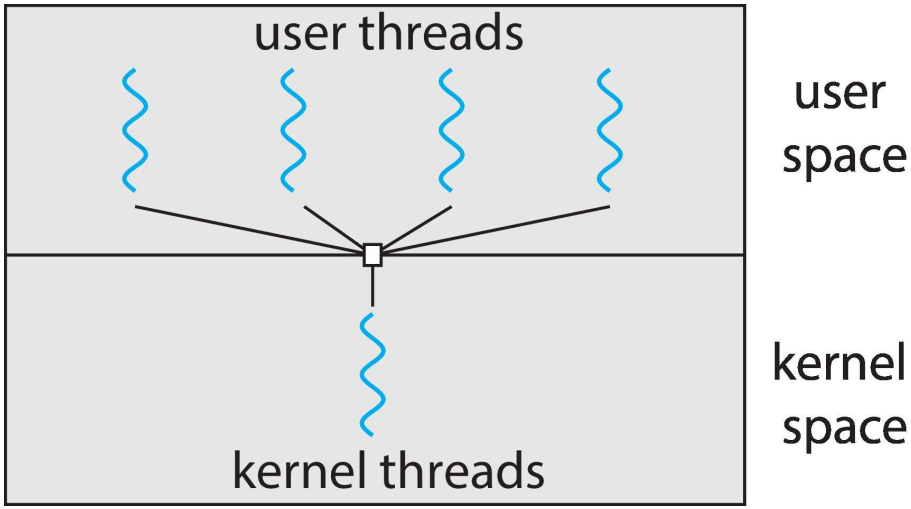

One-to-One

- Each user-level thread maps to kernel thread
- Creating a user-level thread creates a kernel thread
- More concurrency than many-to-one
- Number of threads per process sometimes restricted due to overhead
- Examples
  - Windows
  - Linux

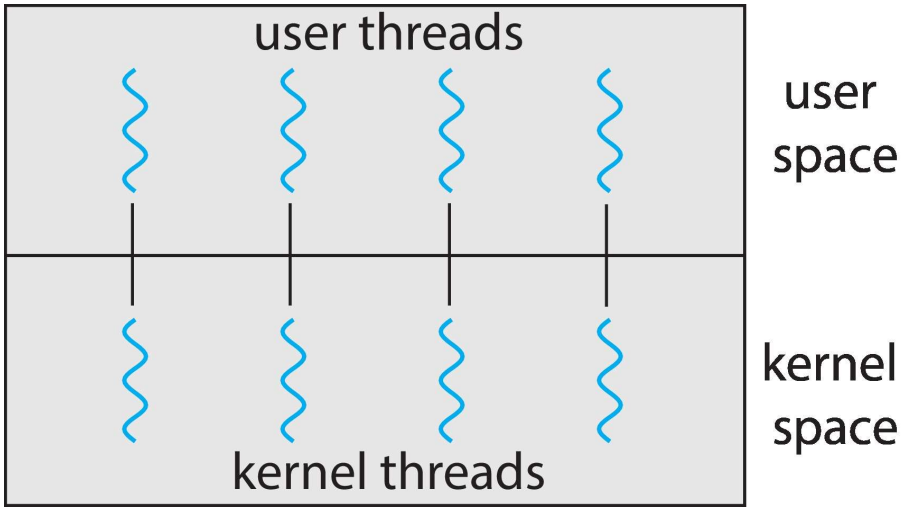

Many-to-Many Model

- Allows many user level threads to be mapped to many kernel threads
- Allows the operating system to create a sufficient number of kernel threads
- Windows with the *ThreadFiber* package
- Otherwise not very common

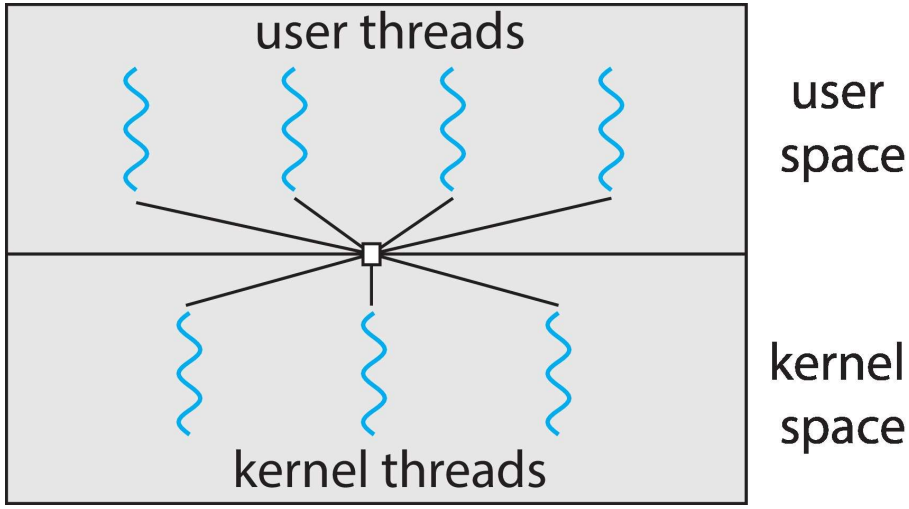

Two-level Model

- Similar to M:M, except that it allows a user thread to be **bound** to kernel thread

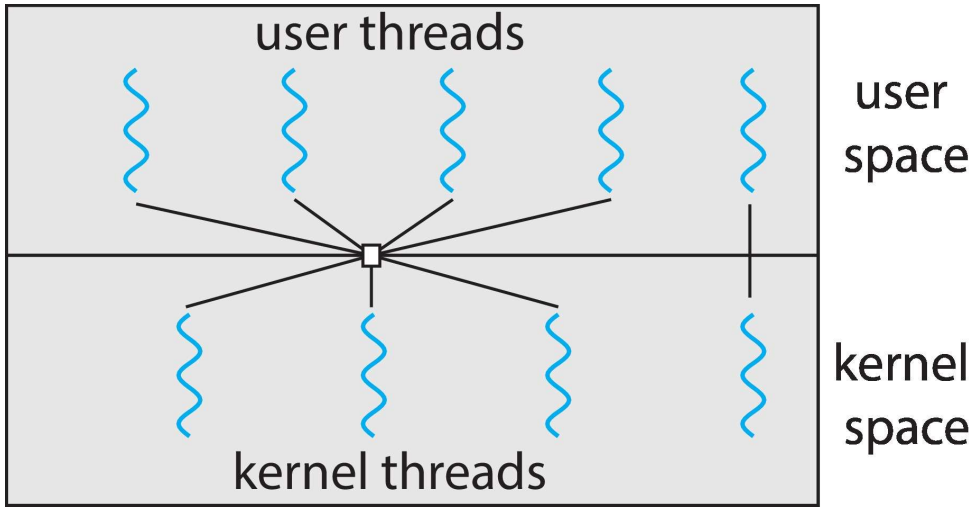

Thread Libraries

- **Thread library** provides programmer with API for creating and managing threads
- Two primary ways of implementing
  - Library entirely in user space
  - Kernel-level library supported by the OS

Pthreads

- May be provided either as user-level or kernel-level
- A POSIX standard (IEEE 1003.1c) API for thread creation and synchronization
- ***Specification***, not ***implementation***
- API specifies behavior of the thread library, implementation is up to development of the library
- Common in UNIX operating systems (Linux & Mac OS X)

Fork-Join Parallelism

- Multiple threads (tasks) are **forked**, and then **joined**.

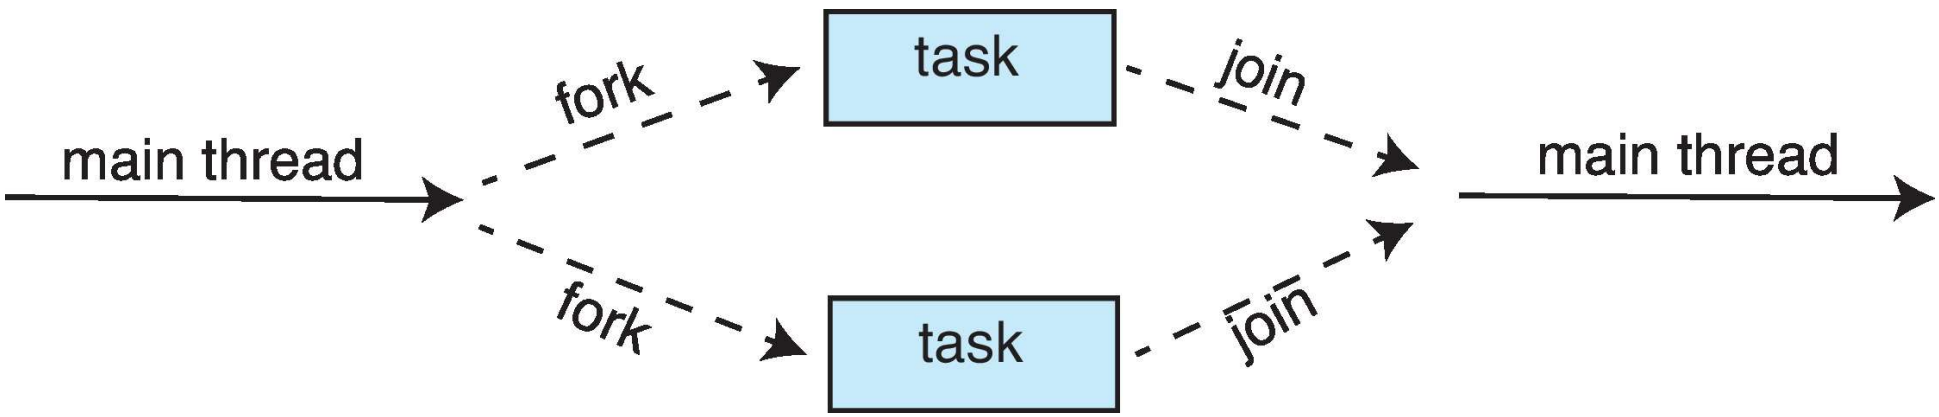

Fork-Join Parallelism

- General algorithm for fork-join strategy:

```
Task(problem)
   if problem is small enough
      solve the problem directly
   else
      subtask1 = fork(new Task(subset of problem)
      subtask2 = fork(new Task(subset of problem)

      result1 = join(subtask1)
      result2 = join(subtask2)

      return combined results
```

Fork-Join Parallelism

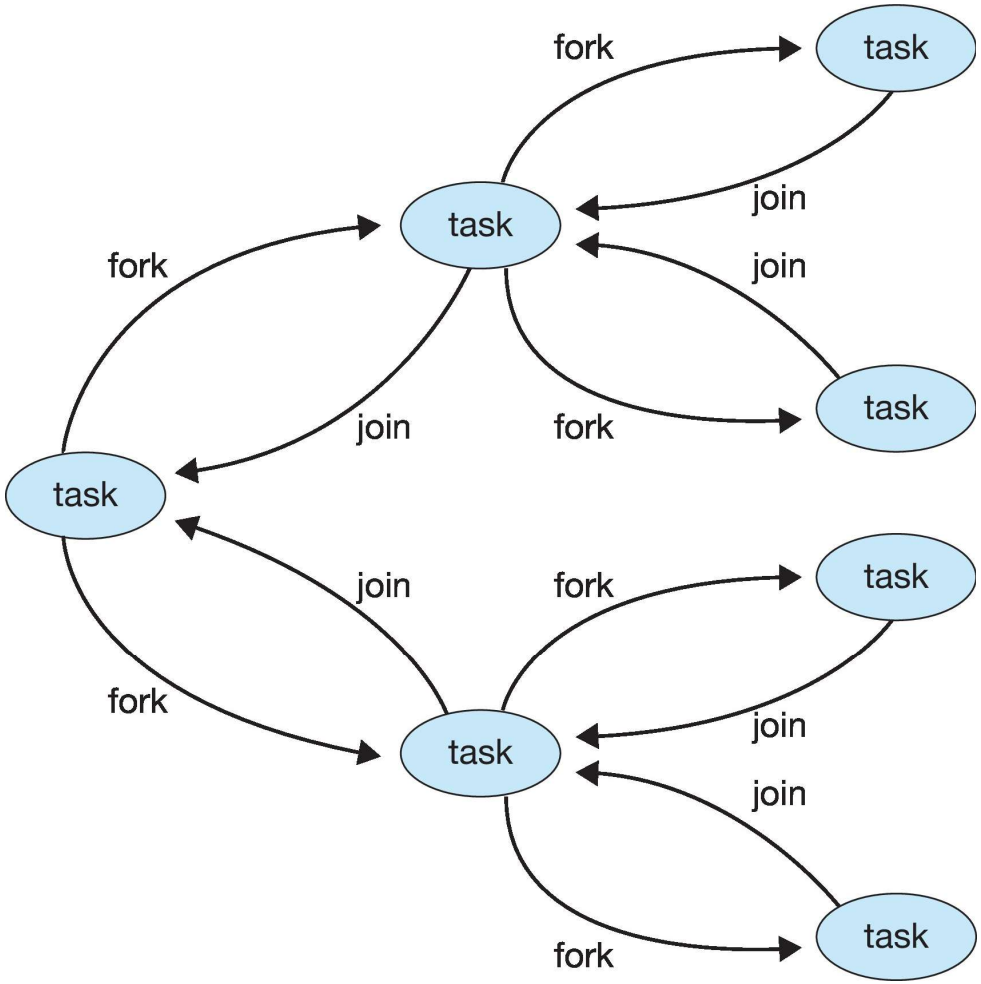

Grand Central Dispatch

- Apple technology for macOS and iOS operating systems
- Extensions to C, C++ and Objective-C languages, API, and run-time library
- Allows identification of parallel sections
- Manages most of the details of threading
- Block is in “^{ }” :

```
^{ printf("I am a block"); }
```

- Blocks placed in dispatch queue
  - Assigned to available thread in thread pool when removed from queue

Grand Central Dispatch

- Two types of dispatch queues:
  - **serial** – blocks removed in FIFO order, queue is per process, called **main queue**
    - Programmers can create additional serial queues within program
  - **concurrent** – removed in FIFO order but several may be removed at a time
    - Four system wide queues divided by quality of service:
      - `QOS_CLASS_USER_INTERACTIVE`
      - `QOS_CLASS_USER_INITIATED`
      - `QOS_CLASS_USER_UTILITY`
      - `QOS_CLASS_USER_BACKGROUND`

Grand Central Dispatch

- For the Swift language a task is defined as a closure – similar to a block, minus the caret
- Closures are submitted to the queue using the `dispatch_async()` function:

```
let queue = dispatch_get_global_queue
   (QOS_CLASS_USER_INITIATED, 0)

dispatch_async(queue,{ print("I am a closure.") })
```

Intel Threading Building Blocks (TBB)

- Template library for designing parallel C++ programs
- A serial version of a simple for loop

```
for (int i = 0; i < n; i++) {
   apply(v[i]);
}
```

- The same for loop written using TBB with **`parallel_for`** statement:

```
parallel_for (size_t(0), n, [=](size_t i) {apply(v[i]);});
```

Threading Issues

- Semantics of **fork()** and **exec()** system calls
- Signal handling
  - Synchronous and asynchronous
- Thread cancellation of target thread
  - Asynchronous or deferred
- Thread-local storage
- Scheduler Activations

Semantics of fork() and exec()

- Does **`fork()`** duplicate only the calling thread or all threads?
  - Some UNIXes have two versions of fork
- **`exec()`** usually works as normal – replace the running process including all threads

Signal Handling

- **Signals** are used in UNIX systems to notify a process that a particular event has occurred.
- A **signal handler** is used to process signals
  1. Signal is generated by particular event
  2. Signal is delivered to a process
  3. Signal is handled by one of two signal handlers:
     1. default
     2. user-defined
- Every signal has **default handler** that kernel runs when handling signal
  - **User-defined signal handler** can override default
  - For single-threaded, signal delivered to process

Signal Handling (Cont.)

- Where should a signal be delivered for multi-threaded?
  - Deliver the signal to the thread to which the signal applies
  - Deliver the signal to every thread in the process
  - Deliver the signal to certain threads in the process
  - Assign a specific thread to receive all signals for the process

Thread Cancellation

- Terminating a thread before it has finished
- Thread to be canceled is **target thread**
- Two general approaches:
  - **Asynchronous cancellation** terminates the target thread immediately
  - **Deferred cancellation** allows the target thread to periodically check if it should be cancelled
- Pthread code to create and cancel a thread:

```
pthread_t tid;

/* create the thread */
pthread_create(&tid, 0, worker, NULL);

 . . .

/* cancel the thread */
pthread_cancel(tid);

/* wait for the thread to terminate */
pthread_join(tid,NULL);
```

Thread Cancellation (Cont.)

- Invoking thread cancellation requests cancellation, but actual cancellation depends on thread state

Mode	State	Type
Off	Disabled	–
Deferred	Enabled	Deferred
Asynchronous	Enabled	Asynchronous

- If thread has cancellation disabled, cancellation remains pending until thread enables it
- Default type is deferred
  - Cancellation only occurs when thread reaches **cancellation point**
    - i.e., `pthread_testcancel()`
    - Then **cleanup handler** is invoked
- On Linux systems, thread cancellation is handled through signals

Thread-Local Storage

- **Thread-local storage** (**TLS**) allows each thread to have its own copy of data
- Useful when you do not have control over the thread creation process (i.e., when using a thread pool)
- Different from local variables
  - Local variables visible only during single function invocation
  - TLS visible across function invocations
- Similar to **`static`** data
  - TLS is unique to each thread

Scheduler Activations

- Both M:M and Two-level models require communication to maintain the appropriate number of kernel threads allocated to the application
- Typically use an intermediate data structure between user and kernel threads – **lightweight process** (**LWP**)
  - Appears to be a virtual processor on which process can schedule user thread to run
  - Each LWP attached to kernel thread
  - How many LWPs to create?
- Scheduler activations provide **upcalls** - a communication mechanism from the kernel to the **upcall handler** in the thread library
- This communication allows an application to maintain the correct number kernel threads

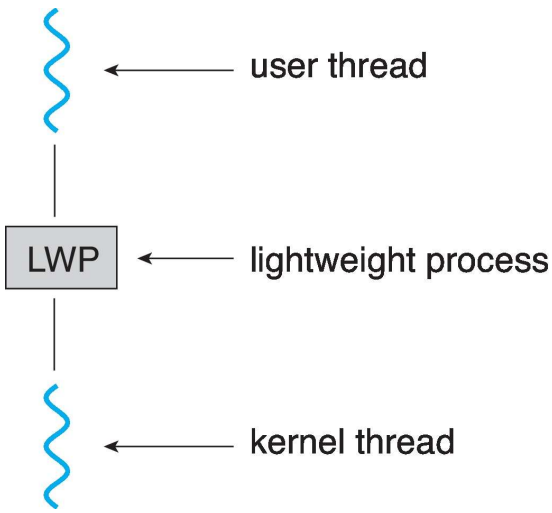

Operating System Examples

- Windows Threads
- Linux Threads

Windows Threads

- Windows API – primary API for Windows applications
- Implements the one-to-one mapping, kernel-level
- Each thread contains
  - A thread id
  - Register set representing state of processor
  - Separate user and kernel stacks for when thread runs in user mode or kernel mode
  - Private data storage area used by run-time libraries and dynamic link libraries (DLLs)
- The register set, stacks, and private storage area are known as the **context** of the thread

Windows Threads (Cont.)

- The primary data structures of a thread include:
  - ETHREAD (executive thread block) – includes pointer to process to which thread belongs and to KTHREAD, in kernel space
  - KTHREAD (kernel thread block) – scheduling and synchronization info, kernel-mode stack, pointer to TEB, in kernel space
  - TEB (thread environment block) – thread id, user-mode stack, thread-local storage, in user space

Windows Threads Data Structures

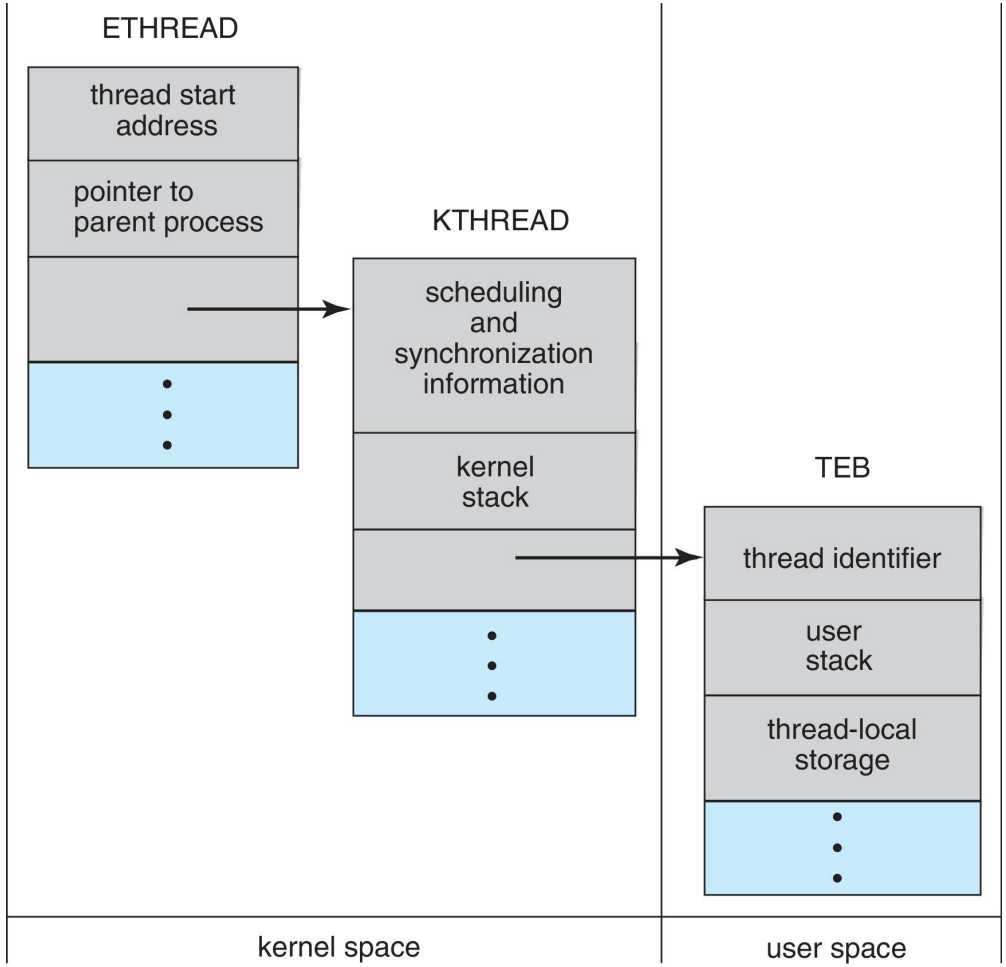

Linux Threads

- Linux refers to them as ***tasks*** rather than ***threads***
- Thread creation is done through **`clone()`** system call
- **`clone()`** allows a child task to share the address space of the parent task (process)
  - Flags control behavior

flag	meaning
`CLONE_FS`	File-system information is shared.
`CLONE_VM`	The same memory space is shared.
`CLONE_SIGHAND`	Signal handlers are shared.
`CLONE_FILES`	The set of open files is shared.

- **`struct task_struct`** points to process data structures (shared or unique)

End of Chapter 4

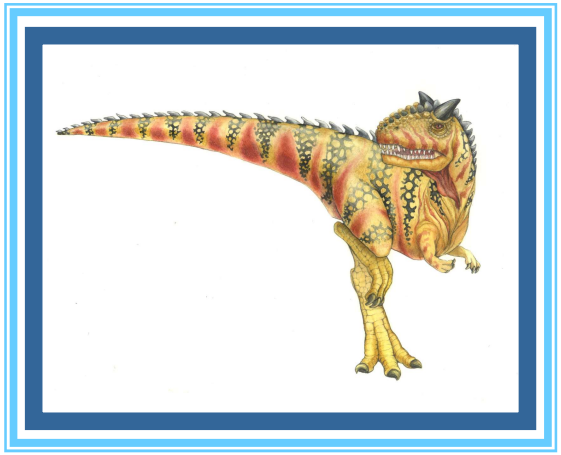

Silberschatz, Galvin and Gagne ©2018