Ana's diagnostic-review decision: which client should she investigate first?

Gigi Zhu | DSO 576 | Individual case | November 8, 2026

Evidence note. This case uses screenshots supplied by Gigi from the team's public live app on November 7-8, 2026. The all-client rank comparison was reconstructed from the November 8 screenshots. Checks below use displayed sample counts; they are not an independent raw-CSV audit or a new browser-session verification.

Ana should place Pano Scrobbler first in her diagnostic-review queue, while keeping the decision provisional. It is the highest-ranked displayed regular client at all three tested weights, with 360 affected observed accounts and 520 listens missing a recording MBID. The lower-ranked clients do change order, so Pano's stable rank does not establish stability of the entire shortlist. Ana reuses her existing CR-07 to request an all-client ranking comparison instead of relying on separate screenshots.

1. The person and the decision

Ana is a fictional MetaBrainz metadata analyst who has time for one initial client diagnostic review this week. From the five eligible clients, she must decide which client's missing recording-MBID submissions to investigate first. She wants a candidate with substantial observed reach and identifier gaps, and a choice she can explain under different priorities. Choosing poorly would waste her review time on a sample pattern that is not actionable. Her decision sets an investigation queue; it does not approve a pilot or predict the effects of contacting a maintainer.

2. Their real situation and alternatives

MusicBrainz explains that MBIDs identify database entities and distinguish items with ambiguous names [1]. ListenBrainz documents optional recording_mbid, submission_client and client-version metadata, and distinguishes client-submitted IDs from server-resolved mappings [2]. For Ana, missing submitted IDs motivate investigation; they do not establish an API violation, client causation or the absence of a server match.

For this fictional decision, Ana prioritizes observed affected-account reach, missing-ID volume and whether a maintainer could act. Alternatives are to group exports manually in a spreadsheet or Python, inspect submission payloads using the documentation [2], and ask maintainers about the submission path. Manual aggregation can answer count questions, while documentation and maintainer discussion help diagnose feasibility. The app brings the initial screening evidence together, but does not replace these checks. Maintainer capacity, implementation effort and upstream metadata are outside the displayed data; no maintainer conversation was conducted for this case.

Sources and supporting passages, consulted November 7, 2026:

[1] MusicBrainz / MetaBrainz Foundation, MusicBrainz Identifier: MBIDs and disambiguation.
https://musicbrainz.org/doc/MusicBrainz_Identifier

[2] ListenBrainz / MetaBrainz Foundation, JSON Documentation: Submission JSON, Payload JSON details and MBID Mapping.
https://listenbrainz.readthedocs.io/en/latest/users/json.html

3. The app in use

Live app: https://appapppy-mdilrzqijilc29whq52tc2.streamlit.app/
Sample mode; inclusive UTC playback dates 2005-02-13 through 2026-09-03; exclude classified importers; minimum distinct accounts 100. Start at 50% affected-account reach weight and 50% missing-ID volume weight. Leave scenario target coverage at 75%; no scenario outcome is used in this case. Open Shortlist, inspect pano scrobbler in Client detail, and read its version and ranking-sensitivity evidence. Then return to Shortlist and test reach weights 0%, 50% and 100%, holding the other settings constant.

The app reports 21,276 accepted source events, but only five eligible clients and 3,121 listens under the selected filters; 2,652 of those listens lack usable recording MBIDs. At 50% reach weight, listenbrainz ranks first with score 1.000 but has unknown classification. Pano Scrobbler ranks second overall and first among the displayed regular clients. Unknown means unverified, not regular. Ana therefore does not treat the top row as an automatically verified outreach candidate.

Observed sample measures

Pano Scrobbler measure	Observed sample value
Listens / distinct accounts	520 / 360
Affected accounts	360
Absent / populated-invalid recording IDs	520 / 0
Usable submitted-MBID coverage	0.0%
Version 4.42 listens	437 (84.04% of 520)
Scores at 0% / 50% / 100% reach	0.894 / 0.891 / 0.887

All-client ranks at the three reach weights

Submission client	0% reach	50% reach	100% reach
listenbrainz	1	1	1
pano scrobbler	2	2	2
navidrome	3	3	3
listenbrainz android	5	4	4
web scrobbler	4	5	5

The November 8 screenshots reproduce the earlier CR-07 rank change: Web Scrobbler is fourth at 0% reach weight, while ListenBrainz Android is fourth at 50% and 100%. Web Scrobbler has more unusable-ID listens (317 versus 305), but Android has more affected accounts (211 versus 166). At 0% reach weight, only missing-ID volume receives weight; increasing reach weight favors Android enough to reverse their order. Pano stays second at all three settings. This is a three-setting check on the selected sample, not a proof for every intermediate weight or future dataset.

Displayed-count checks: Pano's usable listens = 520 - 520 absent - 0 invalid = 0; listen coverage = 0 / 520 = 0.00%. Affected share of observed Pano accounts = 360 / 360 = 100.00%. Version 4.42 contributes 437 / 520 = 84.04% of Pano's observed listens. These are arithmetic checks on screenshot values, not tests of the underlying CSV or estimates for the full user population.

4. Reading the result for their decision

Does the number measure what this person cares about? Partly. The 360 affected observed accounts and 520 absent-ID listens address Ana's initial screening priorities. Coverage is a listen-level measure, however, and usable here means valid UUID syntax; the detail page says syntax does not verify MusicBrainz existence. This is kind 3, the real thing or a stand-in: syntactic coverage is not confirmed recording identity, maintainer willingness or achievable benefit. The ranking score is not a success probability.

Who is in the rows, and who is not? The source rows are observed listening events, not unique songs, installed clients or all users. The shortlist excludes classified importers and clients below the selected account threshold, but unknown classifications can remain. This is kind 6, share of whom: Pano's 0/520 describes selected observed listens, not every listen through that client. It is also kind 5, which dates belong: these are playback dates, not a census of current active installations. Version 4.42 dominates the sample; weekly gaps are unavailable observations, not measured zero coverage.

4. Reading the result (continued)

What outside the data matters to this decision? Ana must establish which component supplies IDs, whether upstream metadata is available, and whether a maintainer is active and able to help. Source [2] permits omission of unavailable optional metadata, so missing IDs are not automatically evidence of broken software. Source [1] concerns identifiers of particular entities, so a well-formed UUID alone is insufficient to confirm the correct recording. The app does not measure implementation effort or the causal impact of outreach.

What could they wrongly conclude from it? Pano's stable rank 2 could be misread as proof that all candidate priorities are stable. The all-client comparison disproves that: Android and Web Scrobbler exchange fourth and fifth place. Ana could also mistake the 0% sample coverage for a statement about all Pano users, or assume that contacting the maintainer will fix all 520 missing IDs. Neither follows. The appropriate conclusion is that Pano is a reasonable first investigation target under these settings, while lower-priority choices depend on the user's reach-versus-volume preferences.

5. The verdict: prove or break

Break the completeness of the ranking-comparison workflow, while retaining the app as a screening aid. Ana provisionally puts Pano Scrobbler first in her diagnostic-review queue: it combines 360 affected observed accounts, 520 absent-ID listens, regular classification and a stable rank across the three tested weights. She is better off with the app's shortlist and detail evidence than sorting raw listen totals alone, but should examine payloads for the observed versions and investigate feasibility before making a separate outreach decision. She must not use the app to assign blame, describe all client users, approve a pilot or promise a coverage target.

The following is Gigi Zhu's existing CR-07 from the previous assignment, not a new duplicate request. Its original date, authorship and historical evidence are retained. The supplied team log lists its status as open.

CR-07: Compare Rankings Across Different Weights

From: Gigi Zhu, 2026-10-26
Part: Shortlist ranking feature (Part 1)
Evidence: In Sample Data mode, with playback dates 2005-02-13 through 2026-09-03, classified importers excluded and minimum accounts set to 100, I compared reach weights of 0%, 50% and 100%. Web scrobbler ranked fourth at 0%, while listenbrainz android ranked fourth at 50% and 100%. The Shortlist table shows only the current setting, so comparing results required screenshots.
Change: Add a side-by-side comparison of all shortlisted clients' ranks at 0%, 50% and 100% reach weight. Explain rank changes using affected-account counts and unusable-ID listen counts so users can understand how their priorities affect the recommendation.
Priority: medium
Status: open

Case follow-up, November 8, 2026. Current live-app screenshots confirm all five ranks at 0%, 50% and 100%, including the Android/Web Scrobbler reversal. The current Client detail screenshot supplies a sensitivity table for Pano alone. Reconstructing the all-client comparison still required the separate Shortlist screenshots used here. These captures do not establish that no equivalent view exists elsewhere in the deployed app; verify that before marking CR-07 built. The requested improvement remains a consolidated all-client rank table with the same date/filter settings and an explanation tied to reach and unusable-ID counts.


Acceptance and impact. At these sample settings, the comparison should reproduce the five-client table in this case and explain why 317 versus 305 unusable-ID listens favors Web Scrobbler at 0%, while 211 versus 166 affected accounts favors Android as reach weight increases. This is a proposed acceptance check for the consolidated view, not an automated test executed here. Apply the view to every eligible client and retain the existing counts, ranking formula and workflows; other users and teammates' cases keep the same numerical inputs. Update the existing CR-07 history instead of adding a new number.

Appendix - screenshots from the live app

All screenshots below were supplied by Gigi. November 8 Shortlist evidence uses sample mode, playback 2005-02-13 through 2026-09-03, importer exclusion on, minimum accounts 100 and scenario target 75%. November 7 detail evidence uses the same baseline settings.


A. Live Shortlist - 0% reach weight

Reach 0%; missing-ID volume 100%; scenario target 75%. All five ranks and shared filters are visible.

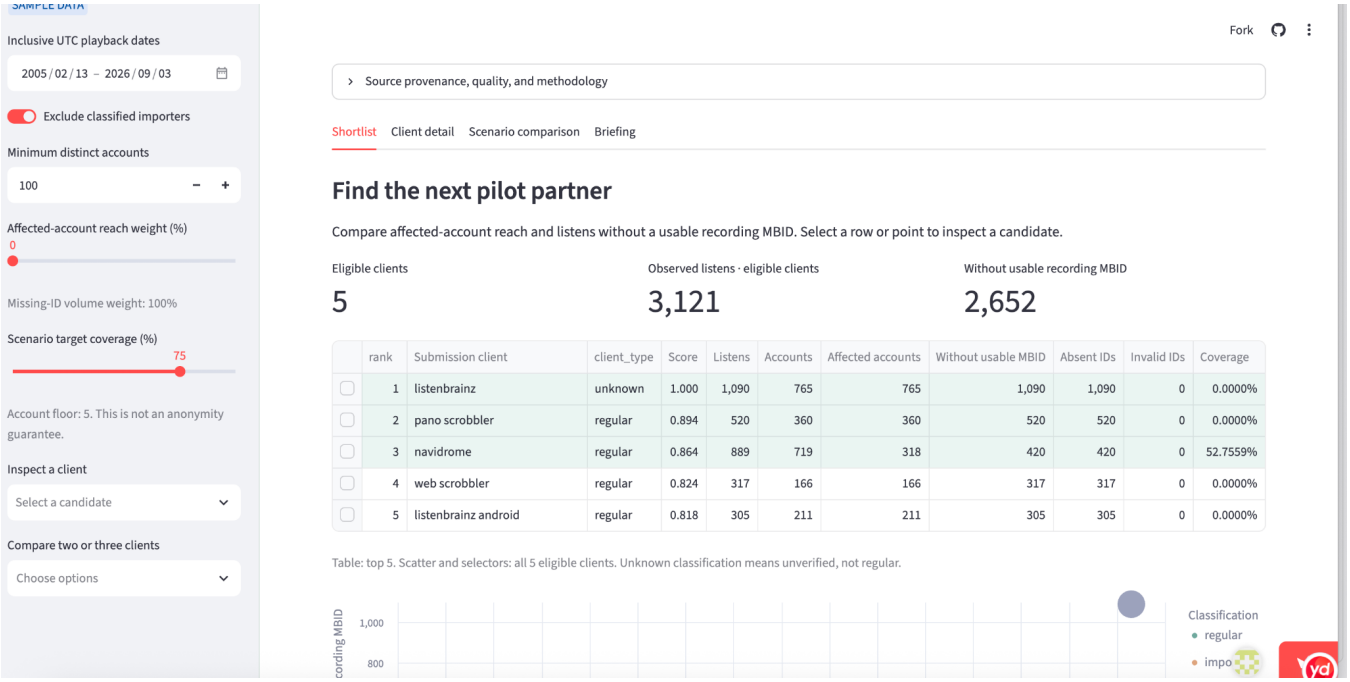


B. Live Shortlist - 50% reach weight

Reach 50%; missing-ID volume 50%; scenario target 75%. Settings and table were captured in consecutive screenshots with the same setting.

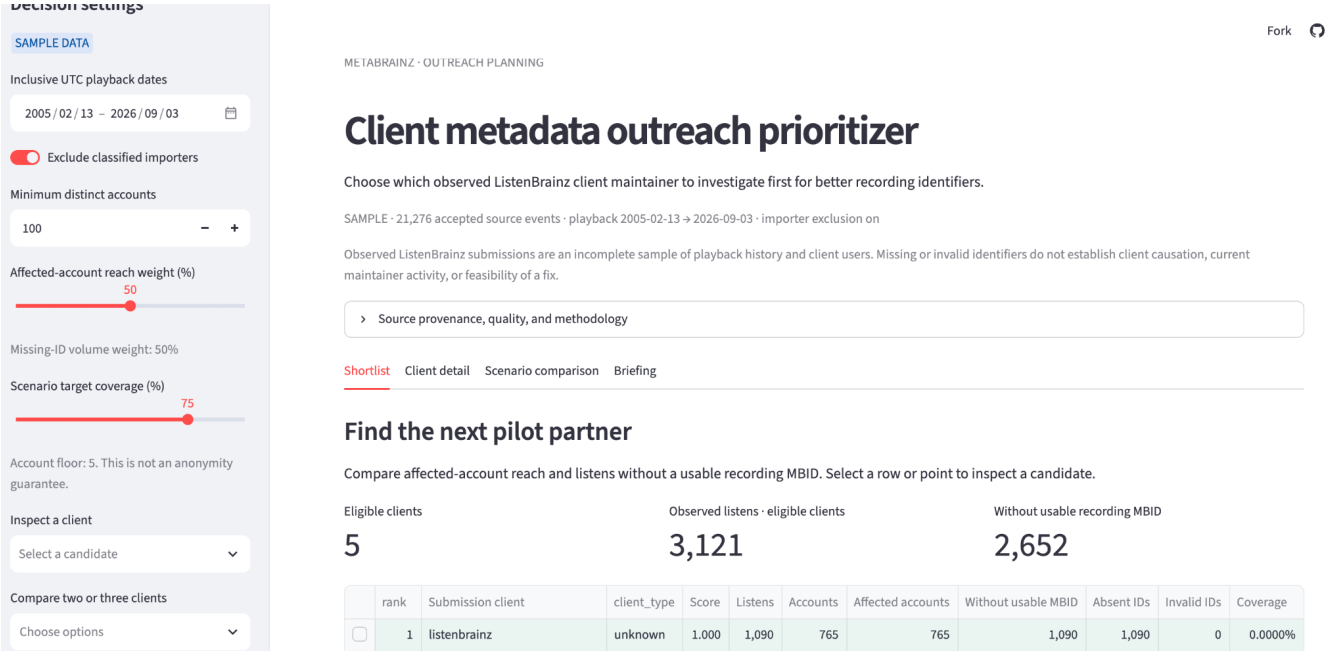

B. Live Shortlist - complete 50% table

The full table complements the preceding settings screenshot.

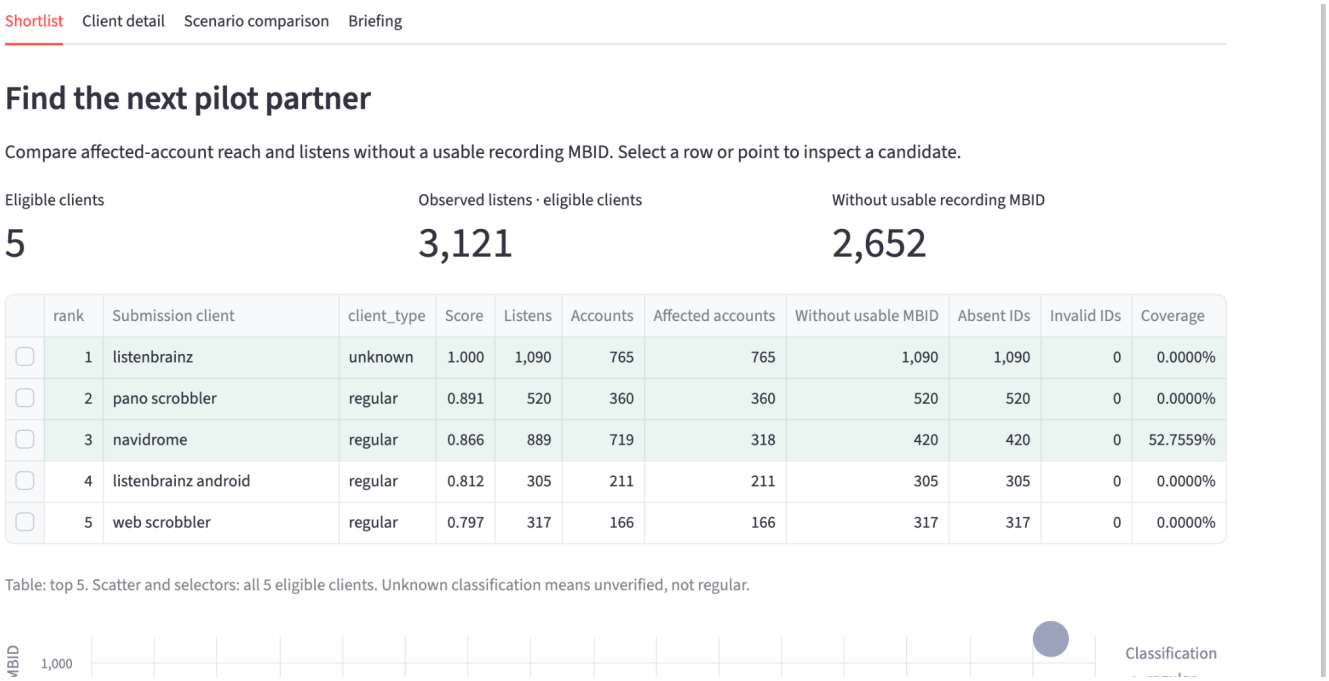

Shortlist | Client detail | Scenario comparison | Briefing

Find the next pilot partner

Compare affected-account reach and listens without a usable recording MBID. Select a row or point to inspect a candidate.


Eligible clients	Observed listens · eligible clients	Without usable recording MBID
5	3,121	2,652

rank	Submission client	client_type	Score	Listens	Accounts	Affected accounts	Without usable MBID	Absent IDs	Invalid IDs	Coverage
1	listenbrainz	unknown	1.000	1,090	765	765	1,090	1,090	0	0.0000%
2	pano scrobbler	regular	0.891	520	360	360	520	520	0	0.0000%
3	navidrome	regular	0.866	889	719	318	420	420	0	52.7559%
4	listenbrainz android	regular	0.812	305	211	211	305	305	0	0.0000%
5	web scrobbler	regular	0.797	317	166	166	317	317	0	0.0000%

Table: top 5. Scatter and selectors: all 5 eligible clients. Unknown classification means unverified, not regular.

C. Live Shortlist - 100% reach weight

Reach 100%; missing-ID volume 0%; scenario target 75%. Android ranks fourth and Web Scrobbler fifth.

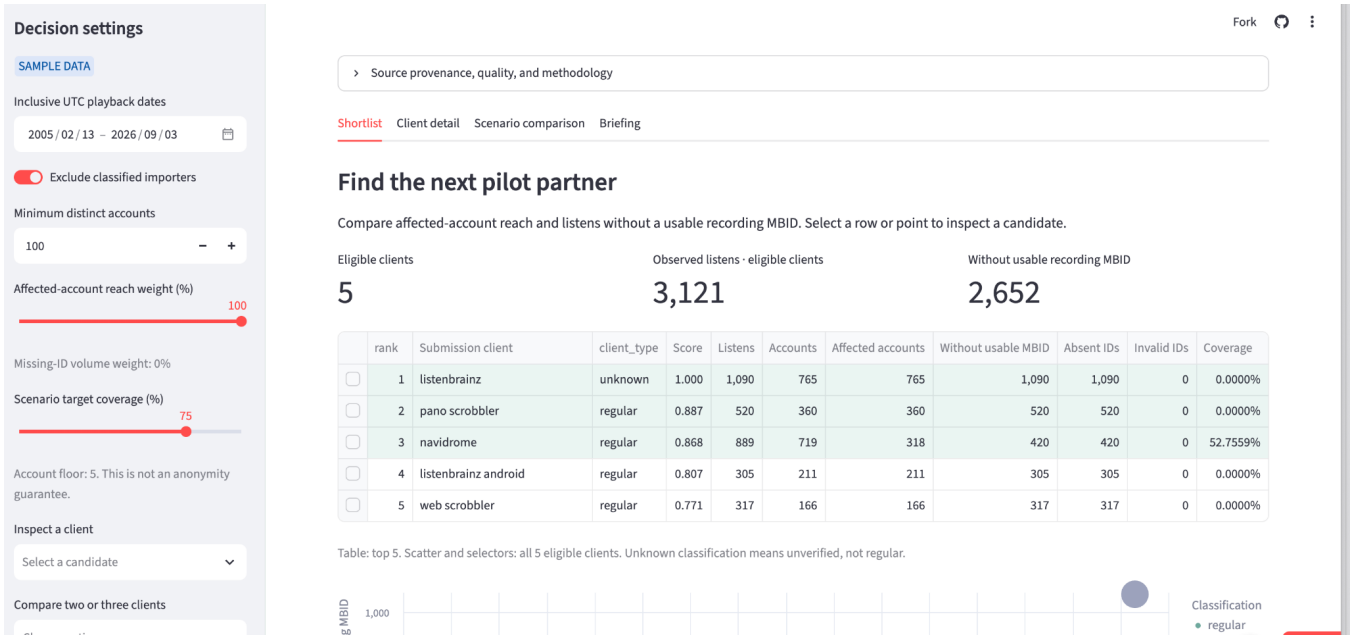


D. Live Pano Client detail

520 listens, 360 distinct and affected accounts, 520 absent IDs and 0 populated-invalid IDs. Version evidence is partially visible; no claim relies on cut-off columns.

pano scrobbler

Rank 2 · regular classification · score 0.891

Listens	Distinct accounts	Affected accounts	MBID coverage
520	360	360	0.0%



Denominator: 520 listens. Absent IDs: 520; populated invalid IDs: 0. UUID syntax does not verify MusicBrainz existence. Unknown-account listens: 0.

Version evidence

Known version share: 100.0%; unknown: 0.0%. Versions remain free text.

Submission client	client_type	unknown_account_listens	unknown_version_listens	first_play_date	last_play_date	client_version	Listens	with_re
pano scrobbler	regular	0	0	2026-02-24	2026-09-03	4.42	437	
pano scrobbler	regular	0	0	2026-09-03	2026-09-03	4.40	30	
pano scrobbler	regular	0	0	2026-09-03	2026-09-03	4.38	13	
pano scrobbler	regular	0	0	2026-09-03	2026-09-03	3.45 - 2025, Mar	10	
pano scrobbler	regular	0	0	2026-09-03	2026-09-03	3.44 - 2025, Jan	6	

E. Live Pano ranking sensitivity

Pano remains at rank 2 at reach weights 0, 0.5 and 1. This is one-client evidence.

Unavailable weeks are gaps, not measured zero coverage. Edge weeks may be partial.

Ranking sensitivity

client	rank	score	reach_weight
pano scrobbler	2	0.8943	0
pano scrobbler	2	0.8905	0.5
pano scrobbler	2	0.8867	1

score = w × log1p(affected accounts)/log1p(max affected accounts) + (1−w) × log1p(unusable IDs)/log1p(max unusable IDs); zero maxima contribute zero. Approximate additions = round(min(unusable IDs, max(0, target × total − valid IDs))); ties to even. Achieved coverage = (valid IDs + approximate additions) / total. Minimum additions = max(0, ceil(target × total − valid IDs)), capped at unusable IDs; decimal target arithmetic.

F. Live weekly playback evidence

Sparse observed playback weeks limit temporal generalization. No observations in a week does not mean a measured zero rate.

