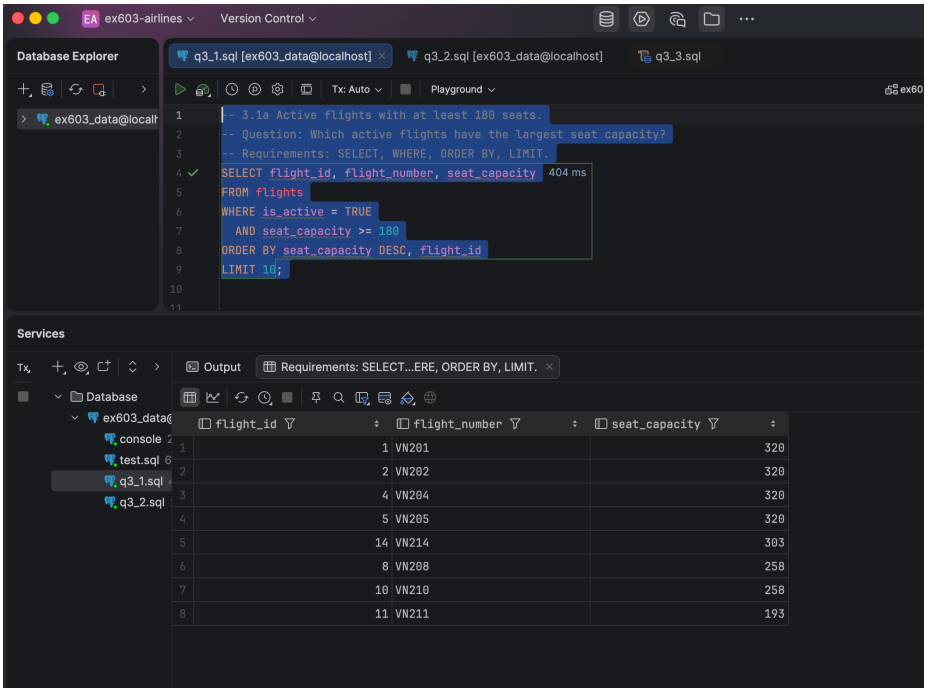
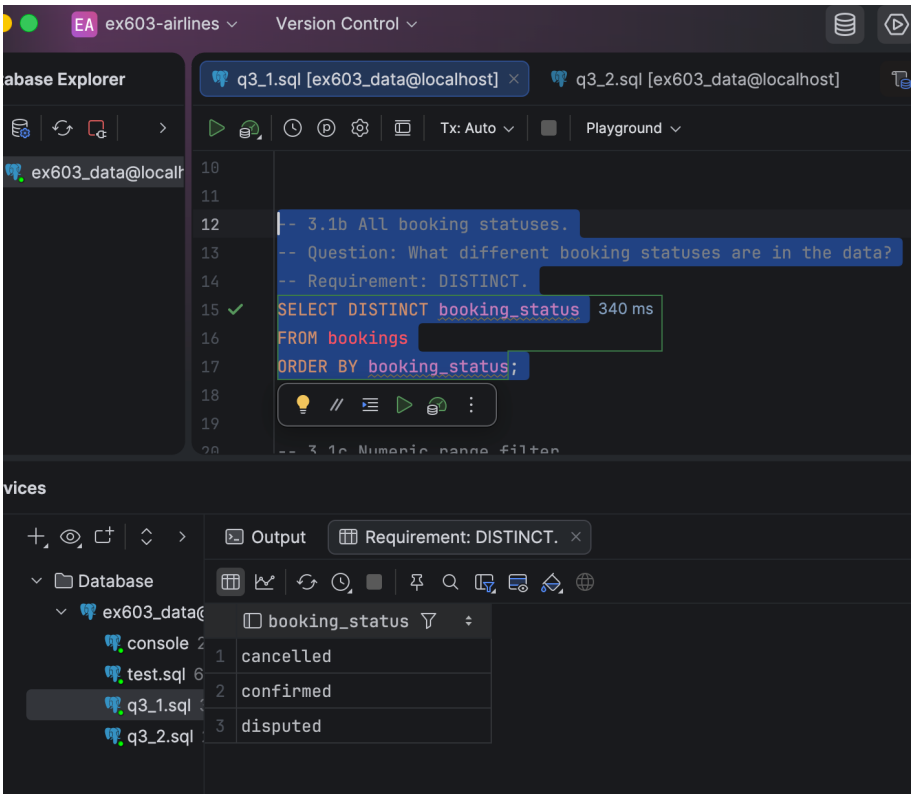
Tim Gray

Assignment 3 – EX603

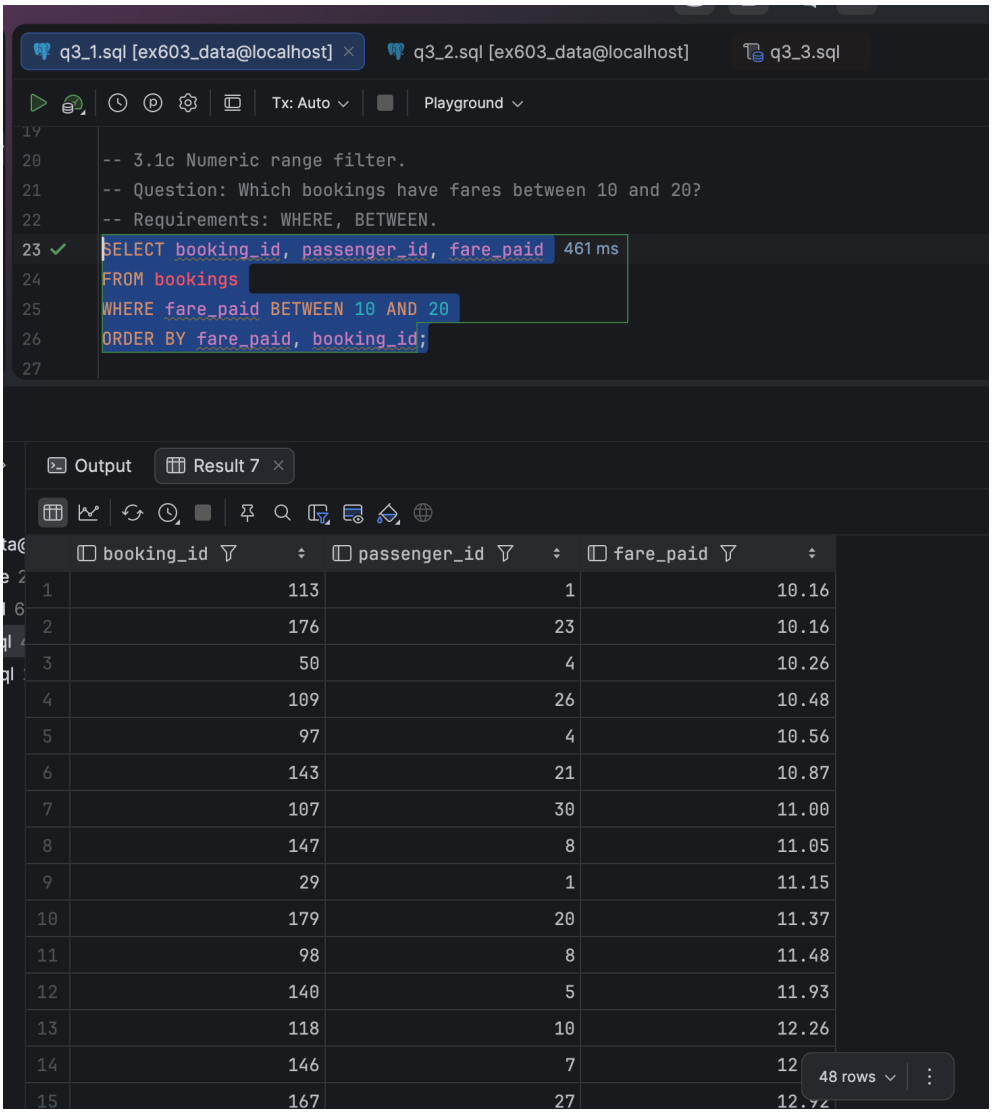
Query 3.1a



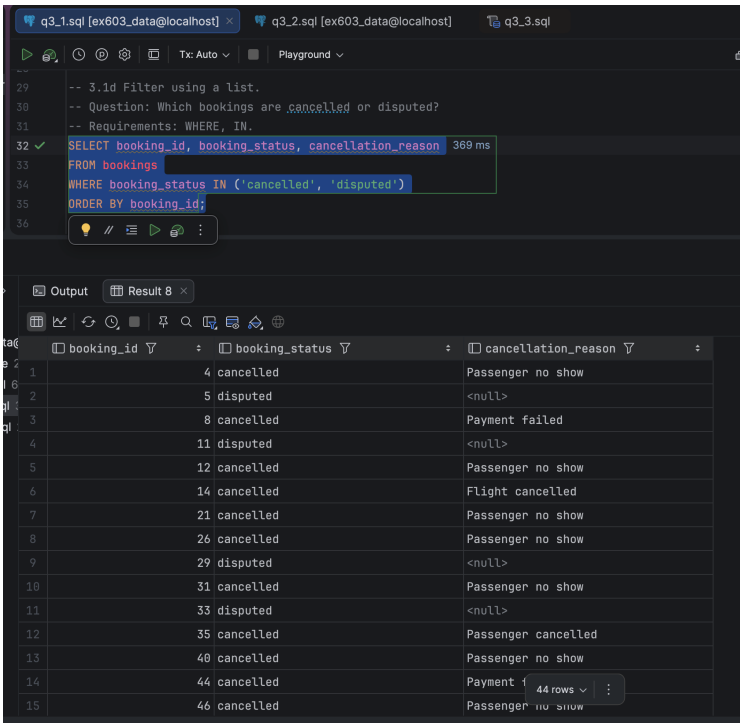
Query 3.1b


ex603-airlines
Version Control
abase Explorer
q3_1.sql [ex603_data@localhost]
q3_2.sql [ex603_data@localhost]
Tx: Auto
Playground
ex603_data@localh
10
11
12 -- 3.1b All booking statuses.
13 -- Question: What different booking statuses are in the data?
14 -- Requirement: DISTINCT.
15 SELECT DISTINCT booking_status 340 ms
16 FROM bookings
17 ORDER BY booking_status;
18
19
vices
Output
Requirement: DISTINCT.
Database
ex603_data@
console
test.sql
q3_1.sql
q3_2.sql
booking_status
1 cancelled
2 confirmed
3 disputed

Query 3.1c

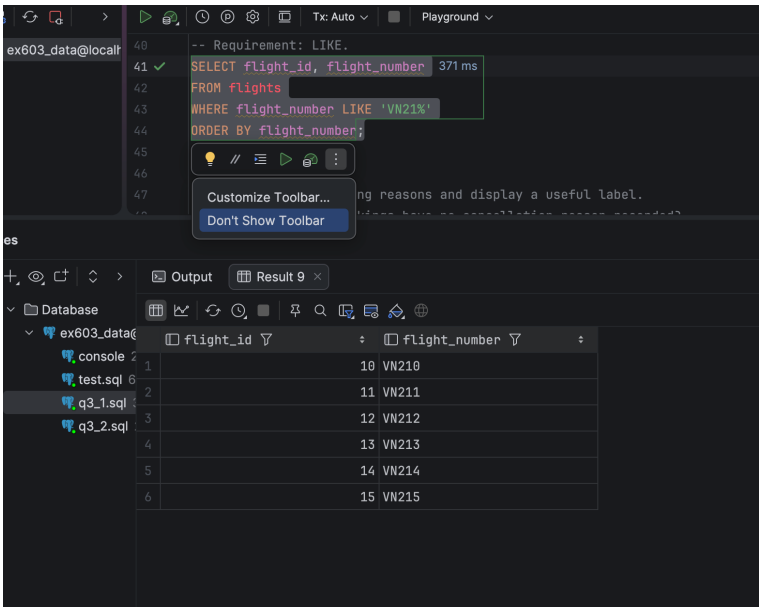

q3_1.sql [ex603_data@localhost]
q3_2.sql [ex603_data@localhost]
q3_3.sql
Tx: Auto
Playground
-- 3.1c Numeric range filter.
-- Question: Which bookings have fares between 10 and 20?
-- Requirements: WHERE, BETWEEN.
SELECT booking_id, passenger_id, fare_paid
461 ms
FROM bookings
WHERE fare_paid BETWEEN 10 AND 20
ORDER BY fare_paid, booking_id;
Output
Result 7
booking_id
passenger_id
fare_paid
1 113 1 10.16
2 176 23 10.16
3 50 4 10.26
4 109 26 10.48
5 97 4 10.56
6 143 21 10.87
7 107 30 11.00
8 147 8 11.05
9 29 1 11.15
10 179 20 11.37
11 98 8 11.48
12 140 5 11.93
13 118 10 12.26
14 146 7
15 167 27
48 rows

Query 3.1d



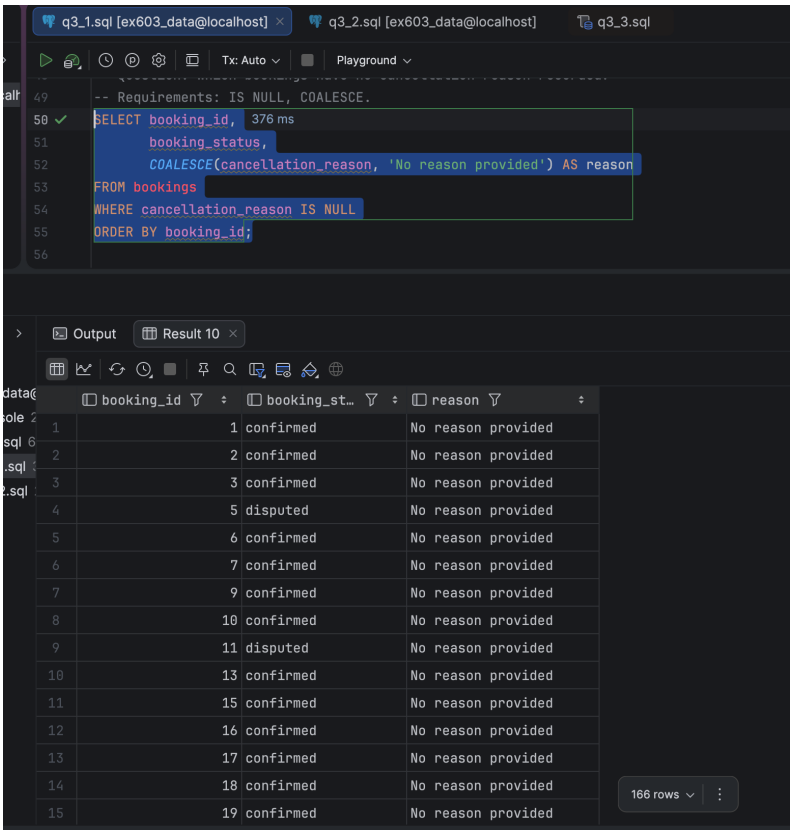
	booking_id	booking_status	cancellation_reason
1	4	cancelled	Passenger no show
2	5	disputed	<null>
3	8	cancelled	Payment failed
4	11	disputed	<null>
5	12	cancelled	Passenger no show
6	14	cancelled	Flight cancelled
7	21	cancelled	Passenger no show
8	26	cancelled	Passenger no show
9	29	disputed	<null>
10	31	cancelled	Passenger no show
11	33	disputed	<null>
12	35	cancelled	Passenger cancelled
13	40	cancelled	Passenger no show
14	44	cancelled	Payment f
15	46	cancelled	Passenger no show

Query 3.1e

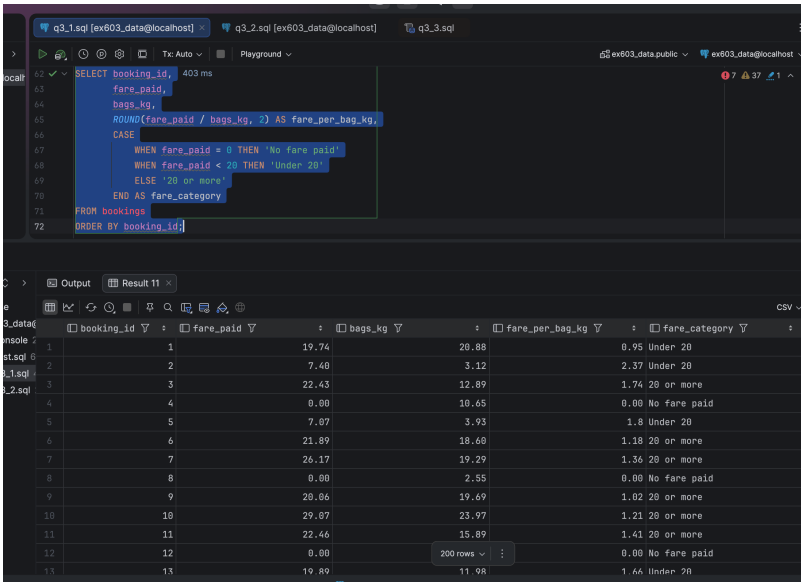


	flight_id	flight_number
1	10	VN210
2	11	VN211
3	12	VN212
4	13	VN213
5	14	VN214
6	15	VN215

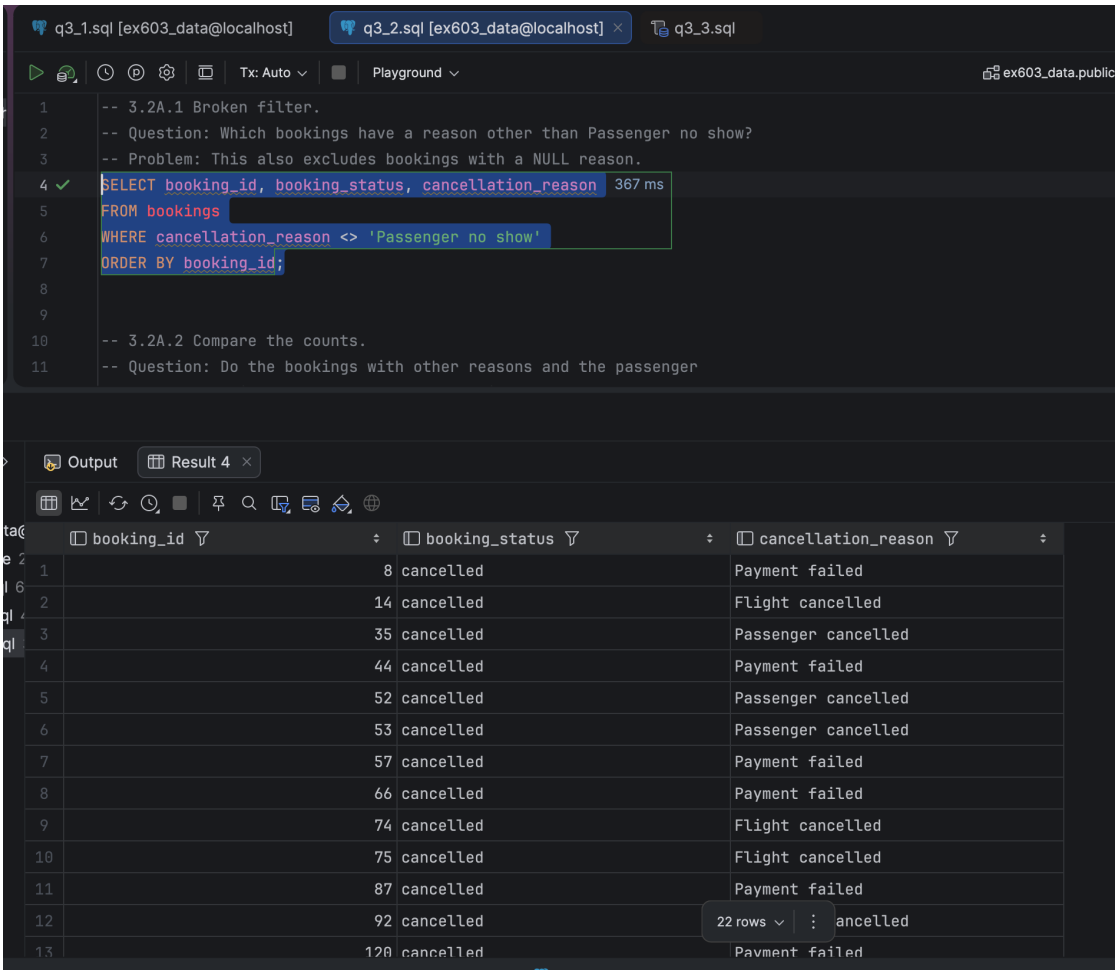
Query 3.1f

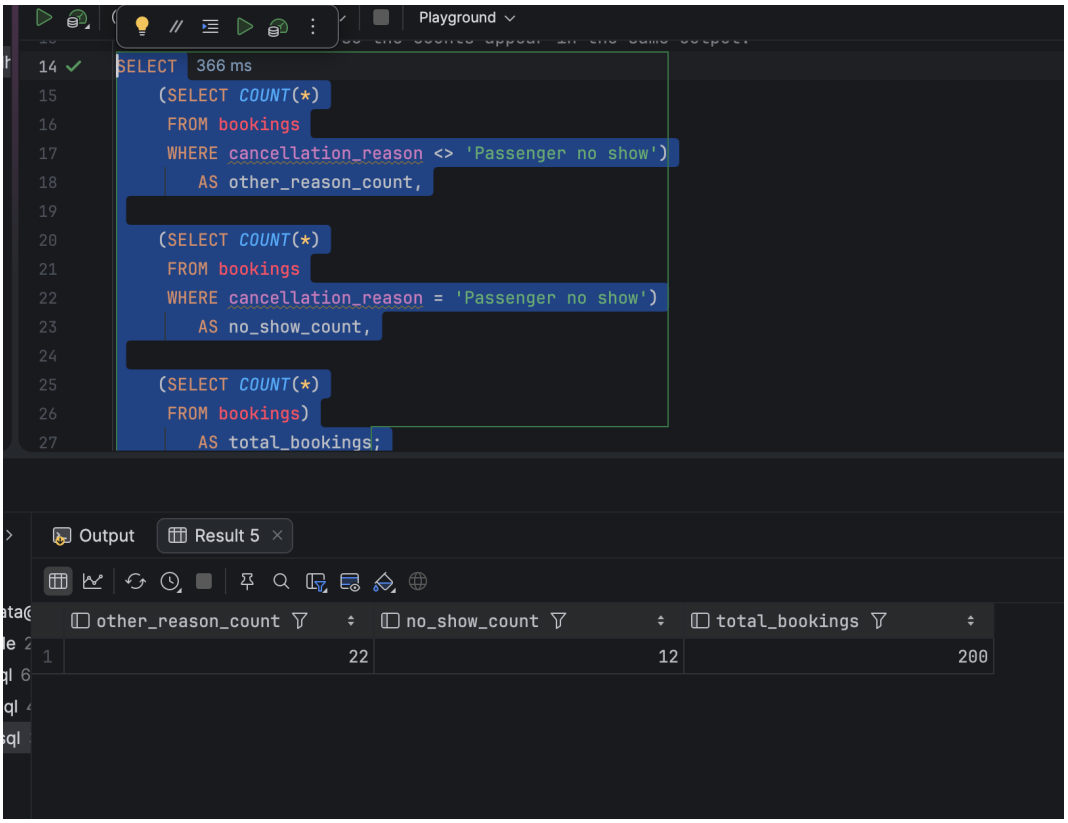


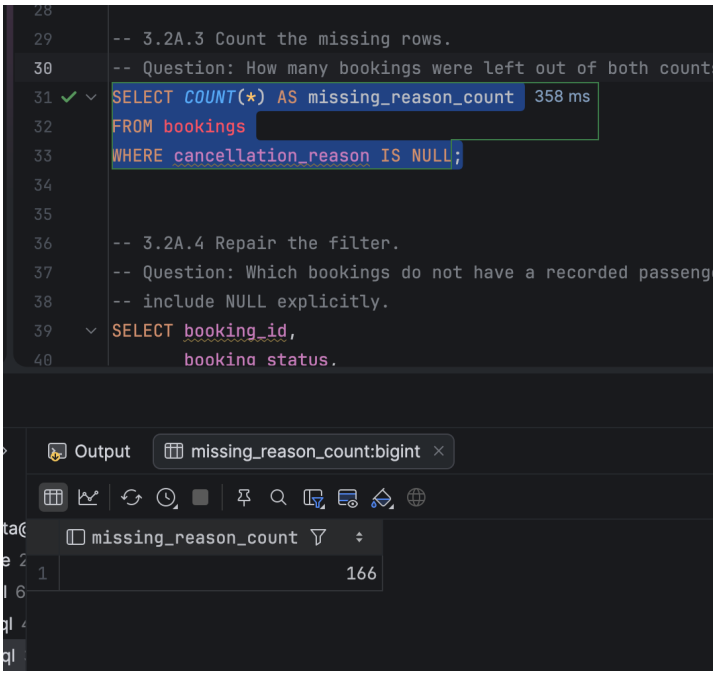
Query 3.1g

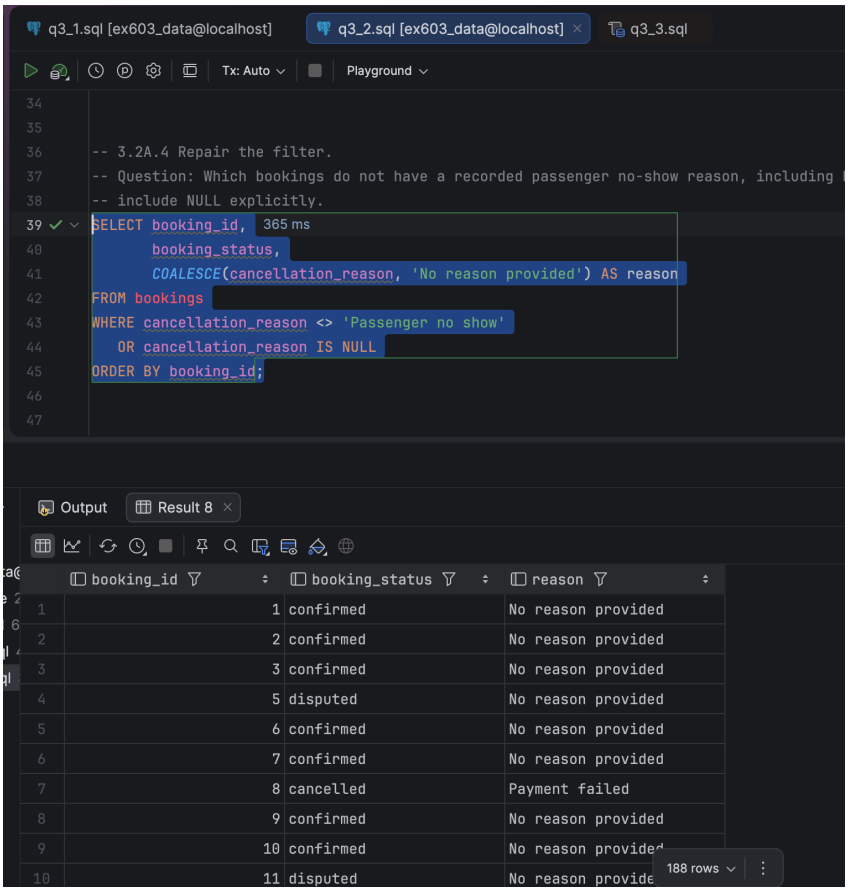


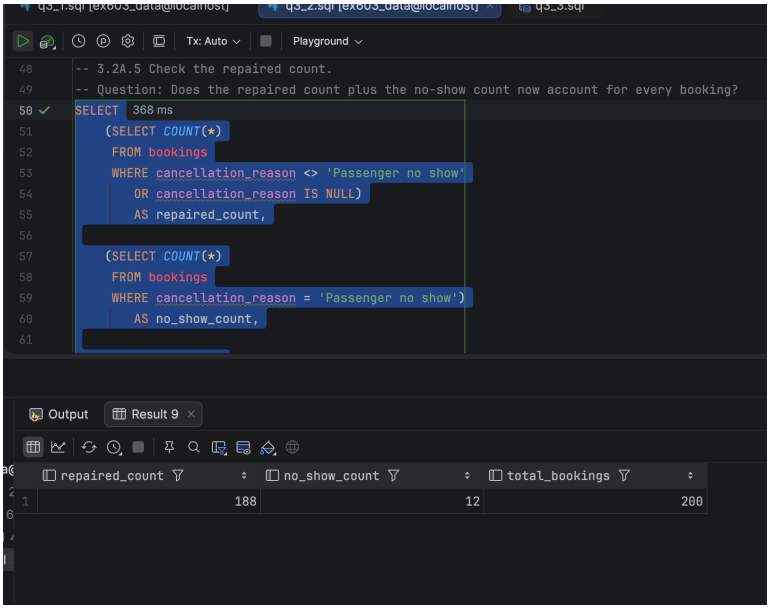
Queries 3.2 Part A


q3_1.sql [ex603_data@localhost]
q3_2.sql [ex603_data@localhost]
q3_3.sql
Tx: Auto
Playground
ex603_data.public
-- 3.2A.1 Broken filter.
-- Question: Which bookings have a reason other than Passenger no show?
-- Problem: This also excludes bookings with a NULL reason.
SELECT booking_id, booking_status, cancellation_reason
367 ms
FROM bookings
WHERE cancellation_reason <> 'Passenger no show'
ORDER BY booking_id;
-- 3.2A.2 Compare the counts.
-- Question: Do the bookings with other reasons and the passenger
Output
Result 4
booking_id
booking_status
cancellation_reason
1 8 cancelled Payment failed
2 14 cancelled Flight cancelled
3 35 cancelled Passenger cancelled
4 44 cancelled Payment failed
5 52 cancelled Passenger cancelled
6 53 cancelled Passenger cancelled
7 57 cancelled Payment failed
8 66 cancelled Payment failed
9 74 cancelled Flight cancelled
10 75 cancelled Flight cancelled
11 87 cancelled Payment failed
12 92 cancelled
22 rows
13 120 cancelled Payment failed

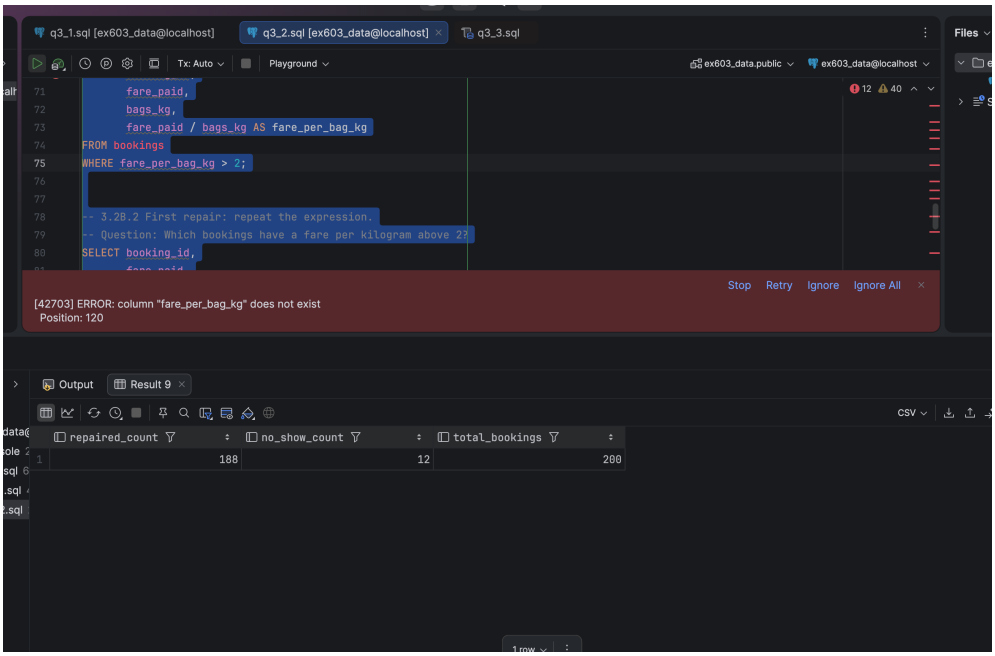

Playground
SELECT 366 ms
(SELECT COUNT(*)
FROM bookings
WHERE cancellation_reason <> 'Passenger no show')
AS other_reason_count,
(SELECT COUNT(*)
FROM bookings
WHERE cancellation_reason = 'Passenger no show')
AS no_show_count,
(SELECT COUNT(*)
FROM bookings)
AS total_bookings;
Output
Result 5
other_reason_count
no_show_count
total_bookings
1
22
12
200


-- 3.2A.3 Count the missing rows.
-- Question: How many bookings were left out of both count
SELECT COUNT(*) AS missing_reason_count 358 ms
FROM bookings
WHERE cancellation_reason IS NULL;
-- 3.2A.4 Repair the filter.
-- Question: Which bookings do not have a recorded passeng
-- include NULL explicitly.
SELECT booking_id,
booking_status,
Output
missing_reason_count:bigint
missing_reason_count
1
166


q3_1.sql [ex603_data@localhost]
q3_2.sql [ex603_data@localhost]
q3_3.sql
Tx: Auto
Playground
-- 3.2A.4 Repair the filter.
-- Question: Which bookings do not have a recorded passenger no-show reason, including
-- include NULL explicitly.
SELECT booking_id, 365 ms
booking_status,
COALESCE(cancellation_reason, 'No reason provided') AS reason
FROM bookings
WHERE cancellation_reason <> 'Passenger no show'
OR cancellation_reason IS NULL
ORDER BY booking_id;
Output
Result 8
booking_id
booking_status
reason
1 1 confirmed No reason provided
2 2 confirmed No reason provided
3 3 confirmed No reason provided
4 5 disputed No reason provided
5 6 confirmed No reason provided
6 7 confirmed No reason provided
7 8 cancelled Payment failed
8 9 confirmed No reason provided
9 10 confirmed No reason provide
10 11 disputed No reason provide
188 rows


Tx: Auto
Playground
-- 3.2A.5 Check the repaired count.
-- Question: Does the repaired count plus the no-show count now account for every booking?
SELECT 368 ms
(SELECT COUNT(*)
FROM bookings
WHERE cancellation_reason <> 'Passenger no show'
OR cancellation_reason IS NULL)
AS repaired_count,
(SELECT COUNT(*)
FROM bookings
WHERE cancellation_reason = 'Passenger no show')
AS no_show_count,
Output
Result 9
repaired_count
no_show_count
total_bookings
1 188 12 200

Queries 3.2B


q3_1.sql [ex603_data@localhost]
q3_2.sql [ex603_data@localhost]
q3_3.sql
Files
Tx: Auto
Playground
ex603_data.public
ex603_data@localhost
fare_paid,
bags_kg,
fare_paid / bags_kg AS fare_per_bag_kg
FROM bookings
WHERE fare_per_bag_kg > 2;
-- 3.2B.2 First repair: repeat the expression.
-- Question: Which bookings have a fare per kilogram above 2?
SELECT booking_id,
Stop
Retry
Ignore
Ignore All
[42703] ERROR: column "fare_per_bag_kg" does not exist
Position: 120
Output
Result 9
CSV
repaired_count
no_show_count
total_bookings
1
188
12
200
1 row