


## JSON + Config File Builder Demo

The virtual installation loads from a configuration file describing the start states of each element. The configuration file is JSON. This tool provides a simple means of loading, building, and saving a JSON based configuration file locally.

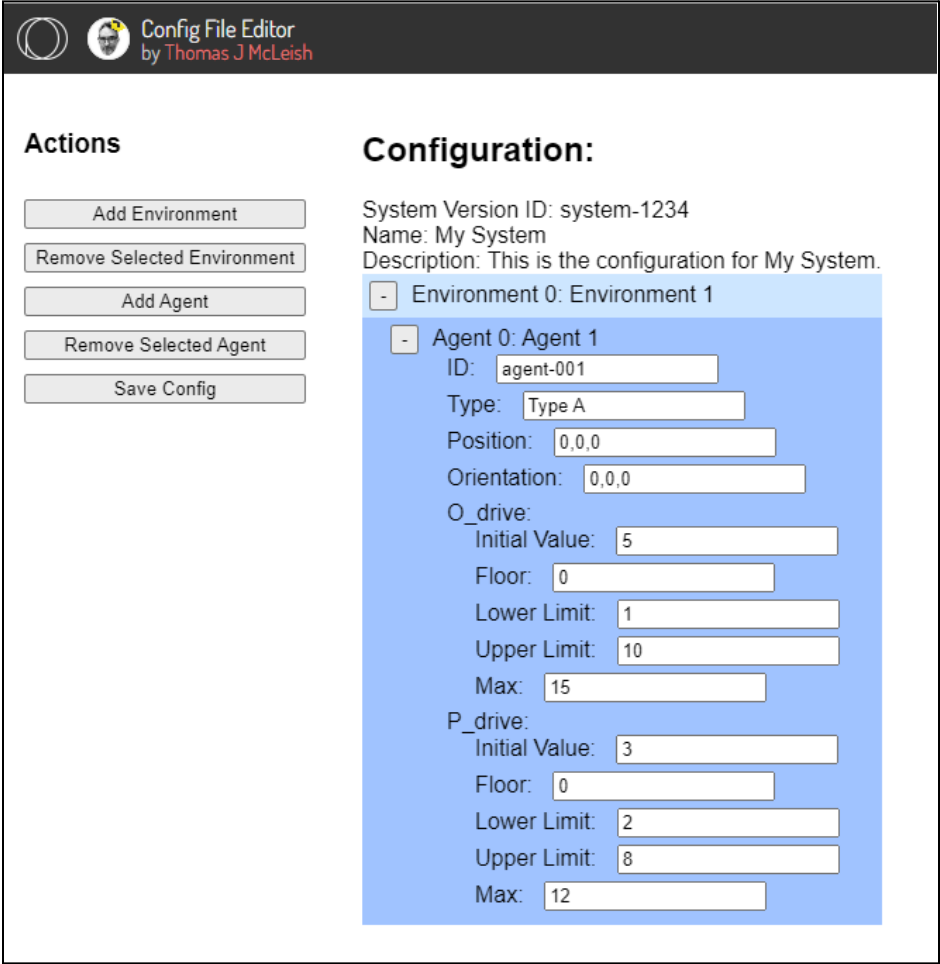

The screenshot shows the 'Config File Editor' application by Thomas J McLeish. It features a dark header with a logo and the title. The main interface is divided into two panels. The left panel, titled 'Actions', contains five buttons: 'Add Environment', 'Remove Selected Environment', 'Add Agent', 'Remove Selected Agent', and 'Save Config'. The right panel, titled 'Configuration:', displays system information and a hierarchical tree of configuration elements. The system information includes 'System Version ID: system-1234', 'Name: My System', and 'Description: This is the configuration for My System.' The configuration tree shows 'Environment 0: Environment 1' expanded, containing 'Agent 0: Agent 1'. This agent has several fields: 'ID' (agent-001), 'Type' (Type A), 'Position' (0,0,0), 'Orientation' (0,0,0), 'O\_drive' (Initial Value: 5, Floor: 0, Lower Limit: 1, Upper Limit: 10, Max: 15), and 'P\_drive' (Initial Value: 3, Floor: 0, Lower Limit: 2, Upper Limit: 8, Max: 12).

**Config File Editor**  
by Thomas J McLeish

**Actions**

- Add Environment
- Remove Selected Environment
- Add Agent
- Remove Selected Agent
- Save Config

**Configuration:**

System Version ID: system-1234  
Name: My System  
Description: This is the configuration for My System.

- Environment 0: Environment 1
  - Agent 0: Agent 1
    - ID: agent-001
    - Type: Type A
    - Position: 0,0,0
    - Orientation: 0,0,0
    - O\_drive:
      - Initial Value: 5
      - Floor: 0
      - Lower Limit: 1
      - Upper Limit: 10
      - Max: 15
    - P\_drive:
      - Initial Value: 3
      - Floor: 0
      - Lower Limit: 2
      - Upper Limit: 8
      - Max: 12

<https://openprocessing.org/sketch/2326861>