

Zybook Material is only intended for students learning. You are prohibited to distribute it largely or share it with any individual not registered in the CSSD1202 course.

4.8 LAB: News article (CSS)



5 Things to Know About Rattlesnakes and Their Babies

UA College of Pharmacy | Aug. 6, 2014

Arguably, snake season is year-round in Arizona, a state known for its rattlers. But baby rattlesnakes are born in July and August, making these two months especially dangerous for hikers, gardeners, children and others at high risk of exposure to rattlesnake bites.



So far this year, 74 rattlesnake bites to humans have been reported to the Arizona Poison and Drug Information Center. Based at the University of Arizona College of Pharmacy, the center serves the entire state of Arizona with the exception of Maricopa County, providing free and confidential poison and medication information to callers around the clock.

Specialists answering the phones at the center regularly receive calls from Arizonans of all ages who don't realize they were bitten by a rattler. The poison center urges anyone who feels a mysterious sting, pinch or bite while outdoors to immediately call the center at 800-222-1222.

"We will ask a few questions that will help you either identify possible snakebite or eliminate it," said Keith Boesen, director of the Arizona Poison and Drug Information Center. "With snakebite, the sooner the medical treatment, the better the outcome, so calling us right away can make a very big difference for the victims and the medical teams treating them."

The center advises anyone who might come cross paths with rattlesnakes to be aware of these five things:

1. Baby rattlesnakes range in length from 6 to 12 inches and are easily camouflaged by brush and grass.
2. Baby rattlesnakes are rattleless until they first shed their skins, so there will be no infamous "chica-chica" sound before they strike.
3. Despite their impish size, baby snakes have enough venom to be very dangerous if they bite a human.
4. Adult rattlesnakes do not always rattle an audible warning before or while they are biting.
5. It's a good idea to call the poison center if you notice an unidentified small cut or wound, even if you feel no pain. With the lack of telltale rattle warning, people can be bitten without knowing what has happened until they notice their symptoms and attribute them to a snakebite.

Share: [Twitter](#) [Facebook](#) [LinkedIn](#)

Add CSS rules to styles.css that matches the following styling:


- Both article's images styled with a width of 300px
- Article's `<h1>` element styled with:
 - 5px padding all around
 - Font family of Arial
 - Font size of 24px
 - Font color of white
 - Background color of red
- Selecting the id of author-name-and-date, style the author name and date with:
 - Font family of Arial
 - Font size of 12px
 - Font color of gray
- Article's text (`<p>` and `<ol>` elements) styled with:
 - Font family of Times New Roman
 - Font size of 16px
 - Font color of DarkSlateGray
- Article's share links (`<a>` elements) styled with:
 - Font family of Arial
 - Font size of 12px
 - Font color of blue

Note: Colors, font sizes, padding, etc. must be exact. The autograder will report colors as RGB values in the unit tests.

6.8 LAB: Media queries for a vacation website

Overview

The provided Mediterranean Vacations webpage is designed for a mobile screen, as shown below. The navigation links near the top to Featured Packages, Exotic Vacations, and Historic Locations all link to sections within the webpage. In this lab, you will add media queries so the webpage scales appropriately to larger viewports.

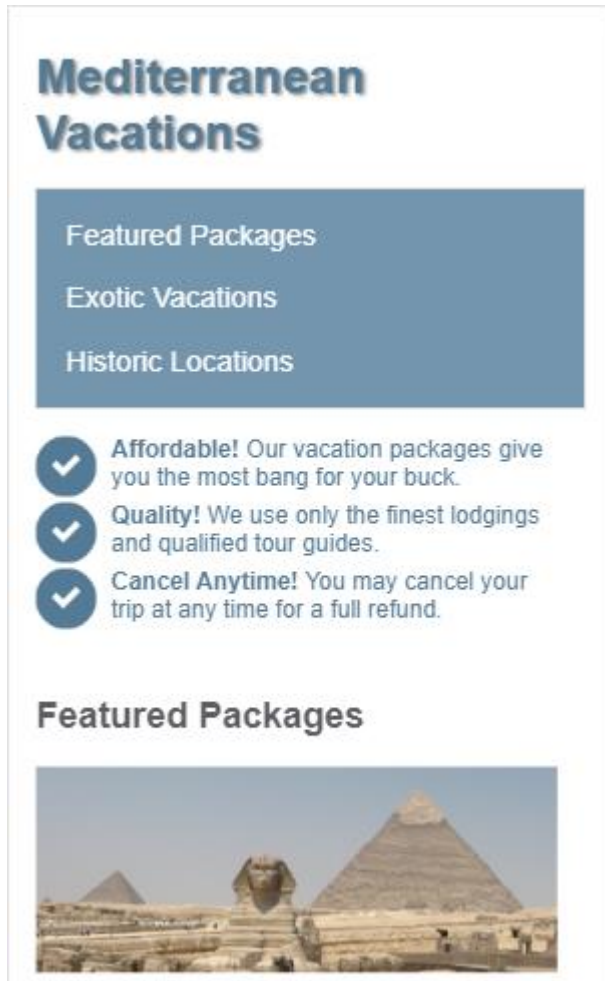

Step 1: Add 600px breakpoint (3 points)

Add a media query to styles.css that applies when the viewport's width is at least 600px. Use the .benefits-container selector to set flex-direction: row;

The screenshot below shows how the benefits change from being displayed in one column to being displayed in one row when the viewport is at least 600px wide.

Mediterranean Vacations

Featured Packages

Exotic Vacations

Historic Locations



Affordable! Our vacation packages give you the most bang for your buck.




Quality! We use only the finest lodgings and qualified tour guides.



Cancel Anytime! You may cancel your trip at any time for a full refund.

Featured Packages



Step 2: Add 700px breakpoint (3 points)

Add a media query that applies when the viewport's width is at least 700px. Use the `nav li` selector to set `display: inline`; so the three navigation links now appear next to each other. Also use the `header > h1` selector to make the `h1` font size 3rem instead of 2rem.

The screenshot below shows how the "Mediterranean Vacations" font size increases and the navigation links appear on a single row when the viewport is at least 700px wide.

Mediterranean Vacations

Featured Packages

Exotic Vacations

Historic Locations



Affordable! Our vacation packages give you the most bang for your buck.



Quality! We use only the finest lodgings and qualified tour guides.



Cancel Anytime! You may cancel your trip at any time for a full refund.

Featured Packages



Step 3: Add 800px breakpoint (4 points)

Add a media query that applies when the viewport's width is at least 800px:

- Use the .vacation-container img selector to change the image width to 50vw so vacation images occupy half the viewport's width.
- Use the .vacation-container selector to make the vacation descriptions appear to the right of the vacation images instead of underneath.
- Use the .vacation-container > div selector to add a 20px margin between the vacation descriptions and images.

The screenshot below shows how the vacation image and text now appear next to each other when the viewport is at least 800px wide.

Featured Packages



Egypt

Egypt is a land of enduring beauty and rich culture. Explore the capital city of Cairo, the Great Pyramids of Giza, and the iconic Great Sphinx!

Packages include airfare, lodging, and several guided tours!

Exotic Vacations



Greece

Enjoy the scenic, peaceful Greek island of Santorini. Take a cruise, soak in the sun, and explore the idyllic villages that sit atop the cliffs!

Packages include airfare, overnight cruises, and lodging!


Photos by Frank McCown used with permission.

8.17 LAB: Tic-Tac-Toe (JavaScript)

Overview

In this lab, you will implement a Tic-Tac-Toe game with JavaScript. The human is X, and the computer is O. A "New game" button starts a new game.

Tic-Tac-Toe

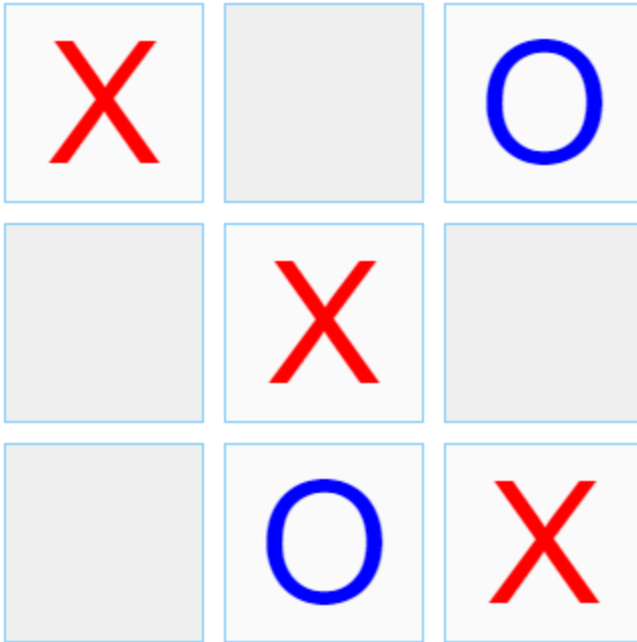

You win!

New game

Step 1: Investigate the project

The project contains HTML, CSS, and JavaScript files. The **index.html** file contains all needed page elements for a game of Tic-Tac-Toe:

- A div with ID gameBoard and 9 buttons forms the game board. CSS in tictactoe.css converts the div and buttons into a 3x3 grid.
- A paragraph with ID turnInfo, initially containing text "TURN INFO", indicates the turn is the player's or computer's.
- A "New game" button with ID newGameButton allows the player to clear the board and start a new game.

The **tictactoe.css** file declares .x and .o rules to set the X and O button colors. Other CSS rules style the grid and buttons.

The **tictactoe.js** script has six declarations:

- **playerTurn**: Boolean variable that is true when the turn belongs to the player and false when the turn belongs to the computer.
- **computerMoveTimeout**: ID of an active timeout for the computer's move, or 0 if no such timeout exists.
- **gameStatus**: Object that contains four possible game statuses. The **checkForWinner()** function returns the appropriate game status.
- **domLoaded()**: Function that is called when the DOM loads to start the game. Events for the "New game" button click and game board button clicks are registered. Then **newGame()** is called to start the game. The **domLoaded()** function is implemented for you and requires no alteration.
- **getGameBoardButtons()**: Function that returns an array of the 9 `<button>` elements from the game board. The first 3 elements are the top row, the next 3 the middle row, and the last 3 are the bottom row. The **getGameBoard()** function is implemented for you and requires no alteration.
- **checkForWinner()**: Function that returns a **gameStatus** value indicating if the human has won, if the computer has won, if a draw occurs, or if more moves are available.

Step 2: Implement newGame() (2 points)

Implement the **newGame()** function to do the following:

1. Use **clearTimeout()** to clear the computer's move timeout and then set **computerMoveTimeout** back to 0.
2. Loop through all game board buttons and set the text content of each to an empty string. Also remove the class name and disabled attribute. The disabled attribute prevents the user from clicking the button, but all the buttons should be clickable when starting a new game.
3. Allow the player to take a turn by setting **playerTurn** to true.
4. Set the text of the turn information paragraph to "Your turn".

Step 3: Implement boardButtonClicked() (2 points)

Implement the **boardButtonClicked()** function to do the following:

- If **playerTurn** is true:
 1. Set the button's text content to "X".
 2. Add the "x" class to the button.

3. Set the button's disabled attribute to true so the button cannot be clicked again.
4. Call `switchTurn()` so the computer can take a turn.

Step 4: Implement `switchTurn()` (3 points)

Implement the `switchTurn()` function to do the following:

- Call `checkForWinner()` to determine the game's status.
- If more moves are left, do the following:
 1. If switching from the player's turn to the computer's turn, use `setTimeout()` to call `makeComputerMove()` after 1 second (1000 milliseconds). Assign the return value of `setTimeout()` to `computerMoveTimeout`. The timeout simulates the computer "thinking", and prevents the nearly-instant response to each player move that would occur from a direct call to `makeComputerMove()`.
 2. Toggle `playerTurn`'s value from false to true or from true to false.
 3. Set the turn information paragraph's text content to "Your turn" if `playerTurn` is true, or "Computer's turn" if `playerTurn` is false.
- In the case of a winner or a draw game, do the following:
 1. Set `playerTurn` to false to prevent the user from being able to place an X after the game is over.
 2. If the human has won, display the text "You win!" in the turn info paragraph.
 3. If the computer has won, display the text "Computer wins!" in the turn info paragraph.
 4. If the game is a draw, display the text "Draw game" in the turn info paragraph.

Step 5: Implement `makeComputerMove()` (3 points)

Implement the `makeComputerMove()` function to do the following:

1. Choose a random, available button, and set the button's text content to "O".
2. Add the "o" class to the button.
3. Set the button's disabled attribute to true.
4. Call `switchTurn()` at the end of the function to switch back to the player's turn.