




A One recorded state, three descriptions, one shared engine

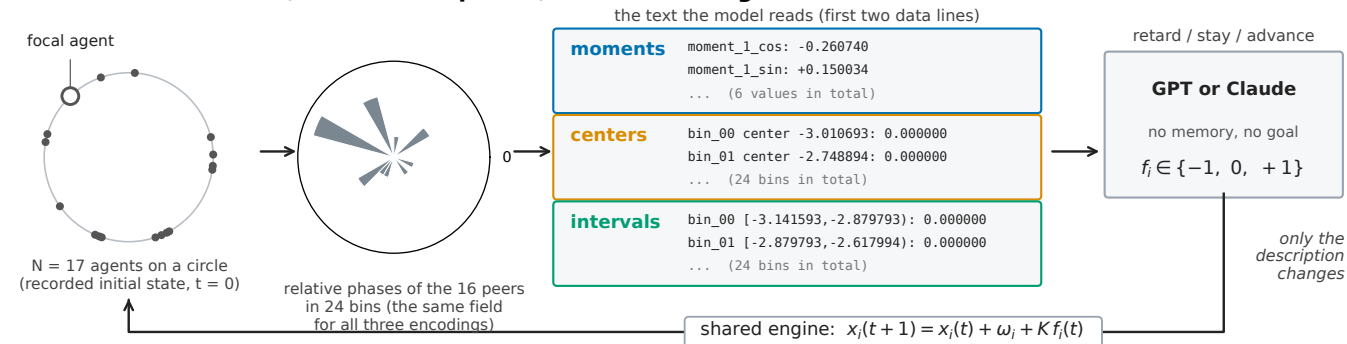


B GPT, K = 0.15, seed 0: phase configurations

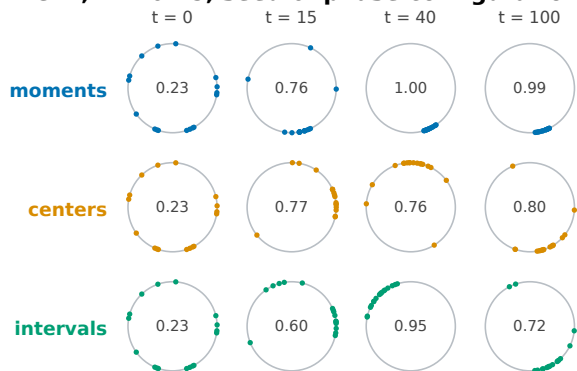


C Claude, K = 0.15, seed 0: phase configurations

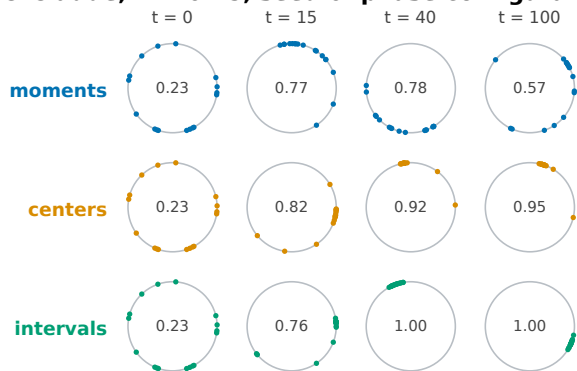


D GPT, K = 0.15: six matched seeds

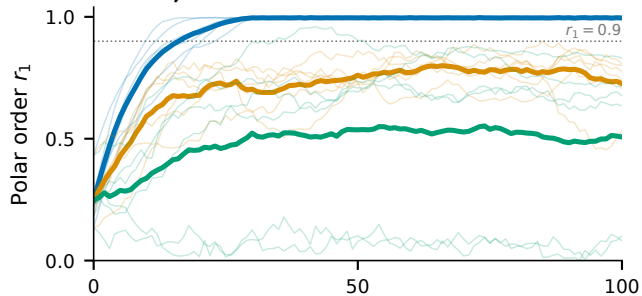


E Claude, K = 0.15: six matched seeds

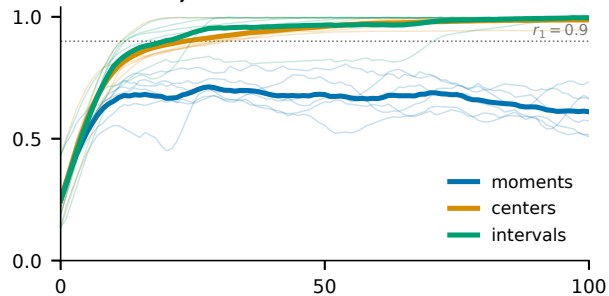

F Final order per seed; counts with $r_1(T) \geq 0.9$

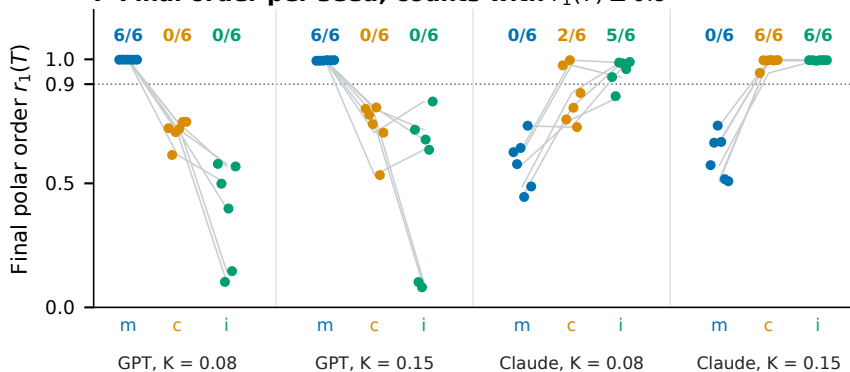

G Two-cluster tendency

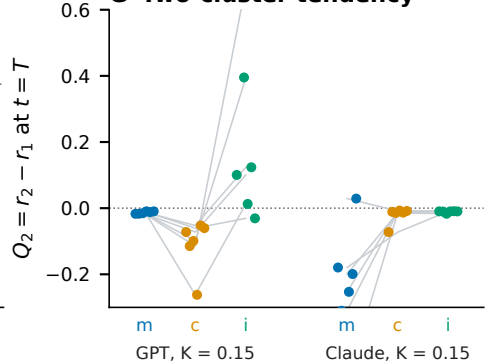

K = 0 control: with the coupling term removed, the three encodings produced identical r_1, r_2, r_3 trajectories from every shared seed in both models (exact equality of the recorded series), although their action distributions still differed.