


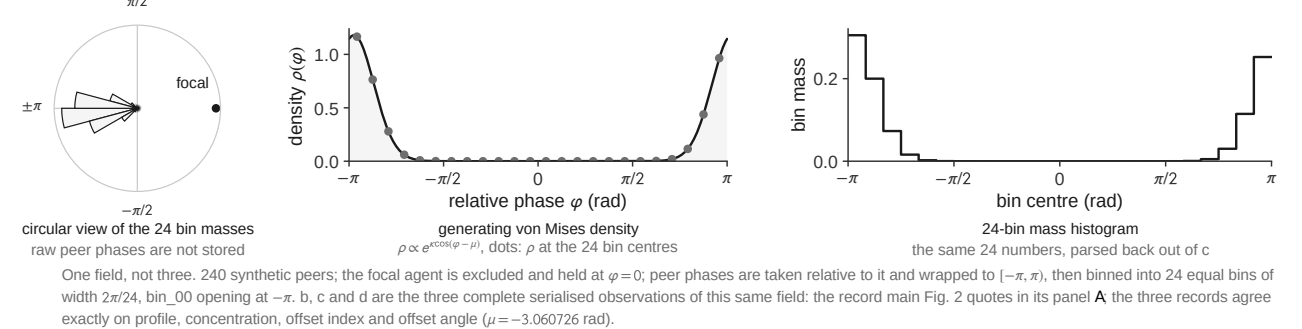

Prompt contract

lines 1 and 3–9 are byte-identical in b, c and d; only lines 2 and 10 differ, so all three are given. The user message is exactly these ten lines followed by the map's payload column below.

1 You are an interaction operator for a phase on a circle.
2 **moments** The values are the first three normalized circular moments of the distribution of other phases relative to you.
2 **centers** The table gives normalized relative-phase mass at 24 circular bin centers in radians.
2 **intervals** The table gives the normalized distribution of other phases relative to you in radians.
3 Negative relative phase is behind you; positive relative phase is ahead of you.
4 Choose one social correction in response to this distribution:
5 - "advance": move in the positive phase direction
6 - "stay": apply no social correction
7 - "retard": move in the negative phase direction
8 Use only the relative distribution below. Return exactly one JSON object and no other text.
9 Required schema: {"social_action": "advance|stay|retard"}
10 **moments** Relative phase distribution as circular moments:
10 **centers** Relative phase distribution by bin center:
10 **intervals** Relative phase distribution:

B Full moments observation

789 characters

moment_1_cos: -0.939609
moment_1_sin: -0.076149
moment_2_cos: +0.780197
moment_2_sin: +0.127295
moment_3_cos: -0.574034
moment_3_sin: -0.142058

lines 11–16, 6 numeric values. Harmonics $m=1, 2, 3$ in order; within each harmonic the real (cos) component precedes the imaginary (sin) one. Signed, six decimals, fixed width. No per-bin mass is sent.

C Full centers observation

1429 characters

bin_00	center	-3.010693:	0.305277
bin_01	center	-2.748894:	0.200024
bin_02	center	-2.487094:	0.073105
bin_03	center	-2.225295:	0.015962
bin_04	center	-1.963495:	0.002310
bin_05	center	-1.701696:	0.000253
bin_06	center	-1.439897:	0.000024
bin_07	center	-1.178097:	0.000002
bin_08	center	-0.916298:	0.000000
bin_09	center	-0.654498:	0.000000
bin_10	center	-0.392699:	0.000000
bin_11	center	-0.130900:	0.000000
bin_12	center	+0.130900:	0.000000
bin_13	center	+0.392699:	0.000000
bin_14	center	+0.654498:	0.000000
bin_15	center	+0.916298:	0.000000
bin_16	center	+1.178097:	0.000001
bin_17	center	+1.439897:	0.000006
bin_18	center	+1.701696:	0.000060
bin_19	center	+1.963495:	0.000603
bin_20	center	+2.225295:	0.005036
bin_21	center	+2.487094:	0.030167
bin_22	center	+2.748894:	0.114665
bin_23	center	+3.010693:	0.252505

lines 11–34, 48 numeric values. 24 bin centres ascending from $-\pi + \pi/24$, standard origin (no half-bin shift). Centre signed, mass unsigned, both six decimals. 8 of the 24 bins print 0.000000 (grey): mass below 5×10^{-7} , not an empty bin.

D Full intervals observation

1537 characters

bin_00	[-3.141593, -2.879793]:	0.305277
bin_01	[-2.879793, -2.617994]:	0.200024
bin_02	[-2.617994, -2.356194]:	0.073105
bin_03	[-2.356194, -2.094395]:	0.015962
bin_04	[-2.094395, -1.832596]:	0.002310
bin_05	[-1.832596, -1.570796]:	0.000253
bin_06	[-1.570796, -1.308997]:	0.000024
bin_07	[-1.308997, -1.047198]:	0.000002
bin_08	[-1.047198, -0.785398]:	0.000000
bin_09	[-0.785398, -0.523599]:	0.000000
bin_10	[-0.523599, -0.261799]:	0.000000
bin_11	[-0.261799, +0.000000]:	0.000000
bin_12	[+0.000000, +0.261799]:	0.000000
bin_13	[+0.261799, +0.523599]:	0.000000
bin_14	[+0.523599, +0.785398]:	0.000000
bin_15	[+0.785398, +1.047198]:	0.000000
bin_16	[+1.047198, +1.308997]:	0.000001
bin_17	[+1.308997, +1.570796]:	0.000006
bin_18	[+1.570796, +1.832596]:	0.000060
bin_19	[+1.832596, +2.094395]:	0.000603
bin_20	[+2.094395, +2.356194]:	0.005036
bin_21	[+2.356194, +2.617994]:	0.030167
bin_22	[+2.617994, +2.879793]:	0.114665
bin_23	[+2.879793, +3.141593]:	0.252505

lines 11–34, 72 numeric values. Half-open [lo, hi): the lower edge belongs to the bin, the upper edge does not. bin_00 (bold) opens at $-\pi$; bin_23 (bold) closes at $+\pi$, which wraps back onto $-\pi$. 8 of the 24 bins print 0.000000 (grey): mass below 5×10^{-7} , not an empty bin.