




A One recorded state, three descriptions, one shared engine

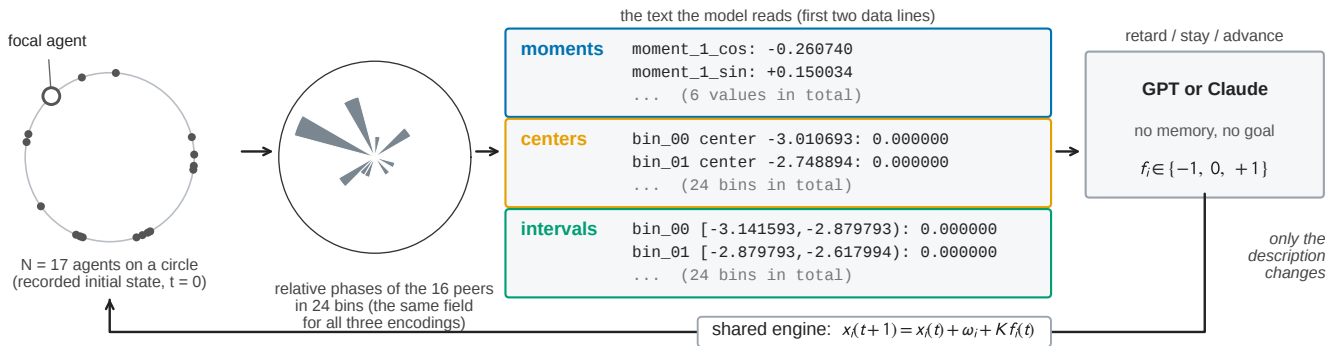


B GPT, $K = 0.15$, seed 0: phase configurations

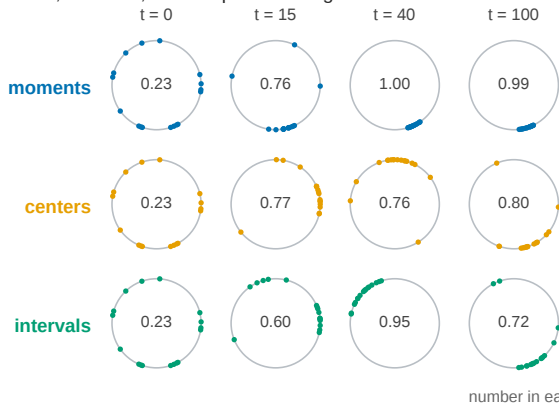


C Claude, $K = 0.15$, seed 0: phase configurations

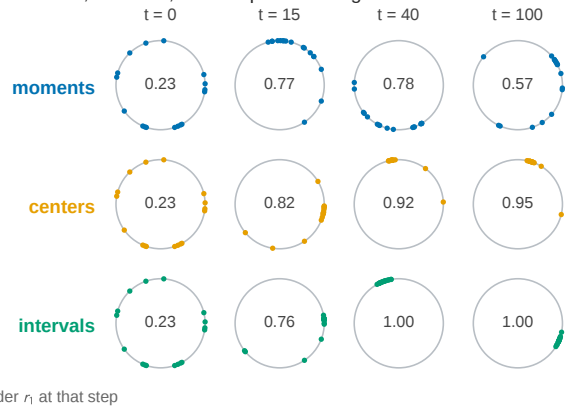


D GPT, $K = 0.15$: six matched seeds

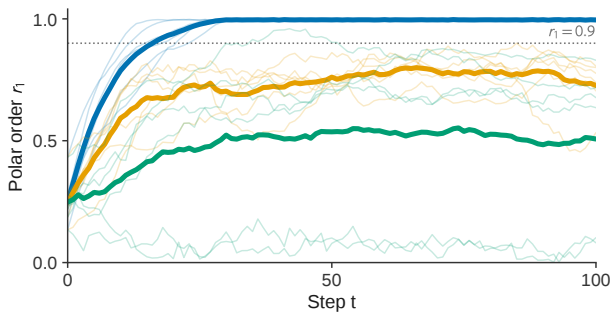


E Claude, $K = 0.15$: six matched seeds

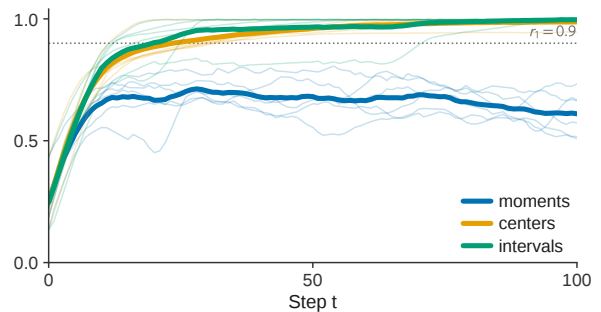

F Final order per seed; counts with $r_1(T) \geq 0.9$

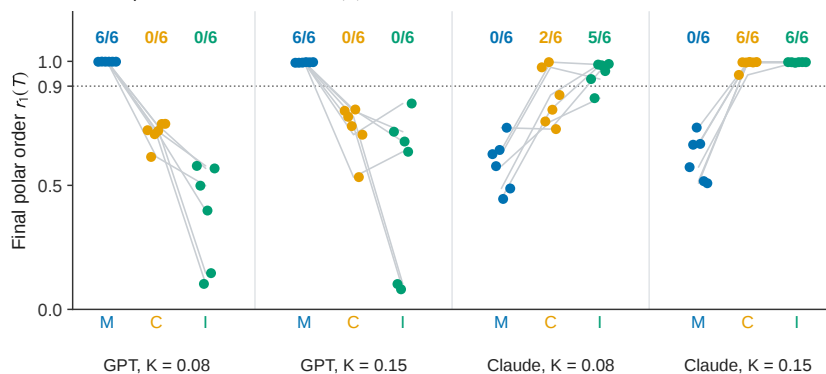

G Two-cluster tendency

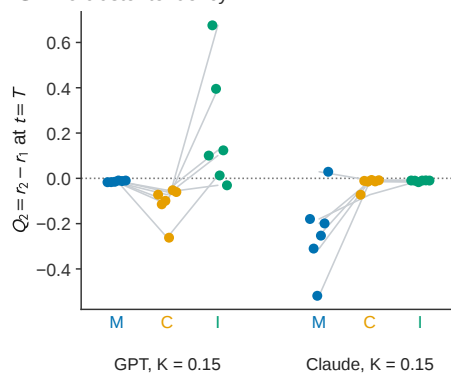

$K = 0$ control: with the coupling term removed, the three encodings produced identical r_1, r_2, r_3 trajectories from every shared seed in both models (exact equality of the recorded series), although their action distributions still differed.