




a Structured vs peer-global OOF

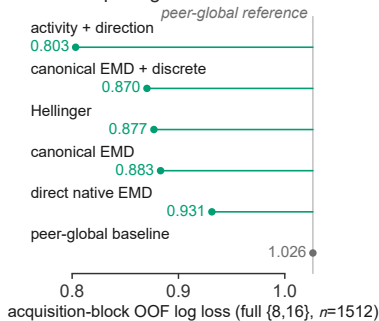

b Cluster-bootstrap improvement

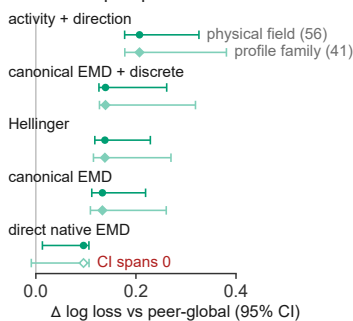


c Full vs peer-16 only



best structured vs peer-global log loss
full 0.803 vs 1.026
peer-16 0.834 vs 1.044
in-distribution compressibility survives
the peer-regime restriction


d Discrete-feature bake-off



Prespecified criterion: a candidate is adopted only if it clears the locked support gate (supported $\geq 40\%$, non-compressible $\leq 35\%$).
On the 433 active-feature-gap fields the discrete features move mean local d_{TV} from 0.149 to 0.157 and help 44% of fields: no tested feature cleared the gate.


e Local-support decomposition

f Sparse-antipodal disagreement

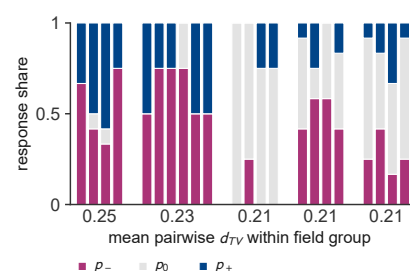


5 groups of sparse-antipodal fields with byte-identical serialized histograms (descriptor distance exactly 0); one bar per acquisition row, 4–12 responses per row. Neighbours exist; their empirical trinomials disagree.

g Exact-match locus

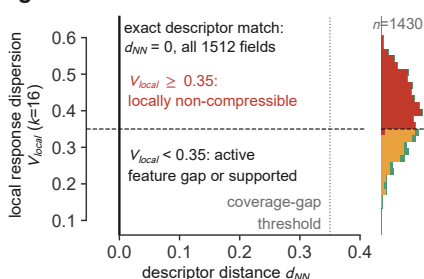

h Applicability-risk calibration

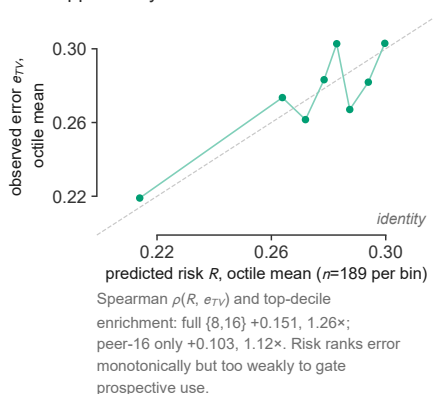

i Prespecified stop decision

active feature gap	$30.3\% \leq 35\%$	PASS
non-compressible	$64.4\% \leq 35\%$	FAIL
gap + non-compressible	$94.7\% \leq 45\%$	FAIL
supported	$5.3\% \geq 40\%$	FAIL
↓		
model gate (OOF)		PASS
support gate		FAIL
INT-3 prospective pilot		NO-GO
collective bundle freeze		no
paid authorization		no
STOP		
available finite-peer domain does not support reliable prospective transport under the tested descriptors and coverage		

Prespecified diagnosis rule: $d_{NN} > 0.35$ (no neighbour); else $V_{\text{local}} \geq 0.35$ (locally non-compressible); else high-stay fraction < 0.25 with active fraction ≥ 0.5 (active feature gap); else supported.