

intervals

observation map: every coupling, every seed, underlying main Fig. 4b

24-bin phase histogram, bin intervals to six decimals · $N = 17$ oscillators, 100 steps · 26 Claude cells

$$r_m = | \langle e^{im\theta} \rangle |$$


core seed

held-out seed


seed mean

core · 6 GPT-shared seeds

held-out · 4 new seeds

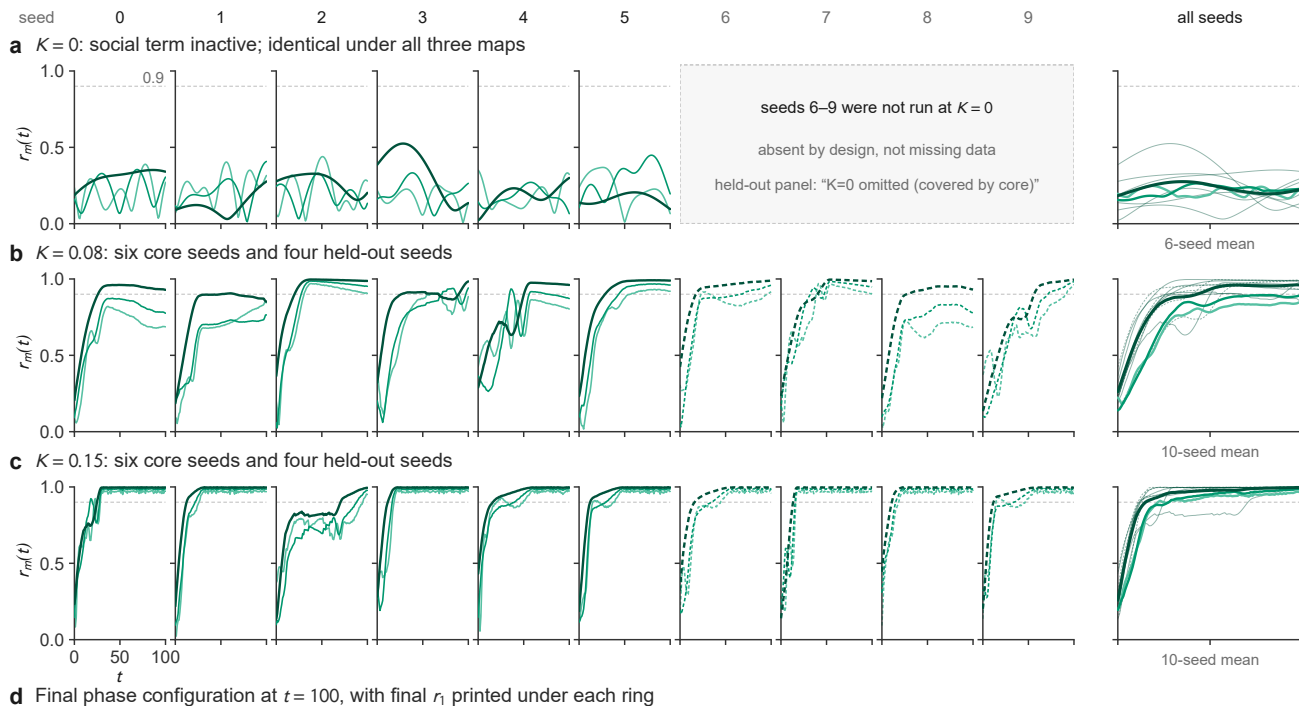

$K = 0$



seeds 6–9 were not run at $K = 0$
absent by design, not missing data
held-out panel: "K=0 omitted (covered by core)"


polar locked 0/6
terminal lock 0/6
mean final r_1 0.22

$K = 0.08$



polar locked 9/10
terminal lock 9/10
mean final r_1 0.96

$K = 0.15$



polar locked 10/10
terminal lock 10/10
mean final r_1 1.00

At $K = 0$ the social term is inactive, so all three observation maps drive identical trajectories (engine-matching control, $\max |\Delta r_m| = 0$).