


A Controlled-field protocol: one peer distribution rotated around the focal agent

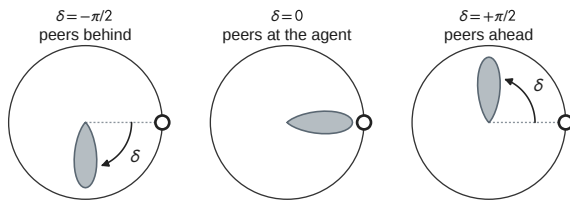

○ focal agent

■ peer density (von Mises)

→ rotation δ

Design


rotation δ
concentration κ
encodings
repeats
responses

36 values
2, 4, 6, 9, 12
M, C, I
24 per field × 2 blocks
25,920 per model family


Readout

$g(\delta) = p(\text{advance}) - p(\text{retard})$
 $g \approx a_0 + a_1 \sin \delta + b_1 \cos \delta + \dots$
 $a_1 > 0$: pull toward the peers
 b_1 : angular shift of the rule


B One field ($\kappa = 12$, $\delta = -0.25$), six rules

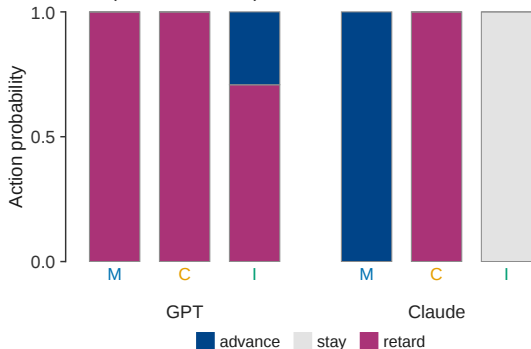

C GPT, $\kappa = 12$




D Claude, $\kappa = 12$




triangles: where the block-1 fit switches from retard to advance nearest $\delta = 0$


E GPT: $a_1 + i b_1$ across κ

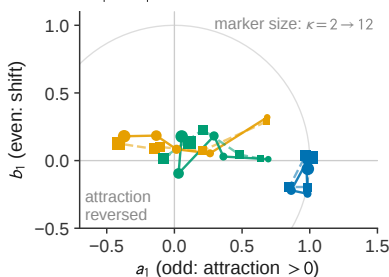


F Claude: $a_1 + i b_1$ across κ

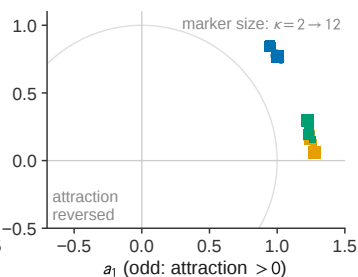


G Second harmonic R_2 across κ

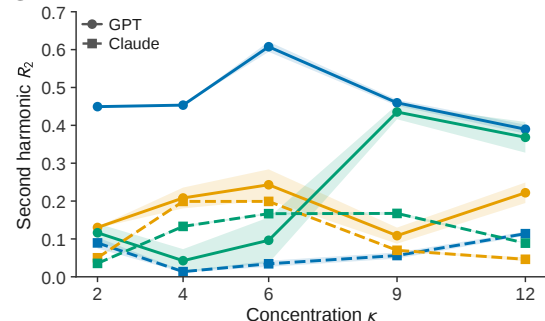


H GPT: activity vs ϵ

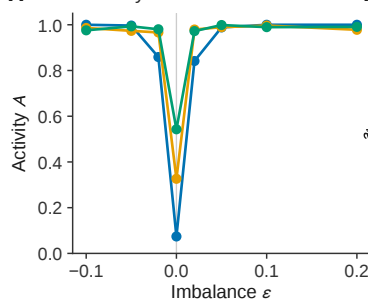

I GPT: attraction vs ϵ

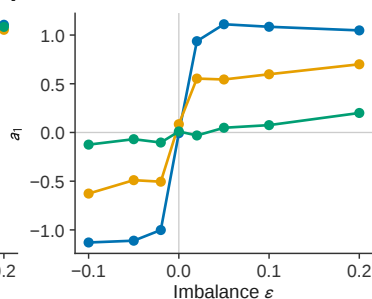

J GPT: d_{TV} , six field families

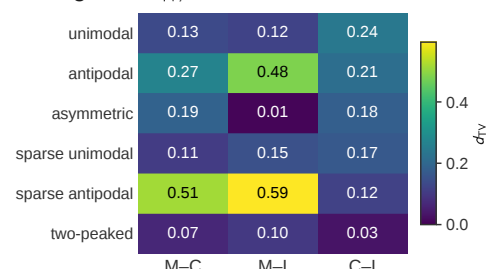

Fitted curves are clipped to $[-1, 1]$ for display; all coefficients come from the original unconstrained order-6 fits. Solid/circles: block 1; dashed/squares: block 2.