




a One recorded state, three descriptions, one shared engine

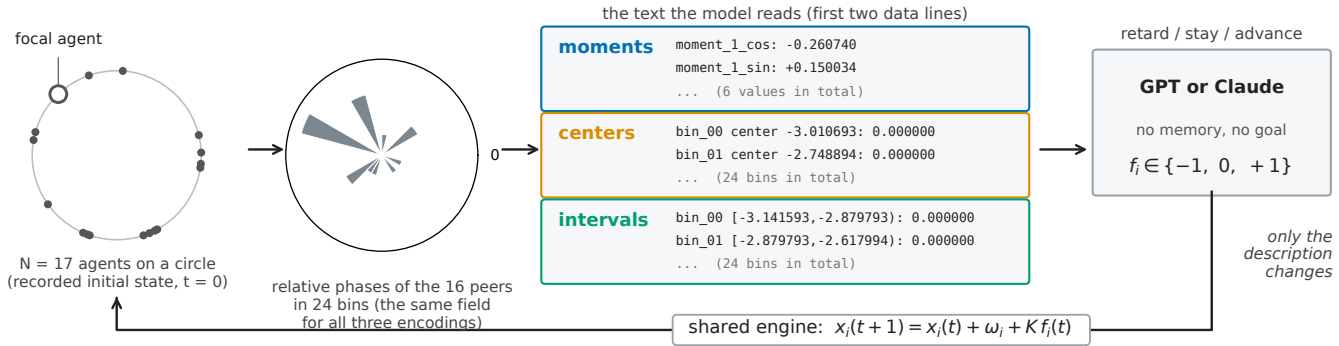


b GPT, K = 0.15, seed 0: phase configurations

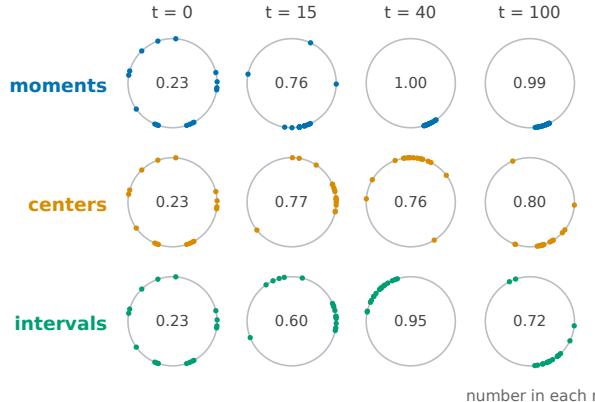


c Claude, K = 0.15, seed 0: phase configurations

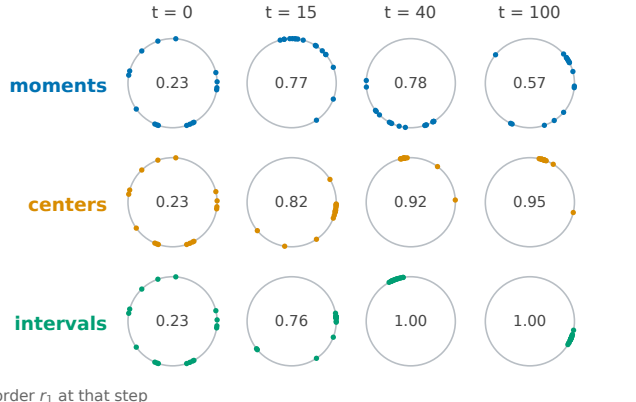


d GPT, K = 0.15: six matched seeds

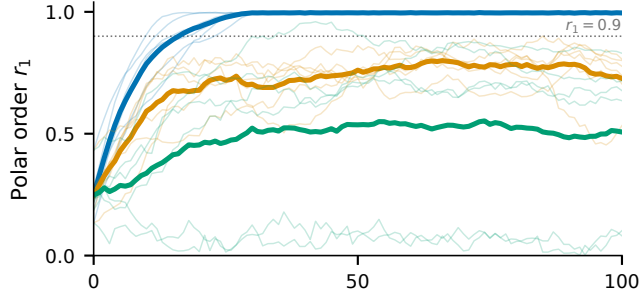


e Claude, K = 0.15: six matched seeds

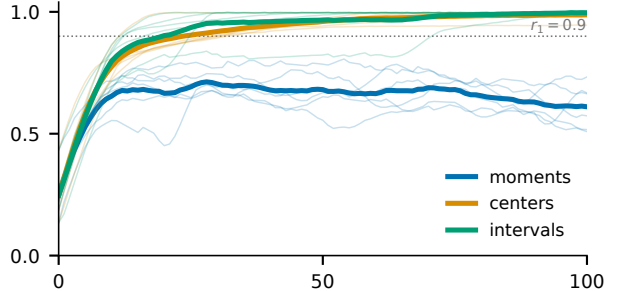

f Final order per seed; counts with $r_1(T) \geq 0.9$

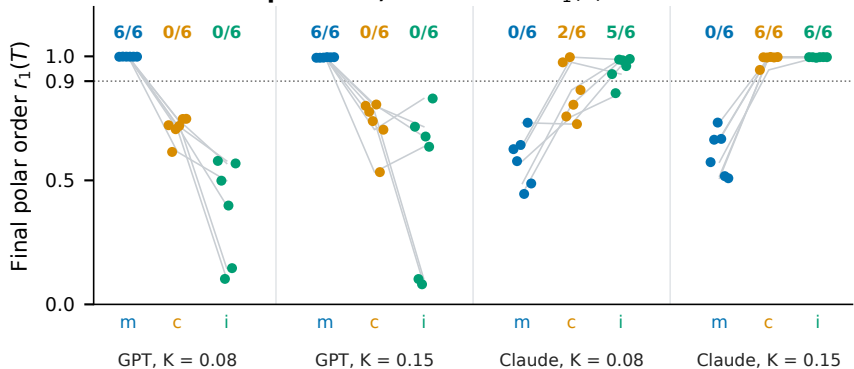

g Two-cluster tendency

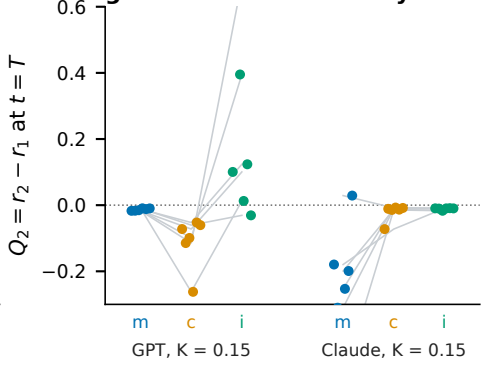

K = 0 control: with the coupling term removed, the three encodings produced identical r_1, r_2, r_3 trajectories from every shared seed in both models (exact equality of the recorded series), although their action distributions still differed.