



A Controlled-field protocol: one peer distribution rotated around the focal agent

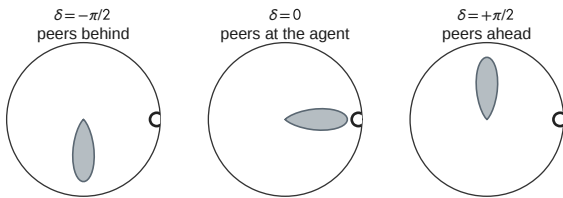


A von Mises peer field (open circle: focal agent) is rotated by δ (36 values) at concentration κ (5 values), written under each encoding, and shown to the model 24 times in each of two acquisition blocks (25,920 responses per model family).

Mean action $g(\delta) = p(+1|\delta) - p(-1|\delta)$ is the interaction rule.
 $g > 0$ with peers ahead and $g < 0$ with peers behind is attraction toward the group; Fourier components $a_1 \sin \delta + b_1 \cos \delta + \dots$ summarize it.


B One field ($\kappa = 12$, $\delta = -0.25$), six rules

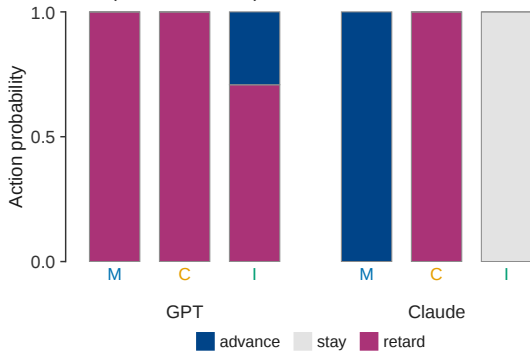

C GPT, $\kappa = 12$

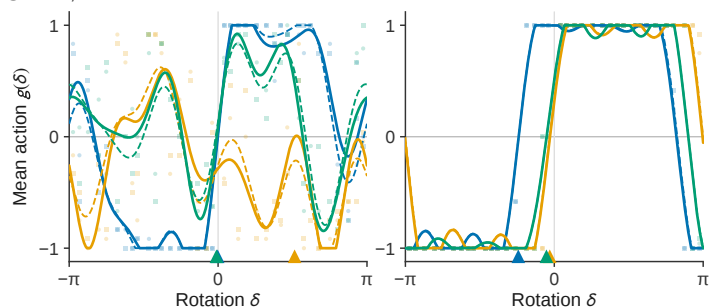


D Claude, $\kappa = 12$




triangles: where the block-1 fit switches from retard to advance nearest $\delta = 0$


E GPT: $a_1 + i b_1$ across κ

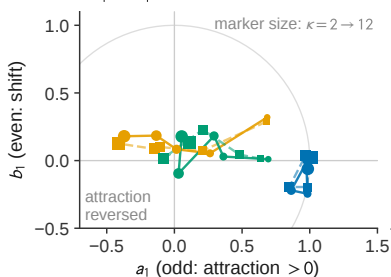


F Claude: $a_1 + i b_1$ across κ

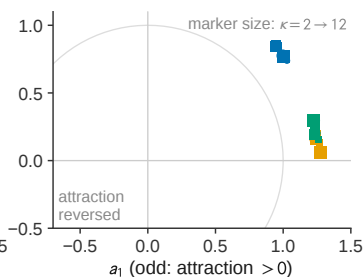


G Second harmonic R_2 across κ

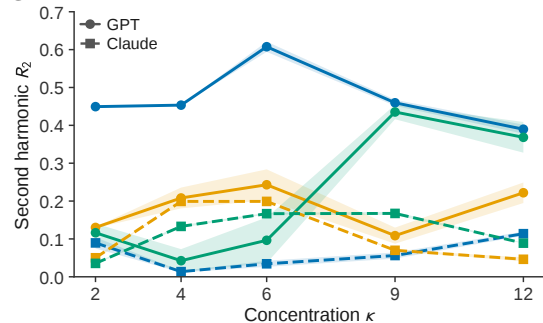


H GPT: activity vs ϵ

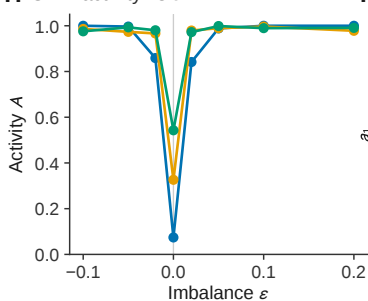

I GPT: attraction vs ϵ

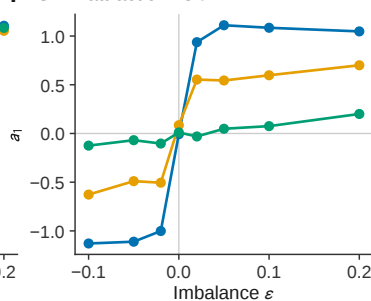

J GPT: d_{TV} , six field families

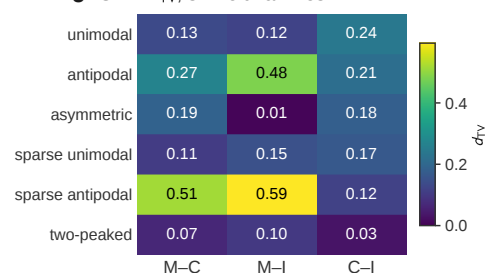

Fitted curves are clipped to $[-1, 1]$ for display; all coefficients come from the original unconstrained order-6 fits. Solid/circles: block 1; dashed/squares: block 2.