




## A One recorded state, three descriptions, one shared engine

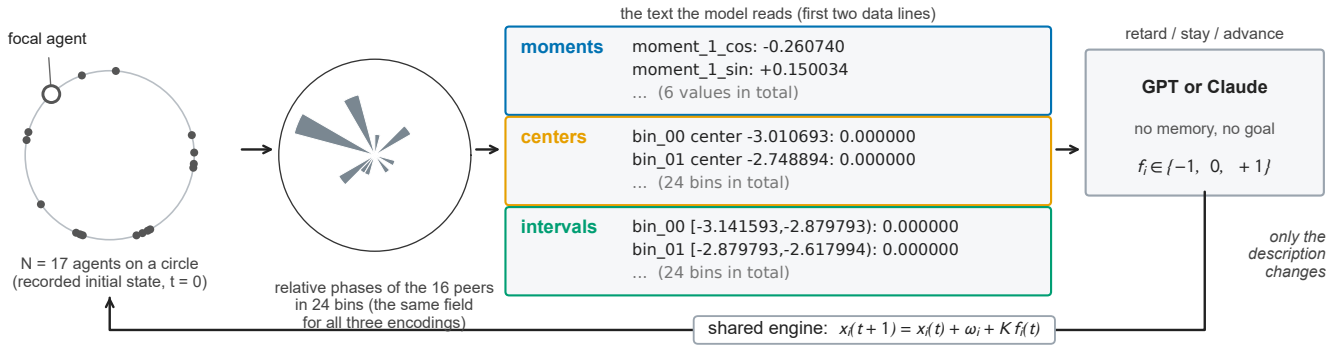


## B GPT, K = 0.15, seed 0: phase configurations

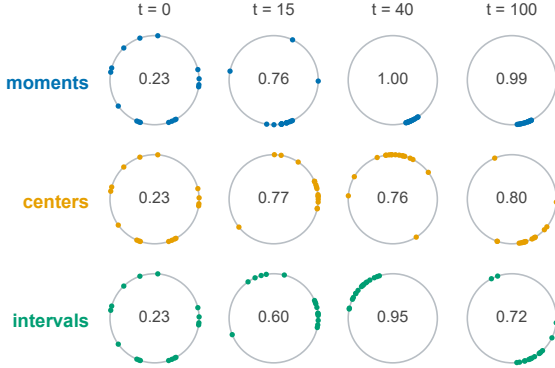


## C Claude, K = 0.15, seed 0: phase configurations

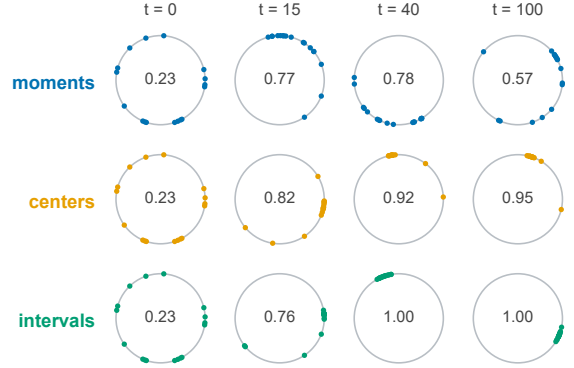


## D GPT, K = 0.15: six matched seeds

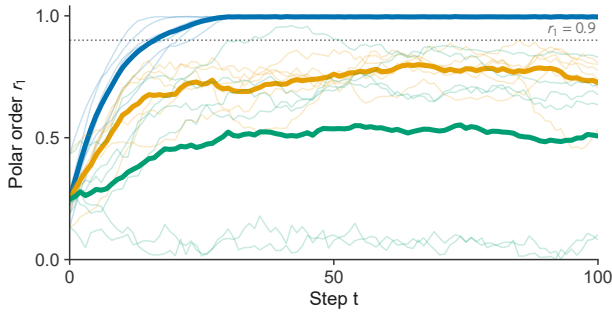


## E Claude, K = 0.15: six matched seeds

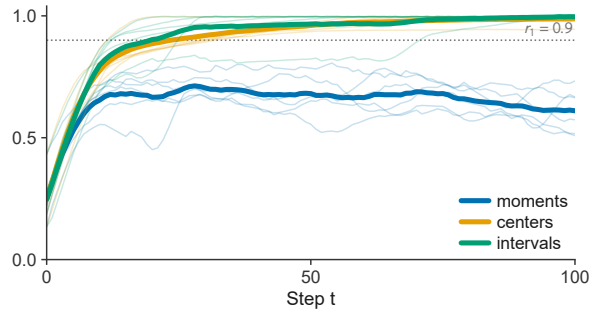

## F Final order per seed; counts with $r_1(T) \geq 0.9$

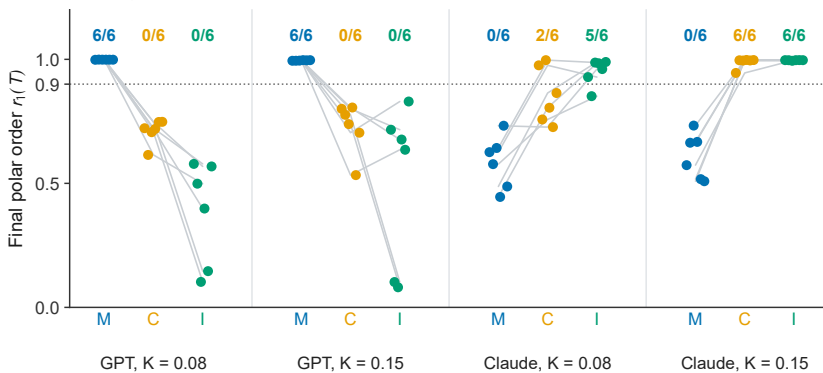

## G Two-cluster tendency

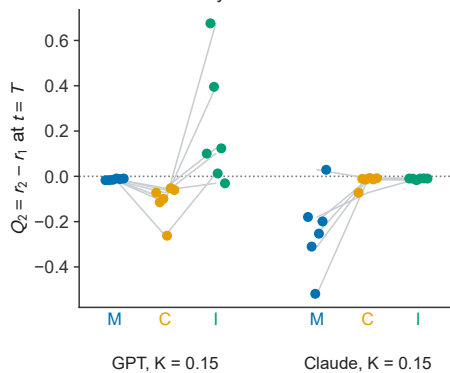

K = 0 control: with the coupling term removed, the three encodings produced identical  $r_1, r_2, r_3$  trajectories from every shared seed in both models (exact equality of the recorded series), although their action distributions still differed.