Sifting the GOTO transient stream with *transient-optimised* Bayesian source classification

Tom Killestein (Warwick) [t.killestein@warwick.ac.uk

How to filter >100k candidate detections a night, night on night, with limited human dataset labels, with maximal recovery of faint supernovae, kilonovae, and other exciting transients that we want to find?

Huge datasets generated with minimal human intervention!

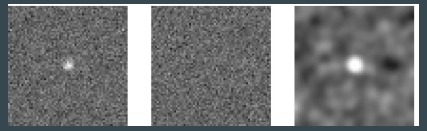

Novel augmentation strategies to make supernovae!

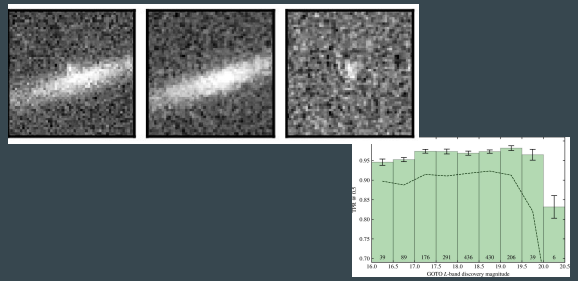

Uncertainty estimates for diagnostics and AL!

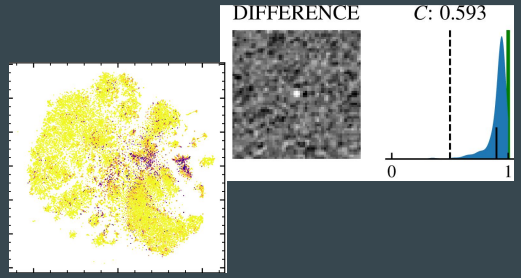

For performance metrics, in-depth information, and next steps on multi-label tasks

ePoster 1470!
arXiv:2102.09892