

1 Agroforestry SmartAgroforst: Poplar biomass modelling

2 Thomas Kirschstein^{1,1,1,*}

3 Abstract

Short-rotation agroforestry systems are increasingly promoted as a low-carbon feedstock option for bio-based value chains, but their economic viability depends on coordinated decisions on stand establishment, multi-cycle harvesting, and product cascading in spatially distributed supply chains. This paper develops a mixed-integer linear programming (MILP) model for the integrated design and operation of an agroforestry biomass supply chain with explicit age-lag constraints that link consecutive harvests at each site. The formulation couples allometric yield functions for different biomass types with a multi-product, multi-period network design model including storage, processing, and product quality cascades. The model is applied to a stylised case study of Central European poplar-based alley-cropping systems to explore trade-offs between harvest rotation length, product portfolios, and infrastructure configuration. We outline a computational experimentation plan to test the impact of allometric parameter uncertainty, price scenarios, and policy incentives on the optimal deployment of agroforestry systems in cleaner bioeconomy pathways.

4 *Keywords:* Agroforestry, Short-rotation coppice, Biomass supply chain, Product
5 cascading

```
6 ## [1] "age"          "scenario"      "Merch. stem"  "Merch. branch"  
7 ## [5] "Residue"  
  
8 ## Building sparse LP (Rcpp v10-no-Y, matching !build_AFS_milp.R)...  
9 ##   n_vars=312907 (z:66265 Xij:177045 S:1221 Xjk:68376)  
10 ##   C1: Path establishment
```

*Corresponding author

Email address: thomas.kirschstein@ikts.fraunhofer.de (Thomas Kirschstein)

Preprint submitted to Journal Name

May 29, 2026

```

11  ## C2: Path connectivity
12  ## C3: Biomass yield
13  ## C4: Inventory balance
14  ## C5: Storage capacity
15  ## C6: Processing capacity
16  ## C7: Demand satisfaction
17  ## Total constraints: 27183, nnz: 977322

18  ## [solve_lp_with_gurobi] 312907 vars | 27183 constrs | 977322 nnz | sense=max | start=none
19  ## Set parameter Username
20  ## Set parameter LicenseID to value 2805714
21  ## Set parameter TimeLimit to value 300
22  ## Set parameter MIPGap to value 0.05
23  ## Set parameter MIPFocus to value 1
24  ## Set parameter Cuts to value 3
25  ## Academic license - for non-commercial use only - expires 2027-04-10
26  ## Gurobi Optimizer version 12.0.1 build v12.0.1rc0 (win64 - Windows 11+.0 (26200.2))
27  ##
28  ## CPU model: AMD Ryzen AI 9 HX 370 w/ Radeon 890M, instruction set [SSE2|AVX|AVX2|AVX512]
29  ## Thread count: 12 physical cores, 24 logical processors, using up to 24 threads
30  ##
31  ## Non-default parameters:
32  ## TimeLimit 300
33  ## MIPGap 0.05
34  ## MIPFocus 1
35  ## Cuts 3
36  ## LogToConsole 0
37  ##
38  ## Optimize a model with 27183 rows, 312907 columns and 977322 nonzeros
39  ## Model fingerprint: 0x2903b5f1
40  ## Variable types: 246642 continuous, 66265 integer (66265 binary)
41  ## Coefficient statistics:

```

```

42  ## Matrix range      [1e+00, 6e+05]
43  ## Objective range   [1e-01, 5e+07]
44  ## Bounds range      [1e+00, 5e+07]
45  ## RHS range         [1e+00, 7e+07]
46  ## Found heuristic solution: objective -0.0000000
47  ## Presolve removed 3513 rows and 47344 columns
48  ## Presolve time: 3.66s
49  ## Presolved: 23670 rows, 265563 columns, 844537 nonzeros
50  ## Variable types: 204919 continuous, 60644 integer (60644 binary)
51  ## Found heuristic solution: objective 1789027.8702
52  ## Deterministic concurrent LP optimizer: primal simplex, dual simplex, and barrier
53  ## Showing barrier log only...
54  ##
55  ## Root barrier log...
56  ##
57  ## Ordering time: 0.56s
58  ##
59  ## Barrier statistics:
60  ## AA' NZ      : 5.969e+05
61  ## Factor NZ   : 7.942e+06 (roughly 200 MB of memory)
62  ## Factor Ops  : 8.060e+09 (less than 1 second per iteration)
63  ## Threads     : 10
64  ##
65  ##              Objective              Residual
66  ## Iter      Primal      Dual      Primal      Dual      Compl      Time
67  ##   0  -1.27238033e+17  2.30657289e+17  2.46e+09  2.33e+06  7.99e+13  5s
68  ##   1  -5.04199417e+16  2.04695645e+17  9.71e+08  5.34e+06  3.23e+13  5s
69  ##   2  -6.81438217e+15  1.58107025e+17  1.26e+08  4.55e+05  4.44e+12  5s
70  ##   3  -1.88672858e+15  8.72316847e+16  3.22e+07  3.35e+04  1.18e+12  6s
71  ##   4  -3.97794604e+14  4.46059668e+16  5.93e+06  1.12e+04  2.59e+11  6s
72  ##   5  -8.49501815e+13  1.88357394e+16  1.15e+06  1.59e+03  6.94e+10  6s

```

73	##	6	-2.68767003e+13	9.79902059e+15	1.88e+05	6.98e+02	2.79e+10	6s
74	##	7	-4.01671381e+12	6.59281020e+15	1.67e+04	4.40e+02	1.33e+10	6s
75	##	8	-1.80913625e+12	3.16542978e+15	7.17e+03	1.52e+02	6.17e+09	6s
76	##	9	-7.25487760e+11	1.00688933e+15	2.48e+03	2.11e+01	1.91e+09	6s
77	##	10	-3.85787441e+11	1.05717787e+14	1.02e+03	6.88e-08	2.08e+08	6s
78	##	11	-3.41807499e+11	7.76593023e+13	8.42e+02	9.73e-08	1.54e+08	7s
79	##	12	-3.12174733e+11	5.32639810e+13	7.21e+02	5.58e-08	1.07e+08	7s
80	##	13	-2.32575974e+11	2.36218750e+13	4.34e+02	6.89e-08	5.03e+07	7s
81	##	14	-1.37689645e+11	4.50041646e+12	1.49e+02	7.45e-08	1.19e+07	7s
82	##	15	-1.10219518e+11	2.41466677e+12	6.99e+01	1.01e-07	6.38e+06	7s
83	##	16	-1.04872786e+11	2.20177064e+12	5.66e+01	1.49e-07	5.68e+06	7s
84	##	17	-8.20518347e+10	1.99548634e+12	4.23e+01	2.14e-07	4.90e+06	7s
85	##	18	-5.69333690e+10	1.21912826e+12	2.75e+01	1.19e-07	3.03e+06	8s
86	##	19	-3.80307534e+10	1.15364221e+12	1.77e+01	1.68e-07	2.62e+06	8s
87	##	20	-2.66490448e+10	4.52218888e+11	1.23e+01	8.01e-08	1.13e+06	8s
88	##	21	-1.32031252e+10	3.17549827e+11	6.06e+00	6.89e-08	7.09e+05	8s
89	##	22	-1.09058418e+10	2.36203225e+11	5.05e+00	8.01e-08	5.23e+05	8s
90	##	23	-7.59270974e+09	1.64975714e+11	3.64e+00	6.52e-08	3.55e+05	8s
91	##	24	-5.57530507e+09	1.19898544e+11	2.80e+00	5.59e-08	2.52e+05	8s
92	##	25	-2.92433908e+09	7.60099060e+10	1.73e+00	4.10e-08	1.53e+05	8s
93	##	26	-1.42927532e+09	3.18124346e+10	1.12e+00	2.61e-08	6.32e+04	9s
94	##	27	-8.26573224e+08	2.27715950e+10	8.98e-01	2.05e-08	4.43e+04	9s
95	##	28	-3.51216792e+08	1.77726999e+10	7.28e-01	1.49e-08	3.38e+04	9s
96	##	29	4.19161754e+08	1.34506875e+10	4.61e-01	9.31e-09	2.40e+04	9s
97	##	30	8.47139246e+08	9.96479607e+09	3.24e-01	1.12e-08	1.67e+04	9s
98	##	31	1.04456073e+09	7.97935798e+09	2.50e-01	9.31e-09	1.27e+04	9s
99	##	32	1.57500376e+09	5.96973266e+09	9.39e-02	5.59e-09	8.01e+03	9s
100	##	33	1.69966300e+09	5.11733794e+09	7.45e-02	7.45e-09	6.23e+03	10s
101	##	34	1.80541556e+09	4.08300426e+09	6.11e-02	5.59e-09	4.15e+03	10s
102	##	35	1.94792749e+09	3.74581284e+09	4.37e-02	4.66e-09	3.27e+03	10s
103	##	36	2.02573440e+09	3.44169122e+09	3.53e-02	4.66e-09	2.58e+03	10s

104	##	37	2.13289912e+09	3.23990877e+09	2.60e-02	4.66e-09	2.01e+03	10s
105	##	38	2.29852752e+09	3.05507689e+09	1.13e-02	5.59e-09	1.38e+03	10s
106	##	39	2.34435278e+09	2.87751063e+09	8.16e-03	4.66e-09	9.71e+02	10s
107	##	40	2.39685087e+09	2.78967023e+09	4.91e-03	4.66e-09	7.15e+02	11s
108	##	41	2.43002273e+09	2.72706746e+09	3.18e-03	3.73e-09	5.41e+02	11s
109	##	42	2.44143411e+09	2.68874987e+09	2.71e-03	3.73e-09	4.50e+02	11s
110	##	43	2.46127511e+09	2.62199767e+09	1.95e-03	3.73e-09	2.93e+02	11s
111	##	44	2.47996227e+09	2.59242469e+09	1.31e-03	3.73e-09	2.05e+02	11s
112	##	45	2.49144551e+09	2.57776214e+09	9.40e-04	3.73e-09	1.57e+02	11s
113	##	46	2.49915231e+09	2.56895493e+09	7.11e-04	4.66e-09	1.27e+02	11s
114	##	47	2.50783351e+09	2.55419595e+09	4.62e-04	3.73e-09	8.44e+01	12s
115	##	48	2.51492977e+09	2.54333803e+09	2.69e-04	2.79e-09	5.17e+01	12s
116	##	49	2.51954656e+09	2.53898070e+09	1.50e-04	3.73e-09	3.54e+01	12s
117	##	50	2.52106929e+09	2.53445249e+09	1.11e-04	2.79e-09	2.44e+01	12s
118	##	51	2.52241955e+09	2.53258097e+09	7.68e-05	3.73e-09	1.85e+01	12s
119	##	52	2.52297697e+09	2.53008212e+09	6.33e-05	6.52e-09	1.29e+01	12s
120	##	53	2.52360802e+09	2.52938349e+09	4.89e-05	5.59e-09	1.05e+01	12s
121	##	54	2.52447787e+09	2.52813409e+09	2.82e-05	9.31e-09	6.66e+00	13s
122	##	55	2.52505777e+09	2.52646722e+09	1.47e-05	3.73e-09	2.57e+00	13s
123	##	56	2.52545835e+09	2.52614036e+09	6.40e-06	2.79e-09	1.24e+00	13s
124	##	57	2.52558967e+09	2.52598969e+09	3.79e-06	5.59e-09	7.29e-01	13s
125	##	58	2.52567903e+09	2.52590647e+09	2.05e-06	8.38e-09	4.14e-01	13s
126	##	59	2.52574052e+09	2.52585516e+09	9.55e-07	3.49e-09	2.09e-01	13s
127	##	60	2.52576636e+09	2.52581369e+09	6.02e-07	3.73e-09	8.62e-02	13s
128	##	61	2.52577980e+09	2.52580177e+09	3.77e-07	9.31e-09	4.00e-02	13s
129	##	62	2.52578500e+09	2.52579399e+09	2.44e-07	3.73e-09	1.64e-02	14s
130	##	63	2.52578709e+09	2.52579207e+09	3.17e-07	4.66e-09	9.07e-03	14s
131	##	64	2.52578906e+09	2.52579109e+09	9.92e-07	4.66e-09	3.70e-03	14s
132	##	65	2.52579012e+09	2.52579068e+09	1.78e-06	4.39e-09	1.02e-03	14s
133	##	66	2.52579052e+09	2.52579057e+09	1.74e-07	3.83e-09	9.37e-05	14s
134	##	67	2.52579056e+09	2.52579056e+09	4.15e-10	4.19e-09	2.88e-07	14s

```

135  ##      68      2.52579056e+09      2.52579056e+09      5.69e-09      4.66e-09      6.03e-12      14s
136  ##
137  ## Barrier solved model in 68 iterations and 14.44 seconds (14.04 work units)
138  ## Optimal objective 2.52579056e+09
139  ##
140  ##
141  ## Root crossover log...
142  ##
143  ##      19877 DPushes remaining with DInf 0.0000000e+00      14s
144  ##      118 DPushes remaining with DInf 0.0000000e+00      15s
145  ##      0 DPushes remaining with DInf 0.0000000e+00      15s
146  ##
147  ##      351 PPushes remaining with PInf 0.0000000e+00      15s
148  ##      0 PPushes remaining with PInf 0.0000000e+00      15s
149  ##
150  ## Push phase complete: Pinf 0.0000000e+00, Dinf 2.9696090e+05      15s
151  ##
152  ##
153  ## Root simplex log...
154  ##
155  ## Iteration      Objective      Primal Inf.      Dual Inf.      Time
156  ##      18588      2.5257906e+09      0.0000000e+00      2.969609e+05      15s
157  ##      18857      2.5257906e+09      0.0000000e+00      0.0000000e+00      16s
158  ## Concurrent spin time: 4.41s (can be avoided by choosing Method=3)
159  ##
160  ## Solved with barrier
161  ##
162  ## Root relaxation: objective 2.525791e+09, 18857 iterations, 16.25 seconds (10.30 work units)
163  ## Total elapsed time = 29.07s (DegenMoves)
164  ## Total elapsed time = 33.24s (DegenMoves)
165  ##

```

166	##	Nodes		Current Node		Objective Bounds		Work
167	##	Expl Unexpl		Obj Depth IntInf		Incumbent BestBd Gap		It/Node Time
168	##							
169	##	0 0		2.5258e+09 0 922		1789027.87 2.5258e+09 -		- 33s
170	## H	0 0				1.739327e+09 2.5258e+09 45.2%		- 35s
171	## H	0 0				1.751460e+09 2.5258e+09 44.2%		- 35s
172	## H	0 0				1.780348e+09 2.5258e+09 41.9%		- 35s
173	## H	0 0				1.833217e+09 2.5258e+09 37.8%		- 36s
174	## H	0 0				1.889184e+09 2.5258e+09 33.7%		- 36s
175	## H	0 0				1.896653e+09 2.5258e+09 33.2%		- 37s
176	## H	0 0				1.907201e+09 2.5258e+09 32.4%		- 37s
177	## H	0 0				1.923624e+09 2.5258e+09 31.3%		- 37s
178	## H	0 0				2.089427e+09 2.5258e+09 20.9%		- 38s
179	## H	0 0				2.093311e+09 2.5258e+09 20.7%		- 38s
180	## H	0 0				2.093782e+09 2.5258e+09 20.6%		- 39s
181	## H	0 0				2.096091e+09 2.5258e+09 20.5%		- 39s
182	## H	0 0				2.096141e+09 2.5258e+09 20.5%		- 39s
183	## H	0 0				2.096510e+09 2.5258e+09 20.5%		- 39s
184	##	0 0		2.5252e+09 0 1066		2.0965e+09 2.5252e+09 20.4%		- 117s
185	## H	0 0				2.363785e+09 2.5252e+09 6.83%		- 151s
186	##	0 0		2.5250e+09 0 1052		2.3638e+09 2.5250e+09 6.82%		- 171s
187	##	0 0		2.5250e+09 0 1051		2.3638e+09 2.5250e+09 6.82%		- 176s
188	##	0 0		2.5250e+09 0 1052		2.3638e+09 2.5250e+09 6.82%		- 178s
189	##	0 0		2.5244e+09 0 1153		2.3638e+09 2.5244e+09 6.79%		- 248s
190	##	0 0		- 0		2.3638e+09 2.5244e+09 6.79%		- 300s
191	##							
192	##	Cutting planes:						
193	##	Gomory: 3						
194	##	MIR: 209						
195	##	Flow cover: 801						
196	##							

```

197 ## Explored 1 nodes (51779 simplex iterations) in 300.04 seconds (399.46 work units)
198 ## Thread count was 24 (of 24 available processors)
199 ##
200 ## Solution count 10: 2.36379e+09 2.36379e+09 2.09651e+09 ... 1.89665e+09
201 ##
202 ## Time limit reached
203 ## Warning: max constraint violation (1.7987e-06) exceeds tolerance
204 ## Warning: max bound violation (2.6978e-06) exceeds tolerance
205 ## Best objective 2.363785191489e+09, best bound 2.524373955466e+09, gap 6.7937%
206 ## [solve_lp_with_gurobi] Status: TIME_LIMIT | ObjVal: 2363785191.4891 | Runtime: 300.6 s

```

207 1. Introduction

208 Agroforestry systems that integrate trees with agricultural crops (silvoarable systems)
209 are increasingly recognised as a promising land-use option to reconcile climate mitigation,
210 biodiversity conservation, and rural income generation on the same hectare of land (Toens-
211 meier, 2017). Temperate agroforestry systems (AFS) based on fast-growing species such
212 as poplar, willow, alder, and black locust can deliver substantial biomass yields while im-
213 proving soil quality and providing multiple ecosystem services compared to conventional
214 monocultures (Huber et al., 2018). Biomasses produced in AFS is considered as a sus-
215 tainable feedstock and can be used either energetically, chemically or materially (e.g. in
216 the building sector). The latter two options are generally preferred over the energetic
217 usage from a cleaner production perspective as biogenic carbon is stored in products
218 during their life span which contributes to climate change mitigation.

219 Despite substantial research on ecological advantages and pioneering initiatives to
220 establish AFS in practice, the share of AFS in agricultural production systems is still
221 small. E.g. in Germany about 1200 hectares of silvoarable AFS are established in 2025,
222 which accounts for about 0.02% of total agricultural land use [DEFAF]. One of the core
223 challenges in establishing AFS systems at large scale in practice is a lack of opportunities
224 to generate substantial revenues from woody biomasses of AFS. On the other side, the
225 rise of bioeconomy creates substantial demands for woody biomass and requires a reliable
226 and cost-efficient feedstock supply. As woody biomasses are bulky feedstocks with low

energy density, the design of cost-efficient supply chains is crucial to ensure the economic viability of AFS-based value chains. This requires coordinated decisions on stand establishment, multi-cycle harvesting, and product cascading in spatially distributed supply chains, which can be supported by integrated optimisation models that link stand-level growth dynamics to regional supply chain design.

In the last two decades, a large body of research has analysed biomass supply chains for bioenergy and biorefineries using mathematical programming models, often in the form of mixed-integer linear programming (MILP) (Zahraee et al., 2020; Sharma et al., 2013). These models typically optimise network configuration, feedstock sourcing, and logistics under cost or profit objectives. They often treat biomass availability as an exogenous input or rely on simplified agricultural production decisions. Moreover, downstream processing of biomasses is concentrated on one particular value chain e.g. bioenergy plants consuming all produced biomasses. Recent work has started to integrate operational details such as various biomass types, biomass growth models and regeneration processes in multi-period supply chain models.

The present paper contributes to this literature in four ways. First, we propose a novel MILP formulation for AFS-based biomass supply chain design that explicitly links establishment decisions and consecutive harvest decisions, ensuring that harvesting decisions at each site are consistent with minimum and maximum rotation ages. Second, we embed allometric yield functions for different biomass types generating age-specific yields for different woody biomass types (like stems, branches, or leaves and twigs). Third, these different woody biomass types can be processed in specific downstream industries, like chemical or paper industry as well as energy sector. The model aims to provide strategic decision support for establishing regional AFS-based bioeconomy ecosystems connecting multiple industries and product markets.

The remainder of the paper is structured as follows. Section 2 reviews the relevant literature on agroforestry biomass systems, allometric biomass modelling, and biomass supply chain optimisation. Section 3 summarises the MILP formulation for the agroforestry supply chain with age-lag constraints. Section ?? outlines the planned computational experiments for the case study and discusses expected insights for cleaner production strategies.

258 2. Literature review

259 Agroforestry biomass systems, stand-level growth models, and biomass supply chain
260 optimisation have each been studied extensively, but they are rarely combined in an inte-
261 grated framework that links age-dependent stand dynamics to regional product-cascading
262 value chains (Zahraee et al., 2020; Sharma et al., 2013; Espinoza et al., 2017). This sec-
263 tion reviews (i) agroforestry systems with emphasis on system types, economics, and the
264 cascading use of biomass as the primary revenue driver; (ii) biomass growth models at
265 tree and stand level with explicit attention to the allometric-diameter-stand-biomass
266 pathway; and (iii) biomass supply chain design using mathematical programming. The
267 section concludes by identifying the modelling gap addressed in this paper.

268 2.1. Agroforestry systems

269 Agroforestry deliberately integrates woody perennials with crops and/or livestock on
270 the same management unit, with the aim of enhancing productivity, profitability, and
271 environmental performance (Nair, 1993; Toensmeier, 2017). In the temperate zone, three
272 distinct system types can be distinguished based on the spatial arrangement of trees and
273 the rotation length at which woody biomass is harvested.

274 **Short-rotation coppice (SRC)** is defined as a monoculture plantation of fast-
275 growing woody species covering the entire management unit, with planting densities
276 of 8,000–20,000 cuttings-ha⁻¹. After each harvest the root system regenerates without
277 replanting. Rotation cycles are typically 3–7-years and total stand lifetime is 20–25-years
278 (Trnka et al., 2008; Faasch and Patenaude, 2012). SRCs are no AFSs in the narrow sense,
279 but it is helpful to benchmark biomass production.

280 **Short-rotation agroforestry systems (SRAFS)** integrate SRC-type tree strips
281 (typically 1–4 rows of the same fast-growing species like poplar or willow) into an otherwise
282 arable field in an alley-cropping arrangement. Crop production continues in the inter-
283 row strips (Huber et al., 2018; Graves et al., 2007). Thus, tree strips typically cover
284 10–30% of the total parcel area. Rotation lengths and total stand lifetime in SRAFS are
285 comparable to SRCs. In SRAFS all trees are effectively edge trees, exposed to higher light
286 and water availability than interior SRC trees. This boundary effect raises individual-tree

287 biomass accumulation but also intensifies competition with adjacent crop rows (Huber
288 et al., 2018).

289 **Long-rotation agroforestry systems (LRAFS)** use the same alley-cropping spa-
290 tial structure as SRAFS but with rotation cycles of 12–15~years or longer (Graves et al.,
291 2007; Nair, 1993). At this rotation length, individual trees develop substantial stem di-
292 ameters and the proportion of high-value timber increases markedly, enabling premium
293 material uses (veneer, sawlogs, engineered wood products) that are inaccessible in short-
294 rotation systems. Therefore, often timber-quality tree species (such as walnut, cherry,
295 oak, or high-grade poplar clones) are planted.

296 SRAFS and LRAFS are not clearly differentiated in practice. First, a clear cut-off age
297 is hard to define and, mor importantly, the intended use of AFS biomass is not always
298 clear and can also change over time. Nonetheless, when establishing AFS, the structure
299 of AFS and its intended use after harvest drives planting decisions and, subsequently,
300 economic viability. Thus, in the present paper SRAFS and LRAFS are not considered as
301 separate AFS systems, but the interplay of intended use, establishment, and harvesting
302 decisions is analysed.

303 *2.1.1. Economic rationale of landowners*

304 The decision of a landowner to establish an AFS involves weighing substantial up-front
305 costs and long-term opportunity costs against a diversified revenue stream. On the **cost**
306 **side**, establishment requires site preparation, planting material, and planting labour,
307 typically amounting to 1,500–3,500 €/ha for SRC or SRAFS (Faasch and Patenaude,
308 2012; Testa et al., 2014). Recurrent harvest and refitting costs (machine hire, chipping,
309 transport to roadside) add approximately 200–400 €/ha per rotation depending on stand
310 density and equipment availability (Testa et al., 2014; Spinelli et al., 2009). During
311 the rotation, maintenance cost of AFS arise on a yearly basis. Next to expenses for
312 establishment, maintenance and harvesting, opportunity cost arise as no revenues from
313 crops are generate on tree strips. In regions with fertile soils and high cereal prices, yearly
314 crop revenues may sum up to 400–600 €/ha (Faasch and Patenaude, 2012; Graves et al.,
315 2007). Thus, opportunity cost are often the dominant cost driver in SRAFS profitability
316 analyses .

317 On the **benefit side**, the primary revenue of AFS is the sale of harvested woody

biomass, whose magnitude depends critically on rotation length, species, and site productivity. For poplar-based SRAFS in Central Europe, typical yields range from 10 to 25 t of dry matter biomass per ha for typical rotation lengths (Huber et al., 2018; Niemczyk and Thomas, 2021). Additionally, positive crop-yield effects in the inter-row strips of SRAFS and LRAFS may result. Tree rows act as windbreaks, reducing soil erosion and evapotranspiration; they provide partial shading that moderates heat stress during drought years; and their root systems may improve water retention in the topsoil (Graves et al., 2007; Grünewald et al., 2007). Empirical measurements in Central European alley-cropping trials indicate that these microclimate effects can increase cereal yields in adjacent strips by 5–15% relative to open-field controls, partially or fully compensating the loss of arable area occupied by the tree strips (Graves et al., 2007). Beyond direct yield effects, AFS deliver broader ecosystem services (like soil organic matter accumulation, carbon sequestration, biodiversity enhancement) that may lead to agri-environment subsidies and carbon credits (Toensmeier, 2017; Faasch and Patenaude, 2012).

Nonetheless, economic attractiveness of AFS depends primarily on revenues of AFS biomass. Thereby, revenues are different for the types of biomass and in which value chain it is used. Often AFS biomasses are used energetically, i.e. for heat and power generation, or anaerobic digestion, which typically creates low prices per tonne of biomass. Alternatively, woody parts of the biomass (i.e., the stem and large branches) can also be used as pulp and paper grade material as well as feedstock for chemical industry or as timber achieving higher prices (Lamers et al., 2011; De Meyer et al., 2014). Thus, fostering AFS establishment by maximizing economic returns from AFS biomass requires a strategic approach to product cascading that allocates different biomass fractions to the highest-value applications, while ensuring that the rotation length is aligned with the growth dynamics of the stand and the market demand for different biomass types (Lamers et al., 2011).

Thus, for making educated decisions on AFS establishment and harvesting, the expected biomass quantities at harvest for stem, branches, and residues need to be estimated. Thereby, the shares of the biomass types change with stand age. E.g. the share of stem weight rises from roughly 55% at age 4 to over 75% at age 10 (Huber et al., 2018;

Testa et al., 2014). Therefore, in Section 2.2 growth modelling approaches are reviewed that capture the age-dependent growth dynamics of different biomass types in AFS.

2.2. Biomass growth models

Table 1: Notation for the biomass growth and harvest yield models.

Symbol	Description
$M^{sl}(t)$	Total above- and belowground dry biomass per ha of AFS (t DM ha ⁻¹) at stand age t
$A(N)$	Stand-level Gompertz asymptote (t DM ha ⁻¹); density- and site-dependent
k	Gompertz growth-rate coefficient (yr ⁻¹)
t_0	Inflection age of stand biomass accumulation (yr)
N	Stand density (trees ha ⁻¹)
C_{site}	Site-quality constant (kg ha ^{β-1}); conservative: 4475, good site: 6471
β	Competition-density exponent; fitted $\hat{\beta} = 0.380$
ϕ_{ag}	Aboveground fraction of total stand biomass; $\phi_{\text{ag}} = 0.89$
$M^{ag}(t)$	Aboveground dry biomass per ha (t DM ha ⁻¹) at age t
$f_p(t)$	asymptotic fraction of AGB attributed to compartment $p \in \{s, b, r\}$ at age t
α_p, δ_p	Intercept and slope of the linear fraction model for compartment p
$q_p(t)$	Merchantable fraction of compartment p biomass at age t (logistic)
r_p	Logistic growth rate for merchantability of compartment p
$t_{50,p}$	Age at which 50% of compartment p biomass is merchantable (yr)
$Y_p(t)$	Merchantable dry biomass of compartment p per ha at harvest age t (t DM ha ⁻¹)
ω	Moisture content at felling (mass fraction); $\omega = 0.55$

Reliable estimation of stand-level biomass quantities and their age-dependent composition is a necessary prerequisite for any strategic analysis of AFS-based supply chains. Individual-tree biomass is commonly approximated by species-specific allometric power laws relating shoot dry matter to stem base diameter, and these relationships have been calibrated for Central European poplar clones under SRC and SRAFS conditions (Huber et al., 2016, 2018). For supply chain planning, however, the relevant quantity is **stand-level biomass per hectare** over a multi-decade rotation horizon, which requires a temporal growth model that captures the characteristic sigmoidal accumulation trajectory of woody biomass.

361 2.2.1. Stand-level growth model

362 Stand-level aboveground and belowground dry biomass per hectare, $M^{sl}(t)$, accumu-
 363 lates in a right-skewed sigmoidal pattern with a relatively early inflection point, driven
 364 by rapid juvenile shoot growth followed by self-thinning and competitive deceleration
 365 as canopy closure intensifies (Niemczyk and Thomas, 2021; Testa et al., 2014). This
 366 trajectory is described by a Gompertz model:

$$M^{sl}(t) = A(N) \cdot \exp(-\exp(-k(t - t_0))), \quad (1)$$

367 where t_0 is the age of maximum instantaneous biomass increment and k determines how
 368 quickly the stand approaches its site-specific asymptote $A(N)$. For Central European
 369 poplar under medium-rotation AFS management (10–20 yr), calibration against empiri-
 370 cal data from Huber et al. (2018), Niemczyk and Thomas (2021), and Jha (2018) yields
 371 $k = 0.194, \text{yr}^{-1}$ and $t_0 = 9.7, \text{yr}$ for a conservative site, and $k = 0.173, \text{yr}^{-1}$, $t_0 = 10.1, \text{yr}$
 372 for a high-productivity site, placing the growth peak close to the biologically optimal
 373 rotation age identified by Niemczyk and Thomas (2021).

374 The asymptote $A(N)$ is not a fixed species constant but depends explicitly on planting
 375 density through a competition-density power law (?):

$$A(N) = \frac{C_{\text{site}} \cdot N^{1-\beta}}{1000}, \quad (2)$$

376 where C_{site} encodes site quality and β is the competition exponent. Equivalently, the
 377 per-tree asymptote $A_{\text{tree}}(N) = A(N) \cdot 1000/N = C_{\text{site}} \cdot N^{-\beta}$ decreases with density as
 378 individual trees have access to less growing space. Fitting (2) to two anchor points —
 379 a conservative AFS calibration at 113 trees, ha^{-1} (central EU; $A = 84, \text{t, DM, ha}^{-1}$) and
 380 SRC data at 1,333 trees, ha^{-1} from Niemczyk and Thomas (2021) — yields $\hat{\beta} = 0.380$,
 381 consistent with the 0.3–0.5 range reported for managed hardwood plantations (?). Two
 382 site-quality scenarios are used throughout: a **conservative scenario** ($C_{\text{site}} = 4\,475$, 113
 383 trees, ha^{-1} , $A = 84, \text{t, DM, ha}^{-1}$) representative of sandy loam soils in northern Central
 384 Europe, and a **good-site scenario** ($C_{\text{site}} = 6\,471$, 139 trees, ha^{-1} , $A = 138, \text{t, DM, ha}^{-1}$)
 385 representative of deep loamy soils in river valleys.

386 Within each compartment, only the biomass fraction whose element diameter exceeds
 387 a minimum threshold qualifies as merchantable product for industrial use. This fraction

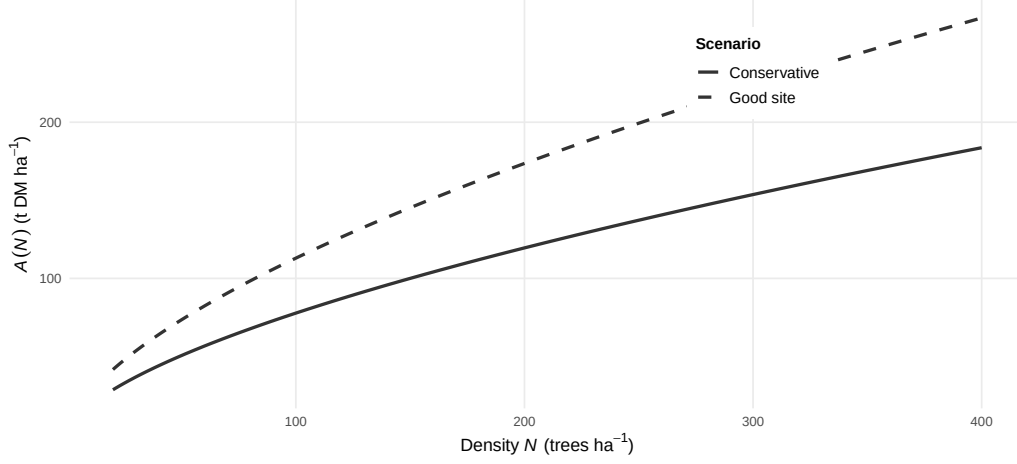


Figure 1: Stand-level Gompertz asymptote function $A(N)$ of planting density for the conservative (solid) and good-site (dashed) scenarios.

388 rises continuously with stand age as stems thicken and branches coarsen, and is modelled
389 by a logistic function:

$$q_p(t) = \frac{f_p}{1 + \exp(-r_p(t - t_{50,p}))}, \quad (3)$$

390 where $t_{50,p}$ is the age at which 50% of compartment p biomass surpasses the diameter
391 threshold. f_p denotes the asymptotic share of component p for mature trees. For the
392 merchantable stem (threshold $d > 15, \text{cm}$), calibration to data from Civitarese et al. (2019)
393 and Niemczyk and Thomas (2021) yields $r_{stem} = 0.467, \text{yr}^{-1}$, $t_{50,stem} = 8.19, \text{yr}$, and
394 $f_{stem} = 0.75$. For merchantable branches (threshold $d > 7, \text{cm}$ at insertion), Civitarese
395 et al. (2019) and Jha (2018) imply $r_{bran} = 0.698, \text{yr}^{-1}$, $t_{50,bran} = 7.55, \text{yr}$, and $f_{bran} =$
396 0.15 .

397 Combining equations (1)–(3), the merchantable dry biomass yield of compartment p
398 per hectare at harvest age t is:

$$Y_p(t) = q_p(t) \cdot M^{ag}(t), \quad (4)$$

399 with all non-merchantable fractions aggregated into the residue stream. Fresh-weight
400 yields at felling are obtained from dry matter yields via $Y_p^{fw} = Y_p/(1 - \omega)$, where the
401 moisture content at felling $\omega = 0.55$ is taken from Civitarese et al. (2019). Figure 2
402 illustrates the shapes of $A(N)$, $f_p(t)$, and $q_p(t)$; Figure 3 shows the resulting stacked

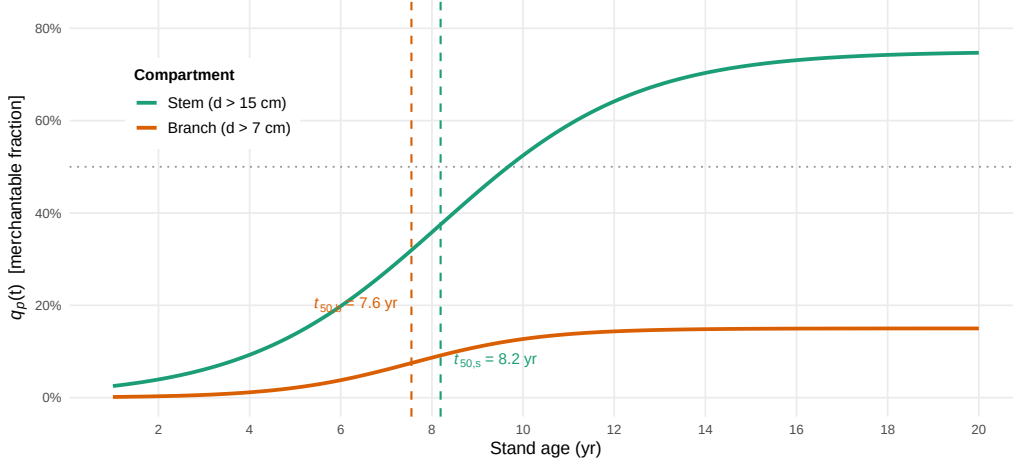


Figure 2: Logistic diameter-class merchantability functions $q_p(t)$ for stem ($d > 15$ cm, green) and branches ($d > 7$ cm, orange); the 50% threshold ages t_{50} are indicated by dashed vertical lines.

403 AGB component trajectories compared with empirical observations.

404 2.3. Biomass supply chain design

405 Biomass supply chain design problems have been extensively studied in literature
 406 (Zahraee et al., 2020; Sharma et al., 2013; Espinoza et al., 2017). Most models jointly
 407 optimise facility locations and capacities, biomass sourcing patterns, multimodal trans-
 408 port flows, and inventory policies under cost or profit objectives, sometimes augmented
 409 by greenhouse gas emission indicators (Ekşioğlu et al., 2009; Arabi et al., 2019). A key
 410 methodological feature of the more advanced formulations is the integration of long-term
 411 network design with multi-period logistics, enabling simultaneous optimisation of infras-
 412 tructure and operational decisions across seasonal or annual time steps (Ekşioğlu et al.,
 413 2009; Zahraee et al., 2020).

414 Among generic multi-product frameworks, OPTIMASS explicitly models product
 415 quality cascades by defining a hierarchy of biomass classes and allowing higher-quality
 416 products to satisfy lower-quality demands, while the t-OPTIMASS extension incorpo-
 417 rates biomass growth and regeneration over multiple periods (De Meyer et al., 2014,
 418 2016). However, in virtually all existing formulations biomass availability is treated as
 419 an exogenous time-series input: stand age structure, rotation decisions, and coppice cy-
 420 cles are not represented endogenously, so that trade-offs between rotation length, stand

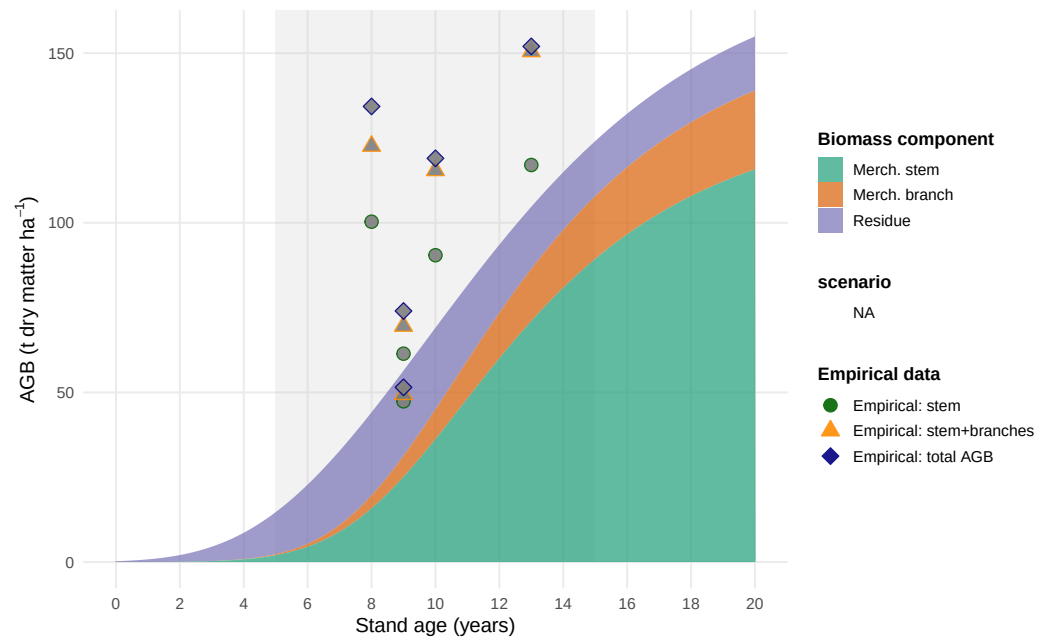


Figure 3: Stand-level aboveground biomass components for poplar under AFS management with $N = 250$ trees ha^{-1} . Empirical AGB observations compiled from Jha (2018), Civitarese et al. (2019), and Niemczyk and Thomas (2021). Grey band: typical medium-rotation harvest window (5–15 years).

management, and supply chain configuration cannot be explored in a unified model (De Meyer et al., 2016; Lamers et al., 2011). This gap is particularly pronounced for agroforestry systems with repeated coppice cycles, where establishment timing, consecutive harvest decisions, and age-dependent biomass quality jointly determine both the feasible supply profile and the achievable product cascade.

The MILP formulation developed in this paper addresses this gap by endogenising stand age dynamics through binary age-lag variables, coupling the component-specific yield coefficients η_{pa} derived from the Gompertz growth models above with supply chain flow variables, and embedding a product quality cascade that allocates stem, branch, and residue fractions to chemical, pulp, and energy markets within a single optimisation model.

2.4. Biomass supply chain design

The design and planning of biomass supply chains has attracted substantial research attention over the past two decades, driven by the need to ensure cost-efficient and sustainable feedstock provision for bioenergy and biorefinery applications. Several systematic reviews provide comprehensive overviews of this literature. Cambero and Sowlati (2014) survey economic, social, and environmental assessment and optimisation studies for forest biomass supply chains, identifying MILP as the dominant modelling approach and noting a growing trend towards multi-objective formulations integrating life cycle assessment.

Yue et al. (2014) review biomass-to-bioenergy and biofuel supply chain models with a focus on multi-scale modelling, uncertainty treatment, and sustainability metrics, and conclude that the coupling of upstream feedstock dynamics with downstream network design remains an underexplored area. Malladi and Sowlati (2018) survey logistics-specific features of biomass supply chain models—seasonal availability, moisture content degradation, preprocessing steps—and highlight that most models treat biomass as a homogeneous commodity, neglecting quality differentiation. Zahraee et al. (2020) provide a recent meta-review of 140+ studies, confirming that cost minimisation is still the dominant objective, and that multi-product cascading formulations are rare.

The structure of biomass supply chain models typically encompasses three decision layers: (i) strategic network design (facility location, capacity sizing, technology selec-

tion), (ii) tactical planning (harvest scheduling, seasonal flows, inventory), and (iii) operational routing. The following paragraphs discuss key individual contributions and their specific methodological advances.

Ekşioğlu et al. (2009) develop one of the earliest large-scale MILP models for biomass-to-biorefinery supply chain design, integrating facility location, capacity sizing, and multimodal transport for lignocellulosic feedstocks. Their model minimises total system cost and introduces binary facility-opening variables that have since become standard in the field. A key limitation, however, is that biomass supply is treated as an exogenous input, so feedstock availability is not endogenised as a function of land-use or growth decisions. Mansoornejad et al. (2013) extend the strategic design perspective to forest biorefineries by integrating product portfolio design with supply chain configuration in a single MILP. Their model explicitly accounts for product conversion efficiencies along different processing pathways, enabling joint optimisation of process technology selection and logistics.

De Meyer et al. (2014) introduce the OPTIMASS framework, a generic MILP for biomass-based supply chain optimisation that explicitly models product quality cascades: higher-quality biomass classes can substitute for lower-quality demands downstream, whereas the reverse is infeasible. This cascade hierarchy, formalised through ordered product sets, is particularly relevant for woody biomass where stem, branch, and residue fractions command different market prices. The companion t-OPTIMASS extension (De Meyer et al., 2016) incorporates temporal dynamics by explicitly representing biomass growth and regeneration over multiple periods, enabling simultaneous optimisation of harvest timing and network flows. However, in both OPTIMASS formulations the growth dynamics are represented as exogenous time-series rather than as age-structured stand models, so rotation-length decisions and age-dependent biomass quality are not endogenised. Arabi et al. (2019) demonstrate multi-period MILP extensions for bio-based supply chains with production dynamics, but focus on microalgae rather than woody biomass and do not address product quality cascades.

Sharma et al. (2013) identify supply-side uncertainty (yield variability, seasonal availability, moisture content) as the most critical source of risk in biomass supply chains. In response, a strand of literature has developed stochastic and robust optimisation ex-

tensions. Zahraee et al. (2020) document that two-stage stochastic MILP and robust optimisation approaches now account for roughly 30% of the modelling literature, with biomass yield uncertainty and price volatility as the dominant stochastic parameters.

Biomass supply chain research focusing specifically on agroforestry or SRC contexts is comparatively sparse. Espinoza et al. (2017) note that most supply chain models assume continuous feedstock availability and do not represent the periodic harvest cycles characteristic of coppice systems. Lamers et al. (2011) analyse feedstock design principles for lignocellulosic supply chains and argue that the allocation of different biomass fractions to valorisation pathways—product cascading—is a key lever for economic viability, yet is rarely optimised jointly with network design decisions. The model developed in Section~3 of this paper directly addresses this gap by endogenising stand age dynamics through binary age-lag variables and coupling component-specific yield coefficients with a product quality cascade.

Table~2 summarises the key modelling features of the reviewed contributions.

Table 2: Key modelling features of selected biomass supply chain design studies.

Study	Objective	Multi-product	Quality cascade	Age dynamics	Uncertainty	Level
Eksioglu et al. (2009)	Cost min.	—	—	—	—	Strategic
Sharma & Taaffe (2013)	Cost min.	Partial	—	—	—	Strategic/Tactical
Mansoornejad et al. (2013)	Profit max.	✓	—	—	—	Strategic
Cambero & Sowlati (2014)	Cost/GHG/jobs	—	—	—	Stochastic	Strategic
Yue et al. (2014)	Cost/GHG	✓	—	—	—	Multi-scale
De Meyer et al. (2015)	Cost min.	✓	✓	Exogenous	—	Strategic/Tactical
De Meyer et al. (2016)	Cost min.	✓	✓	Exogenous TS	—	Multi-period
Lamers et al. (2015)	Cost/quality	✓	Partial	—	Scenario	Strategic
Espinoza et al. (2017)	Sustainability	✓	—	—	Scenario	Strategic
Malladi & Sowlati (2018)	Cost min.	Partial	—	—	—	Tactical/Oper.
Arabi et al. (2019)	Profit max.	✓	—	Exogenous	—	Multi-period
Zahraee et al. (2020)	Multi-obj.	✓	—	—	Stochastic	Strategic/Tactical
This paper	NPV max.	✓	✓	Endogenous	Scenario	Strategic/Multi-period

497 3. MILP Model for Agroforestry Supply Chain Design

498 Building on the biomass growth models introduced in Section 2.2 and the supply
 499 chain design literature reviewed in Section 2.3, this section describes the AFS supply
 500 chain design problem (AFS-SCD), a mixed-integer linear programming (MILP) model
 501 for the integrated design and operation of an agroforestry biomass supply chain. The
 502 model endogenises stand age dynamics through binary age-lag variables, couples the
 503 component-specific yield coefficients η_{pa} derived from the Gompertz growth models (??)–
 504 (??) with supply chain flow variables, and assigns AFS biomass types (i.e., stem, branch,
 505 and residue fractions) to potential consumers in chemical, pulp and paper as well as
 506 energy industry.

507 3.1. Sets, Indices, and Time Structure

508 The model considers a set of agroforestry sites $\mathcal{I}$, storage/pre-treatment facilities $\mathcal{J}$,
 509 consumer sites $\mathcal{K}$, and biomass types $\mathcal{P} = \{\text{stem}, \text{branches}, \text{residues}\}$, whose growth
 510 models are outlined above in (??)–(??). Time is discretised into annual periods $t \in \mathcal{T} =$
 511 $\{1, \dots, T_{\max}\}$. To model flexible harvest timing according to typical rotation structures of
 512 SRAFS and LRAFS, $A^{\min}$ and $A^{\max}$ define minimum and maximum stand ages. Thus,
 513 harvest are possible in periods $\mathcal{T}^{\text{harv}} = \{A^{\min} + 1, \dots, T_{\max}\}$. To consistently model
 514 establishment and consecutive harvest decisions, the following arc sets are defined: $\mathcal{S}^{\text{est}}$
 515 defines potential establishments of AFS. If an AFS is established in period $t \in \mathcal{T}$, arc
 516 $(0, t)$ is selected. Harvest set $\mathcal{S}^{\text{harv}}$ summarizes all potential consecutive harvest periods
 517 within the age-lag bounds $A^{\min}$ and $A^{\max}$. I.e., if an AFS is established or harvested
 518 in period s and next harvest is in period t , arc (s, t) is selected. Finally, there is no
 519 subsequent harvest after period t , the AFS is terminated by selecting arc $(t, T_{\max} + 1)$.
 520 Termination arcs are summarized in set $\mathcal{S}^{\text{term}}$. All arc sets are formally defined as follows:

$$\begin{aligned}\mathcal{S}^{\text{est}} &= \{(0, t) \mid t \in \{1, \dots, T_{\max} - A^{\min}\}\}, \\ \mathcal{S}^{\text{harv}} &= \{(s, t) \mid s, t \in \mathcal{T} \wedge t - s \in \{A^{\min}, \dots, A^{\max}\}\}, \\ \mathcal{S}^{\text{term}} &= \{(s, T_{\max} + 1) \mid s \in \{A^{\min} + 1, \dots, T_{\max}\}\}, \\ \mathcal{S} &= \mathcal{S}^{\text{est}} \cup \mathcal{S}^{\text{harv}} \cup \mathcal{S}^{\text{term}}.\end{aligned}$$

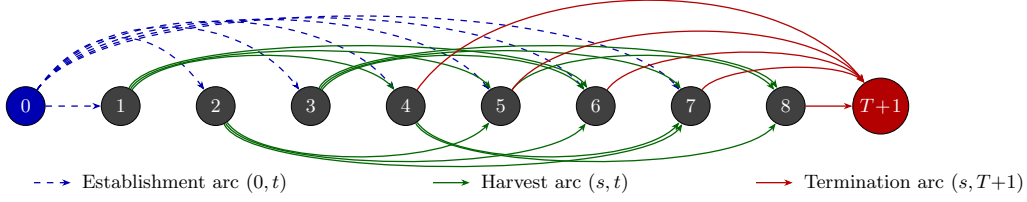


Figure 4: Network structure of set $\mathcal{S}$ for $T = 8$, $A_{\min} = 3$, $A_{\max} = 5$. Dashed blue arcs: establishment arcs $(0, t)$, $t \in \{1, \dots, T-1\}$. Solid green arcs above: harvest arcs (s, t) with odd s ; below: harvest arcs with even s . Solid red arcs: termination arcs $(s, T+1)$, $s \in \{A_{\min} + 1, \dots, T\}$.




Figure 5: Example of a feasible path through the network for $T = 8$, $A_{\min} = 3$, $A_{\max} = 5$: establishment in period 1, harvests in periods 5 and 8, termination at $T + 1$.

Figure 4 illustrates this network structure of all arc sets for $T = 8$, $A^{\min} = 3$, $A^{\max} = 5$.

3.2. Decision Variables

Binary variables z_{ist} indicate whether an arc from set $(s, t) \in \mathcal{S}$ is selected for site i , indicating establishment, (consecutive) harvest, or termination. Taken together across all arcs, these variables trace a path of consecutive harvest cycles at each site over the planning horizon. Figure 5 illustrates a feasible path corresponding to the establishment of an AFS in period 1 and harvests in periods 5 and 8, whereby the harvest in $t = 8$ is final (and AFS is terminated, thus).

When a AFS is harvested in period t , continuous variables $Y_{ipt} \geq 0$ represent the harvest quantity (t) of product p at site i . Flow variables X_{ijpt} and $X_{jkpp't}$ represent transport of products from AFS sites to storage/pre-treatment facilities and from there to consumers, respectively, while S_{jpt} captures end-of-period inventory at facility j .

Table 3 summarises all sets, decision variables, and parameters used in the MILP formulation. Symbols shared with the growth model of Section 2.2 — in particular the yield coefficients η_{pa} , which are derived from the component-specific Gompertz functions (??)–(??) and the stand biomass model (??) — are listed in Table ?? in Section 2.2.

538 3.3. Objective Function

539 As discussed in Section 2.1, the economic attractiveness of AFS supply chains must be
 540 assessed from a global perspective taking into account all processes, activities, and partic-
 541 ipants involved in finally serving customer markets with bio-based feedstocks. Therefore,
 542 revenues for the different biomass fractions and must be weighed against costs occurring
 543 at all value-adding stages of the supply chains. To be precise, revenues created by selling
 544 AFS-based feedstocks to different industrial consumers are counterweighted by establish-
 545 ment, opportunity, harvest, transport, and storage costs of landowners, agricultural firms
 546 as well as biomass logistics companies. The model therefore maximises total contribution
 547 margin of all participants in the AFS supply chain over the planning horizon as follows:

$$\begin{aligned}
 \max Z = & \sum_{k \in \mathcal{K}, p \in \mathcal{P}} R_{kp} \cdot \sum_{j \in \mathcal{J}, (p', p) \in \mathcal{Q}, t \in \mathcal{T}} X_{jkp't} \\
 & - \sum_{i \in \mathcal{I}} c_i^{est} \cdot \text{AREA}_i \cdot \sum_{(0, t) \in \mathcal{S}^{est}} z_{i0t} \\
 & - \sum_{i \in \mathcal{I}} c_i^{opp} \cdot \text{AREA}_i \cdot \left(\sum_{(s, T+1) \in \mathcal{S}^{term}} (s+1) \cdot z_{is(T+1)} - \sum_{(0, t) \in \mathcal{S}^{est}} t \cdot z_{i0t} \right) \\
 & - \sum_{i \in \mathcal{I}} c_i^{main} \cdot (t-s) \cdot \text{AREA}_i \cdot \sum_{(s, t) \in \mathcal{S}^{harv}} z_{ist} \\
 & - \sum_{i \in \mathcal{I}} c_i^{harv} \cdot \text{AREA}_i \cdot \sum_{(s, t) \in \mathcal{S}^{harv}} z_{ist} \\
 & - \sum_{i \in \mathcal{I}, j \in \mathcal{J}, p \in \mathcal{P}, t \in \mathcal{T}} c_p^{\text{tr-raw}} \cdot d_{ij} \cdot X_{ijpt} \\
 & - \sum_{j \in \mathcal{J}, k \in \mathcal{K}, (p, p') \in \mathcal{Q}, t \in \mathcal{T}} c_{p'}^{\text{tr-pre}} \cdot d_{jk} \cdot X_{jkpp't} \\
 & - \sum_{j \in \mathcal{J}, p \in \mathcal{P}, t \in \mathcal{T}} c_j^{stor} \cdot S_{jpt}
 \end{aligned} \tag{5}$$

548 Here, R_{kp} are product- and consumer-specific revenues (€/t). The opportunity cost
 549 term penalises dereduced crop revenues in each year an AFS is established. Transport
 550 cost terms mirror the two-stage flow structure of the AFS supply chain with differenti-
 551 ated rates for raw and pre-treated biomass depending on the biomass type. Cost rates
 552 differ because as e.g. the density and water content of the shipped biomasses differ or
 553 because specialized equipment (e.g. for log transports) is used [REFERENCES]. More-
 554 over, site-specific establishment cost for planting the AFS trees is considered, next to

yearly maintenance costs and harvesting cost. All these costs scale with the size of a site ($AREA_i$) measured in hectar. Maintenance cost comprise e.g. costs for trimming, replanting, and pruning unnecessary shoots. Storage costs are considered if biomasses are stored for more than a year to compensate direct costs (e.g. for storage site maintenance) but primarily opportunity cost due to potential material losses and capital commitment. The usual case is that AFS are harvested at the beginning of a year. Harvested biomass dry during spring and summer such that the biomasses can be used in autumn or winter the same year. As drying is necessary for most industrial applications and beneficial for transport economics, drying storage in the year of harvest is not associated with additional cost.

3.4. Constraints

Constraints (6) limit each site to at most one establishment decision over the planning horizon. Constraints (7) enforce flow conservation in each period. If an activity in period $t \in \mathcal{T}$ takes place, there needs to be a preceeding activity (harvest or establishment) and a succeeding activity (harvest or termination). This way, (7) guarantee valid (possibly empty) activity paths over the complete time horizon for each site. Constraints (8) links the binary harvest-cycle variables to physical yield quantities via the age-dependent yield coefficients $\eta_{p(t-s)}$. These coefficients are pre-computed by evaluating the component-specific Gompertz functions (??) and (??) at stand age $a = t - s$ and scaled by site area $AREA_i$. Thus, implicitly we assume constant yields per hectar for each site i . Note that this simplification can be dropped and site-specific yields $\eta_{ip(t-s)}$ could be introduced without increasing numerical complexity of the AFS-SCD. Constraints (??)–(9) link harvest quantities to transport flows and ensure inventory balance at each facility, following the multi-period network-flow structure of OPTIMASS (De Meyer et al., 2014, 2016). Thereby, harvest quantities can be smaller than available AFS biomasses allowing partial harvesting. Constraints (10)–(11) enforce storage and processing capacity limits at each facility j . Constraints (12) implement product usage at multiple consumption sites k . Thereby, $(p', p) \in \mathcal{Q}$ defines a product mapping allowing high-quality product p' (e.g. stems) satisfying demand of a lower-quality products p up to maximum demand $D_{kpt}^{\max}$. This way, the cascading principle is operationalized as a central economic rationale.

$$\sum_{(0,t) \in \mathcal{S}^{est}} z_{i0t} \leq 1 \quad \forall i \in \mathcal{I} \quad (6)$$

$$\sum_{(s,t) \in \mathcal{S}} z_{ist} = \sum_{(t,u) \in \mathcal{S}} z_{itu} \quad \forall i \in \mathcal{I}, t \in \mathcal{T} \quad (7)$$

$$\sum_{j \in \mathcal{J}} X_{ijpt} \leq \sum_{(s,t) \in \mathcal{S}^{harv}} \eta_{p(t-s)} \cdot \text{AREA}_i \cdot z_{ist} \quad \forall i \in \mathcal{I}, p \in \mathcal{P}, t \in \mathcal{T}^{harv} \quad (8)$$

$$S_{jpt} = S_{jp,t-1} + \sum_{i \in \mathcal{I}} X_{ijpt} - \sum_{k \in \mathcal{K}, (p,p') \in \mathcal{Q}} X_{jkpp't} \quad \forall j \in \mathcal{J}, p \in \mathcal{P}, t \in \mathcal{T}^{harv} \quad (9)$$

$$\sum_{p \in \mathcal{P}} S_{jpt} \leq \text{CAP}_j^{stor} \quad \forall j \in \mathcal{J}, t \in \mathcal{T} \quad (10)$$

$$\sum_{i \in \mathcal{I}, p \in \mathcal{P}} X_{ijpt} \leq \text{CAP}_j^{proc} \quad \forall j \in \mathcal{J}, t \in \mathcal{T}^{harv} \quad (11)$$

$$\sum_{j \in \mathcal{J}, (p',p) \in \mathcal{Q}} X_{jkp'pt} \leq D_{kpt}^{\max} \quad \forall k \in \mathcal{K}, p \in \mathcal{P}, t \in \mathcal{T}^{harv} \quad (12)$$

$$z_{ist} \in \{0, 1\} \quad \forall i \in \mathcal{I}, (s, t) \in \mathcal{S} \quad (13)$$

$$Y_{ipt}, X_{ijpt}, X_{jkp'pt}, S_{jpt} \geq 0 \quad \forall i, j, k, p, p', t \quad (14)$$

586 The yield coefficients η_{pa} in (8) are the critical bridge between the stand-level growth
 587 model of Chapter~2 and the supply chain optimisation. For stand age $a = t - s$ and
 588 product component p , they are computed as:

$$\eta_{pa} = f_p(a) \cdot M^{sl}(a) = \frac{h_p(a)}{\sum_{p'} h_{p'}(a)} \cdot a^\infty \cdot e^{-e^{-b'^1 \cdot (a-\tau)}}, \quad (15)$$

589 where $M^{sl}(a)$ follows from (??) and $f_p(a)$ follows from (??). For poplar clone Max~3 un-
 590 der SRAFS conditions, the component-specific Gompertz parameterisations from Section
 591 2.2 imply that $\eta_{stem,a}$ rises steeply between ages~4 and 10, while $\eta_{branch,a}$ and $\eta_{residue,a}$
 592 plateau earlier, as illustrated in Figure~??. This age-dependence of product fractions is
 593 the core mechanism through which rotation-length decisions — governed by $A^{\min}$ and
 594 $A^{\max}$ and the arc set $\mathcal{S}$ — determine achievable product portfolios and, hence, revenues
 595 in the objective function (5).

596 4. Case Study

597 The proposed MILP model is intended to support the design of agroforestry biomass
598 supply chains for cleaner production in specific regional contexts. In a forthcoming case
599 study, we focus on poplar-based alley-cropping systems in a temperate European setting,
600 informed by empirical data from SRAFS trials in Southern Germany and SRC plantations
601 in Central Europe (Huber et al., 2018; Trnka et al., 2008; Testa et al., 2014).

602 4.1. Study Region and Supply Chain Configuration

603 The proposed AFS-SCD model is instantiated on a real-world biomass supply chain lo-
604 cated in the tri-state region of Saxony-Anhalt, northern Thuringia, and northern Saxony,
605 Germany (Figure 6). This region combines the highest density of registered short-rotation
606 coppice (SRC) Feldblöcke in eastern Germany with a cluster of major wood-processing
607 industries that collectively represent one of the largest forest-based biomass demand cen-
608 tres in Central Europe. The spatial extent of the study region covers approximately
609 250×200 km, with road distances between potential KUP sites and consumer locations
610 ranging from under 10 km to over 180 km.

611 The supply chain comprises three node types: (i) KUP production sites $\mathcal{I}$, (ii) pre-
612 treatment and intermediate storage facilities $\mathcal{J}$, and (iii) consumer sites $\mathcal{K}$. Candidate
613 KUP sites are drawn from the official Feldblock register of Saxony-Anhalt, filtered to
614 parcels with a minimum area of 1 ha and classified as potentially suitable for SRC
615 under the InVeKoS land-use scheme. Following the two-stage spatial clustering procedure
616 described in Section-??, the $|\mathcal{I}| = 2239$ raw Feldblöcke are grouped into K super-sites
617 using DBSCAN ($\varepsilon = 15$ km, $minPts = 3$) and Ward.D2 hierarchical clustering (maximum
618 within-cluster radius 15 km), yielding a computationally tractable MILP instance while
619 preserving the total eligible area. The HAC cluster assignments, visible as distinct colour
620 zones in Figure 6, confirm a spatially coherent partitioning: dense KUP corridors along
621 the Elbe and Saale floodplains form contiguous super-sites, while isolated parcels in the
622 Harz foothills constitute smaller or singleton clusters.

623 Two types of intermediate infrastructure nodes are considered: conventional sawmills
624 and logistics hubs. Sawmills perform primary mechanical processing (debarking, chip-
625 ping) and can serve product streams P1 and P2; logistics hubs serve as consolidation

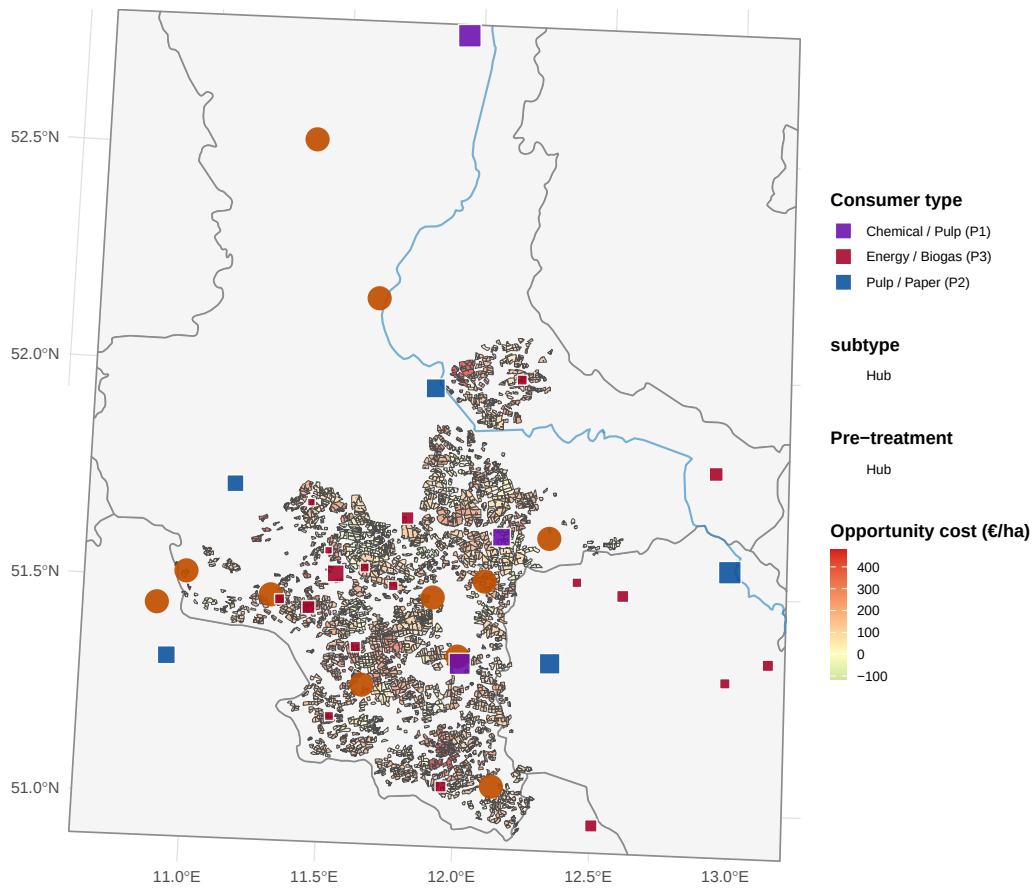


Figure 6: AFS supply chain network in Saxony-Anhalt. Grey lines: German federal state boundaries. Blue lines: major rivers. Coloured polygons: potential KUP/AFS sites grouped by HAC super-site (colours encode cluster membership; no legend). Orange symbols: pre-treatment facilities (circle = sawmill, triangle = logistics hub, size proportional to processing capacity). Coloured squares: consumer sites (violet: P1 chemical/pulp, blue: P2 pulp/paper, red: P3 energy/biogas, size proportional to total demand).

and temporary storage points for all three product grades and are characterised by lower capital intensity but limited processing capacity. The $|\mathcal{J}| = 11$ candidate storage/pre-treatment locations are sourced from publicly registered forestry enterprises and existing logistic nodes in the study region. Road distances d_{ij} (site i to storage j) and d_{jk} (storage j to consumer k) are computed via the OSRM open-source routing engine using the German road network, providing realistic transport cost estimates that are embedded directly in the MILP objective.

4.2. Consumer Demand and Product Classification

Nine consumer sites are included in the base case ($|\mathcal{K}| = 9$), covering the full quality cascade from high-value chemical/pulp applications down to energy use (Table 4). Consumer demands $D_{kpt}^{\max}$ are derived from publicly reported annual throughput figures, production capacities, and regulatory filings, and are held constant across periods ($D_{kpt}^{\max} = D_{kp}^{\max} \forall t \in \mathcal{T}$) to reflect stable long-term offtake contracts.

Three biomass product grades are distinguished, reflecting the cascading-use principle embedded in the AFS-SCD objective:

- **P1 – Chemical/pulp grade** ($p = 1$): long-fibre hardwood chips suitable for chemical pulping and biorefinery conversion. Dominated by Mercer Stendal GmbH (Arneburg, 1{,}500 kt/yr) and Zellstoff Rosenthal/Mercer (Blankenstein, 1{,}000 kt/yr), which together account for 403% of total P1 demand. UPM Biochemicals (Leuna) contributes 500 kt/yr of high-purity beech-fraction demand for biochemical conversion. Gate prices for P1 range from 80 to 120 €/t wood input.
- **P2 – Sawlog/pulpwood grade** ($p = 2$): roundwood and chipped material suitable for mechanical processing in sawmills. Demand is distributed across six smaller facilities with individual annual demands of 5–300 kt/yr. Gate prices range from 55 to 75 €/t.
- **P3 – Energy/pellets grade** ($p = 3$): residual wood fractions (chips, bark, off-cuts) used for heat and electricity generation or pellet production. This grade absorbs material that cannot meet P1 or P2 quality thresholds, operationalising the cascade constraint in the MILP. Gate prices range from 30 to 40 €/t.

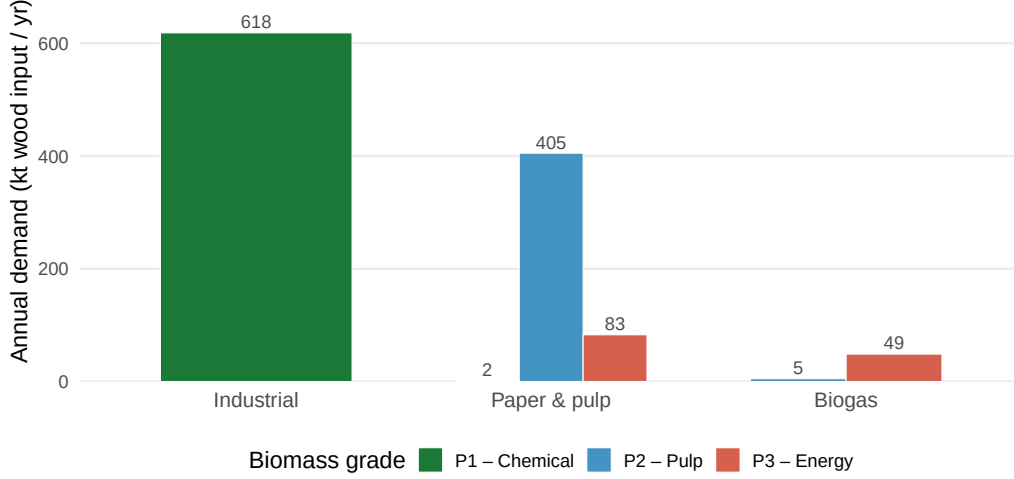


Figure 7: Total biomass demand by consumer type and grade (P1 chemical, P2 pulp & paper, P3 energy/biogas). Bars show aggregated annual demand in kt wood input per year across all individual plants within each consumer type.

655 The demand derivation follows a three-step procedure. First, publicly available ca-
 656 pacity data (kt wood input per year) are collected for each facility from official sources,
 657 industry reports, and corporate disclosures (Mercer Stendal GmbH, 2024; UPM Bio-
 658 chemicals, 2024). Second, the total annual capacity is assigned to the product grade that
 659 corresponds to the primary feedstock of each facility (P1 for chemical/biorefinery pro-
 660 cesses, P2 for mechanical sawmilling, P3 for thermal conversion and pellet lines). Third, a
 661 minor P3 component is added to sawmill facilities to capture by-product streams (bark,
 662 sawdust), consistent with observed industrial practice. The resulting demand matrix
 663 $D_{kp}^{\max}$ (kt/yr) is shown in Figure 7 and summarised in Table 4. Aggregate demand across
 664 the study region totals 620.5 kt/yr for P1, 410 kt/yr for P2, and 131.7 kt/yr for P3.

665 4.3. MILP Model Parameters

666 Table 5 summarises all scalar parameters of the AFS-SCD instance. The planning
 667 horizon covers $|\mathcal{T}| = 15$ periods, corresponding to one full poplar rotation (years 1–15),
 668 with a minimum harvest age $a^{\min} = 4$ and maximum productive stand age $a^{\max} =$
 669 15 (Lehmkuhl et al., 2023). Biomass yield functions η_{pa} (odt ha⁻¹ yr⁻¹) follow the
 670 age-structured Chapman-Richards profile calibrated in Section~??, where distinct yield

curves are assigned to each product grade to reflect the fraction of stem, branch, and foliage biomass that qualifies under each quality threshold.

Transport costs are disaggregated into two components reflecting the two-echelon logistics structure. Raw material transport from site i to pre-treatment facility j incurs a variable cost $c^{tr-raw} \cdot d_{ij}$ ($\text{€ t}^{-1} \text{ km}^{-1}$), while processed material transport from j to consumer k is costed at $c^{tr-pre} \cdot d_{jk}$. The pre-treatment rate c^{tr-pre} is set lower than c^{tr-raw} to reflect the higher load density and standardised packaging of chipped and pelletised material compared to loose roundwood. An opportunity cost parameter c^{opp} ($\text{€ ha}^{-1} \text{ yr}^{-1}$) accounts for foregone agricultural revenue on converted parcels, calibrated to the average arable land rental rate in Saxony-Anhalt (Statistisches Bundesamt (Destatis), 2023). Storage capacity at each facility j is bounded by $\bar{S}_j$, and processing capacity by $\bar{C}_j$ (kt yr^{-1}), both drawn from publicly available facility data.

4.4. Optimization results

5. Conclusion

6. Appendix

References

- Mohsen Arabi, Saeed Yaghoubi, and Hamed Tajik. Optimal design of a microalgae-based biofuel supply chain with co2 reduction and hydrogen production. *Computers & Chemical Engineering*, 130:106530, 2019. ISSN 0098-1354. doi: 10.1016/j.compchemeng.2019.106530.
- Claudia Cambero and Taraneh Sowlati. Assessment and optimization of forest biomass supply chains from economic, social and environmental perspectives—a review of literature. *Renewable and Sustainable Energy Reviews*, 36:62–73, 2014. ISSN 1364-0321. doi: 10.1016/j.rser.2014.04.041.
- Vincenzo Civitarese, Andrea Acampora, Giulio Sperandio, Alberto Assirelli, and Rodolfo Picchio. Production of wood pellets from poplar trees managed as coppices with different harvesting cycles. *Energies*, 12(15):2973, 2019. doi: 10.3390/en12152973. Open access.
- Anouck De Meyer, Dirk Cattrysse, Jussi Rasinmäki, and Jos Van Orshoven. Methods to optimise the design and management of biomass-for-bioenergy supply chains: A review. *Renewable and Sustainable Energy Reviews*, 31:657–670, 2014. ISSN 1364-0321. doi: 10.1016/j.rser.2013.12.036.
- Anouck De Meyer, Dirk Cattrysse, and Jos Van Orshoven. A generic mathematical model to optimise strategic and tactical decisions in biomass-based supply chains (OPTIMASS). *European Journal of Operational Research*, 249(1):293–307, 2016. ISSN 0377-2217. doi: 10.1016/j.ejor.2015.08.003.

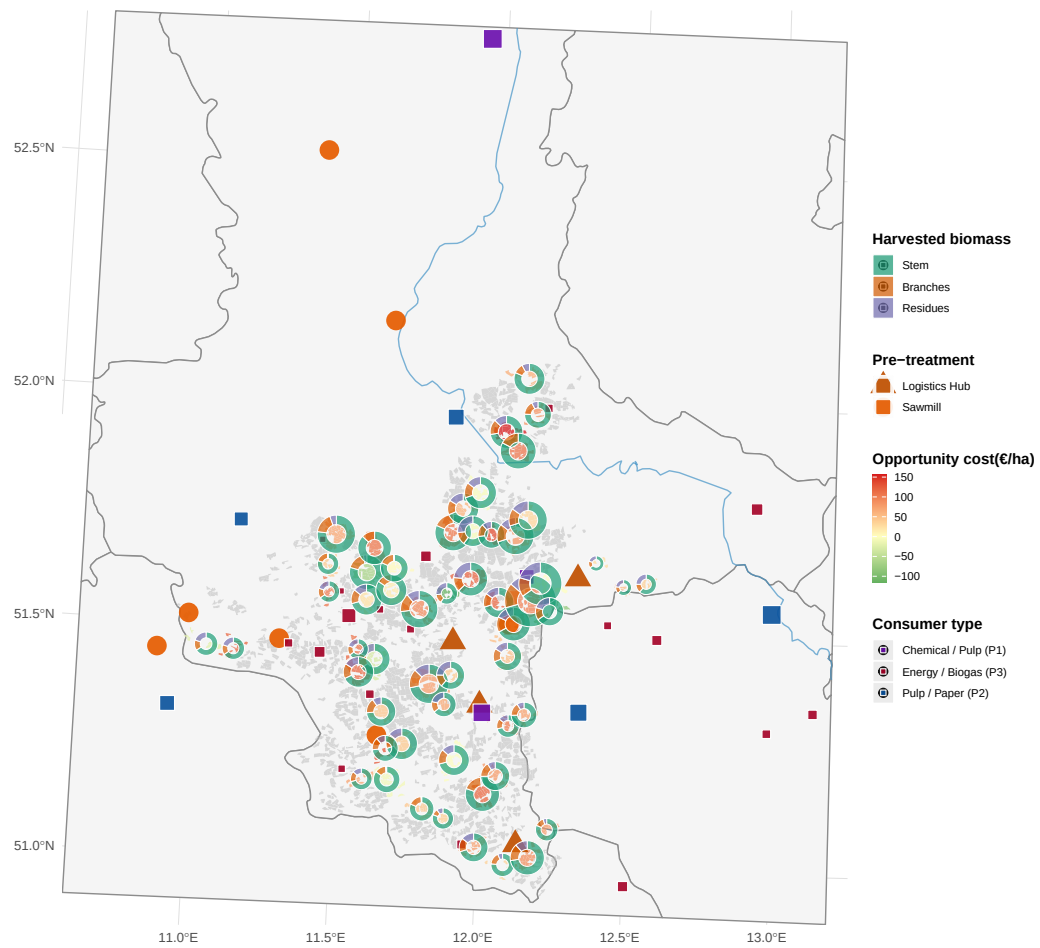


Figure 8: Optimal agroforestry supply chain network. Green polygons: active super-sites with biomass harvest; grey polygons: non-selected sites. Pie charts at active sites show the product mix of harvested biomass (stem = P1, branches = P2, residues = P3), scaled by total harvested volume. Orange symbols: pre-treatment facilities (circle = sawmill, triangle = logistics hub). Coloured squares: consumer sites by dominant demand category.

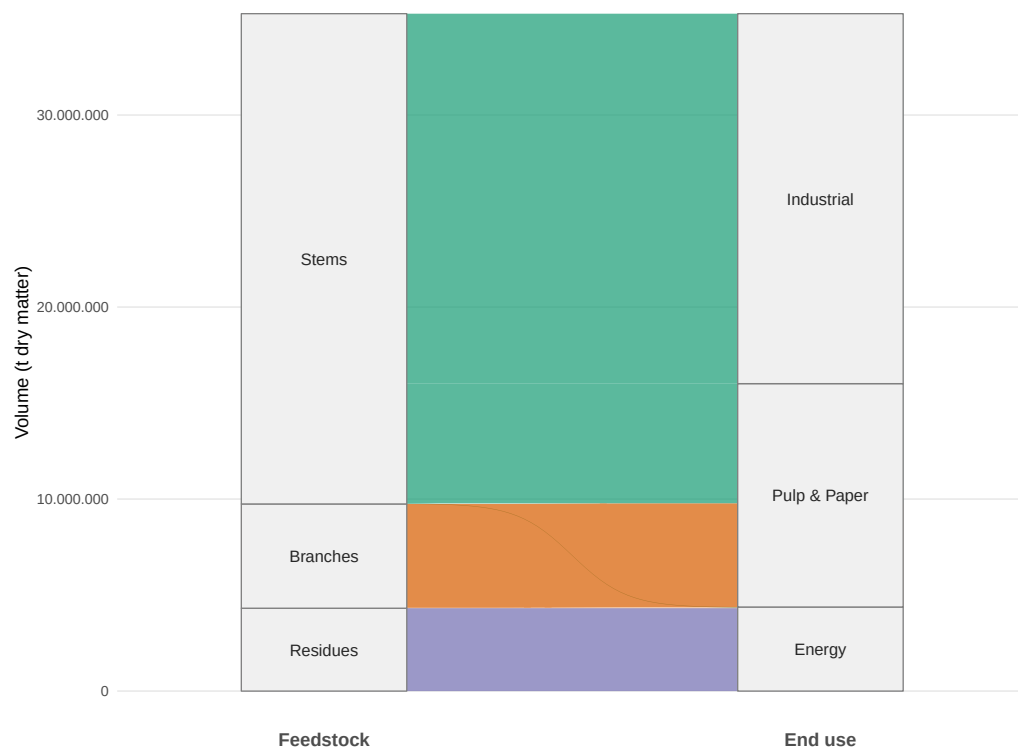


Figure 9: Total production quantity of biomass types and its industrial usage over planning horizon (in tons).

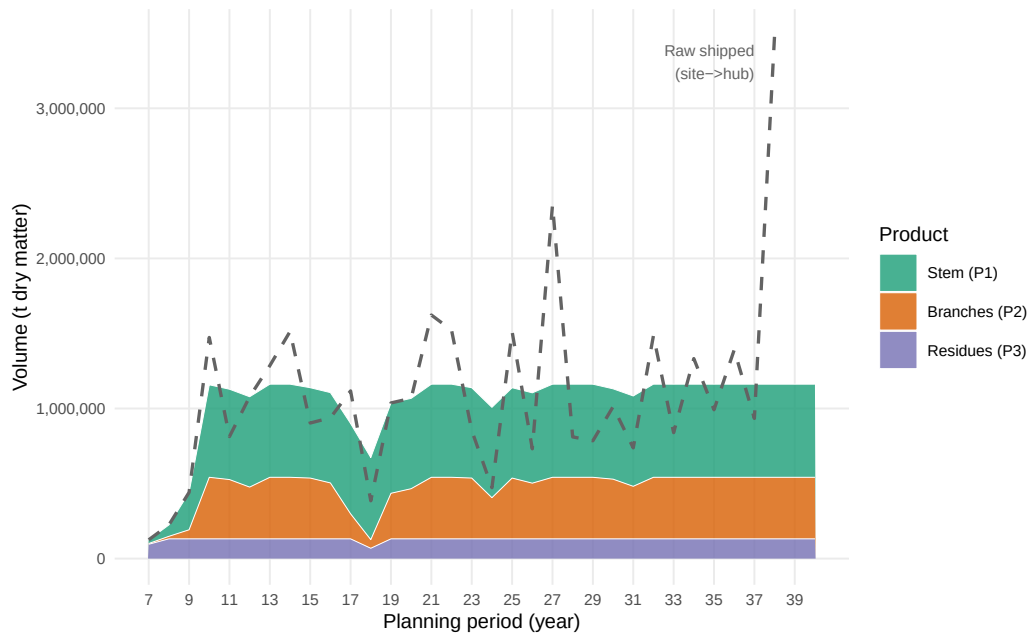


Figure 10: Total biomass delivered to consumers by product type over the planning horizon. Stacked areas show period-level volumes of stem (P1), branches (P2), and residues (P3) flowing from storage hubs to all consumers. Dashed line: total harvested raw biomass shipped from sites to hubs.

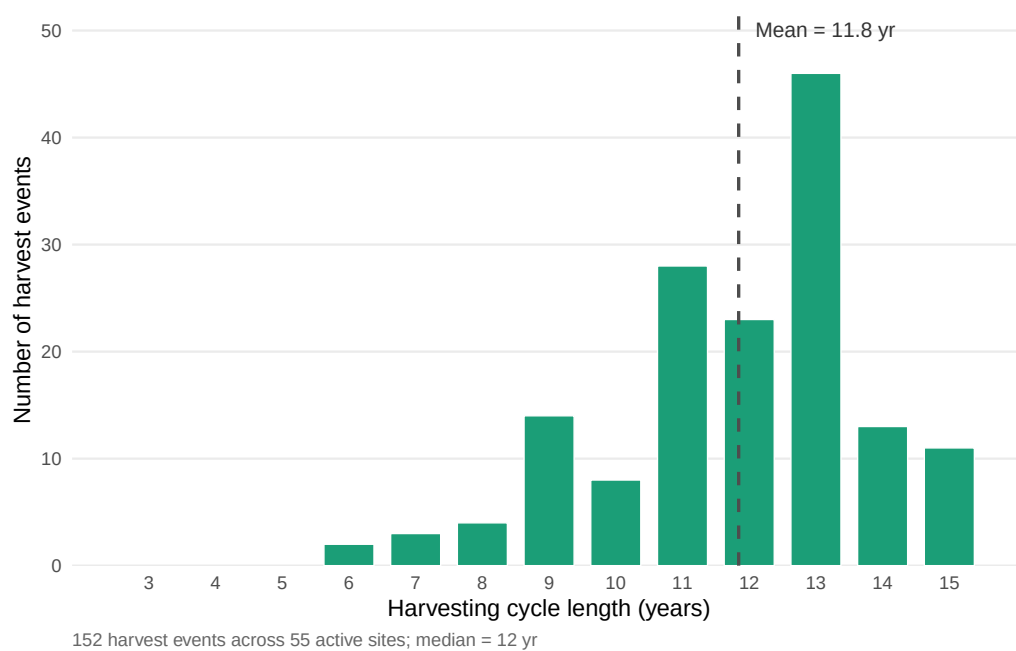


Figure 11: Distribution of harvesting cycle lengths at active agroforestry sites. Each bar represents the number of individual harvest events (over all periods and active sites) whose cycle length (stand age at harvest, i.e. $t - s$) falls in that year bin. Vertical dashed line: mean cycle length. Active sites are defined as sites with at least one selected harvest arc in the optimal solution.

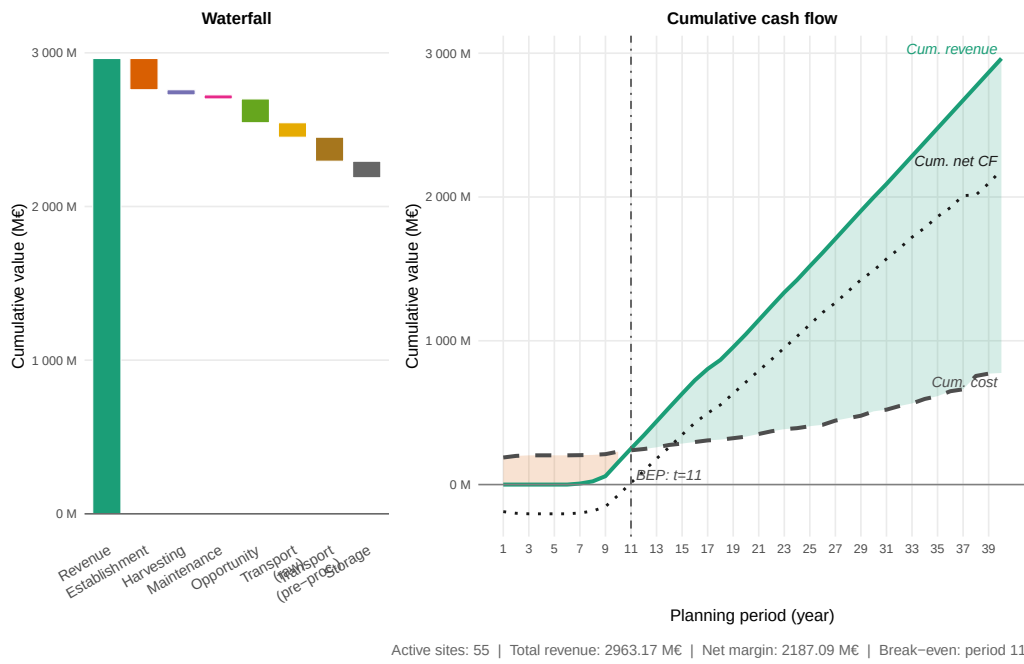


Figure 12: Total cost–profit breakdown across all active sites over the planning horizon. The left panel (waterfall) decomposes the objective value into revenue and individual cost categories; the right panel shows the period-level trajectory of revenues and stacked costs. Cultivation costs are split into establishment, harvesting, maintenance, and opportunity costs; logistics costs cover raw biomass transport (site→hub) and pre-processed transport (hub→consumer); storage costs reflect hub inventory holding charges.

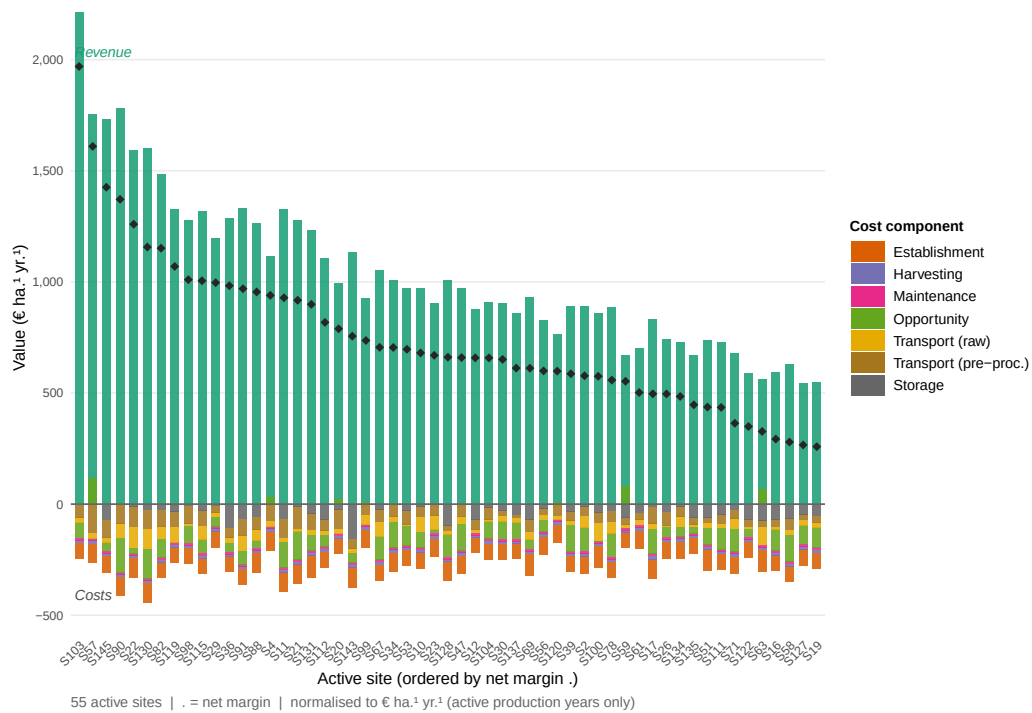


Figure 13: Total revenue and cost breakdown per active agroforestry site over the full planning horizon. Each bar represents one active site; revenue (green, above zero axis) and cost components (stacked below) are expressed in thousand euros per hectare for comparability across sites of different size. Sites are ordered by descending net margin.

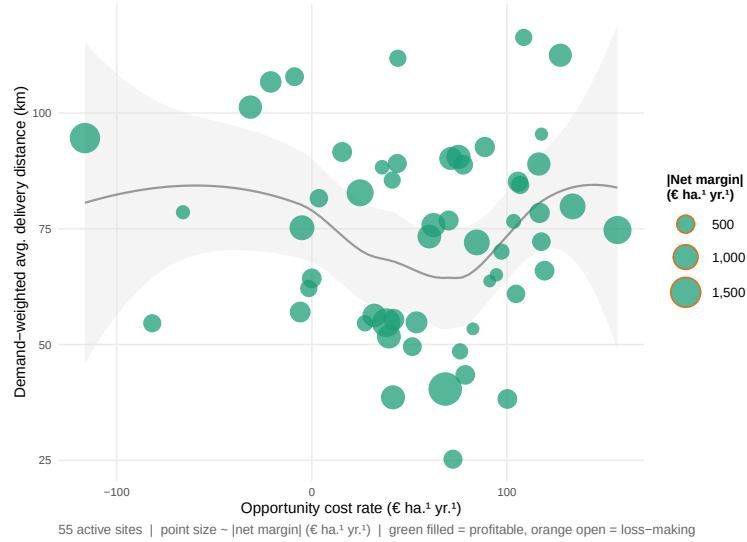


Figure 14: Scatterplot of active agroforestry sites: opportunity cost rate (€ ha⁻¹ yr.⁻¹) on the x-axis versus demand-weighted average delivery distance (km) on the y-axis. Point size is proportional to the site's net margin (€ ha⁻¹ yr.⁻¹); sites with negative net margin are shown as open circles. A LOESS smoothing line indicates the joint trend.

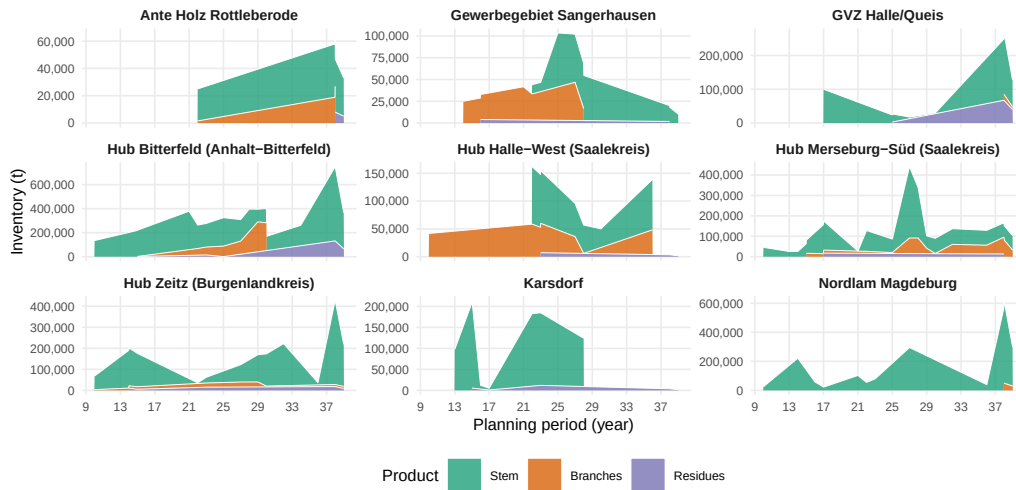


Figure 15: End-of-period inventory levels at storage/pre-treatment hubs, disaggregated by product type. Each panel corresponds to one active hub.

- 702 Sandra Duni Ekşioğlu, Aditya Acharya, Lawrence E. Leightley, and Sumit Arora. Analyzing the design
703 and management of biomass-to-biorefinery supply chain. *Computers & Industrial Engineering*, 57(4):
704 1342–1352, 2009. ISSN 0360-8352. doi: 10.1016/j.cie.2009.07.003.
- 705 Victor Espinoza, Selene Bautista, Patricia C. Narvaez, Mauricio Alfaro, and Mauricio Camargo. Sustain-
706 ability assessment to support governmental biodiesel policy in Colombia: A system dynamics model.
707 *Journal of Cleaner Production*, 141:1145–1163, 2017. ISSN 0959-6526. doi: 10.1016/j.jclepro.2016.09.
708 168.
- 709 Ralf J. Faasch and Gaia Patenaude. The economics of short rotation coppice in Germany. *Biomass and*
710 *Bioenergy*, 45:27–40, 2012. ISSN 0961-9534. doi: 10.1016/j.biombioe.2012.04.012.
- 711 Anil R. Graves, Paul J. Burgess, Fabrice Liagre, Andrea Pisanelli, Patrice Paris, Gerardo Moreno,
712 Manuel Bellido, Manuela Mayus, Meindert Postma, Bernhard Schindler, Konstantinos Mantzanas,
713 and Christian Dupraz. Development and application of bio-economic modelling to compare silvoarable,
714 arable, and forestry systems in three European countries. *Ecological Engineering*, 29(4):434–449, 2007.
715 ISSN 0925-8574. doi: 10.1016/j.ecoleng.2006.09.018.
- 716 Henning Grunewald, Reinhold Böcker, B. Ulrich Schneider, Oliver Bens, and Reinhard F. Hüttel. Biomass
717 production of black locust (*Robinia pseudoacacia* L.) short rotation plantations in Germany: growth
718 and economics of different clones and management practices. *Bioresource Technology*, 98(2):281–286,
719 2007. ISSN 0960-8524. doi: 10.1016/j.biortech.2006.01.004.
- 720 Georg Huber, Kurt-Jürgen Hülsbergen, and Harald Schmid. Allometric equations for above-ground tree-
721 biomass estimation in Southern German short-rotation agroforestry systems. *Bioenergy Research*, 9
722 (3):955–968, 2016. ISSN 1939-1234. doi: 10.1007/s12155-016-9744-z.
- 723 Georg Huber, Christian Amann, Kurt-Jürgen Hülsbergen, and Harald Schmid. Yield potential of tree
724 species in organic and conventional short-rotation agroforestry systems in Southern Germany. *Heliyon*,
725 4(1):e00543, 2018. ISSN 2405-8440. doi: 10.1016/j.heliyon.2018.e00543.
- 726 Kaushalendra Kumar Jha. Biomass production and carbon balance in two hybrid poplar (*populus*
727 *euramericana*) plantations raised with and without agriculture in southern France. *Journal of Forestry*
728 *Research*, 29(6):1689–1701, 2018. ISSN 1007-662X. doi: 10.1007/s11676-017-0555-3.
- 729 Patrick Lamers, Martin Junginger, Carlo Hamelinck, and André Faaij. Developments in liquid biofuels
730 commodity trade. *Biofuels, Bioproducts and Biorefining*, 5(4):403–437, 2011. ISSN 1932-104X. doi:
731 10.1002/bbb.303.
- 732 Frank Lehmkuhl, Alexander Stauch, Roman Schneider, Franziska Feil, and Henning Grunewald. Short-
733 rotation coppice with poplar and willow in Germany: Biomass potentials, rotation lengths, and land-
734 use interactions. *Biomass and Bioenergy*, 176:106908, 2023. ISSN 0961-9534. doi: 10.1016/j.biombioe.
735 2023.106908.
- 736 Krishna Teja Malladi and Taraneh Sowlati. Biomass logistics: A review of important features, optimiza-
737 tion modelling and the new trends. *Renewable and Sustainable Energy Reviews*, 94:587–599, 2018.
738 ISSN 1364-0321. doi: 10.1016/j.rser.2018.06.052.
- 739 Babak Mansoornejad, Efstratios N. Pistikopoulos, and Paul R. Stuart. Integrating forest biorefinery
740 metrics into supply chain design and analysis. *Forest Policy and Economics*, 26:43–54, 2013. ISSN

1389-9341. doi: 10.1016/j.forpol.2012.08.003.

Mercer Stendal GmbH. Mercer stendal: Zellstoffwerk Arneburg – kapazitäten und rohstoffversorgung. Unternehmenswebsite, 2024. URL <https://www.mercerint.com/de/stendal/>. Abgerufen: April 2026.

P. K. Ramachandran Nair. *An Introduction to Agroforestry*. Kluwer Academic Publishers, Dordrecht, 1993. ISBN 978-0-7923-2134-7.

Marcin Niemczyk and Brian R. Thomas. Does intensive management affect wood density and fiber properties of hybrid poplar grown in short-rotation plantation? *Forests*, 12(4):399, 2021. ISSN 1999-4907. doi: 10.3390/f12040399.

Bhavna Sharma, Robert G. Ingalls, Christopher L. Jones, and Ajay Khanchi. Biomass supply chain design and analysis: Basis, overview, modeling, challenges, and future. *Renewable and Sustainable Energy Reviews*, 24:608–627, 2013. ISSN 1364-0321. doi: 10.1016/j.rser.2013.03.049.

Raffaele Spinelli, Carla Nati, and Natascia Magagnotti. Using modified foragers to harvest short-rotation poplar plantations. *Biomass and Bioenergy*, 33(5):817–821, 2009. ISSN 0961-9534. doi: 10.1016/j.biombioe.2009.01.002.

Statistisches Bundesamt (Destatis). Kaufwerte und pachtpreise für landwirtschaftliche grundstücke 2022 – Fachserie 3 Reihe 2.4. Technical report, Statistisches Bundesamt, Wiesbaden, 2023. URL <https://www.destatis.de/DE/Themen/Branchen-Unternehmen/Landwirtschaft-Forstwirtschaft-Fischerei/Flaechennutzung/Publicationen/Downloads-Flaechennutzung/kaufwerte-landwirtschaft-2030240227004.pdf>. Pachtpreise Sachsen-Anhalt, Tabelle 3.1.

Riccardo Testa, Anna Maria Di Trapani, Mario Foderà, Filippo Sgroi, and Salvatore Tudisca. Economic evaluation of introduction of poplar as biomass crop in Italy. *Renewable and Sustainable Energy Reviews*, 38:498–506, 2014. ISSN 1364-0321. doi: 10.1016/j.rser.2014.07.007.

Eric Toensmeier. The carbon farming solution: A global toolkit of perennial crops and regenerative agriculture practices for climate change mitigation and food security. In *The Carbon Farming Solution*. Chelsea Green Publishing, White River Junction, VT, 2017. ISBN 978-1-60358-571-2.

Miroslav Trnka, Jana Fialová, Vladimír Koutecký, Milan Fajman, Zdeněk Žalud, and Milan Havlíček. Biomass production and survival rates of selected poplar clones grown under a short-rotation system on agricultural land. *Plant, Soil and Environment*, 54(2):78–88, 2008. ISSN 1214-1178. doi: 10.17221/2752-PSE.

UPM Biochemicals. UPM biochemicals leuna: Bioraffinerie für laubholz-biomassekonversion. Unternehmenswebsite, 2024. URL <https://www.upmbiochemicals.com/de/>. Abgerufen: April 2026.

Dajun Yue, Fengqi You, and Seth W. Snyder. Biomass-to-bioenergy and biofuel supply chain optimization: Overview, key issues and challenges. *Computers & Chemical Engineering*, 66:36–56, 2014. ISSN 0098-1354. doi: 10.1016/j.compchemeng.2013.11.016.

Sayed Mojib Zahraee, Nirajan Shiwakoti, and Peter Stasinopoulos. Biomass supply chain environmental, economic, and social sustainability: A systematic literature review. *Industrial Crops and Products*, 145:112144, 2020. ISSN 0926-6690. doi: 10.1016/j.indcrop.2020.112144.

Table 3: Notation for the MILP model.

Sets & Indices	
$i \in \mathcal{I}$	Agroforestry sites
$j \in \mathcal{J}$	Storage / pre-treatment facilities
$k \in \mathcal{K}$	Consumer sites
$p \in \mathcal{P}$	Product types (stem, branches, residues)
$(p, p') \in \mathcal{Q}$	Admissible product-substitution pairs (quality cascade)
$\mathcal{T} = \{1, \dots, T_{\max}\}$	Planning periods (years)
$\mathcal{T}^+ = \{0, \dots, T_{\max} + 1\}$	Extended time set incl. dummy nodes
$\mathcal{T}^{\text{harv}} = \{A^{\min} + 1, \dots, T_{\max}\}$	Feasible harvest periods
$\mathcal{S}^{\text{est}} = \{(0, t) \mid t \in \{1, \dots, T_{\max} - A^{\min}\}\}$	Establishment arcs: dummy source to period t
$\mathcal{S}^{\text{harv}} = \{(s, t) \mid s, t \in \mathcal{T}, t - s \in \{A^{\min}, \dots, A^{\max}\}\}$	Harvest cycles within age-lag bounds
$\mathcal{S}^{\text{term}} = \{(s, T_{\max} + 1) \mid s \in \{A^{\min} + 1, \dots, T_{\max}\}\}$	Termination arcs to dummy sink $T_{\max} + 1$
$\mathcal{S} = \mathcal{S}^{\text{est}} \cup \mathcal{S}^{\text{harv}} \cup \mathcal{S}^{\text{term}}$	Age-lag arc set (establishment $\cup$ harvest $\cup$ termination)
Decision Variables	
$z_{ist} \in \{0, 1\}$	1 if s and t are consecutive harvest cycles at site i
$Y_{ipt} \geq 0$	Harvest quantity (t) of product p at site i in period t
$X_{ijpt} \geq 0$	Transport flow (t) of p from site i to facility j in t
$X_{jkpp't} \geq 0$	Flow of p from facility j to consumer k satisfying demand p' in t
$S_{jpt} \geq 0$	Inventory (t) of product p at facility j end of period t
Parameters	
$T_{\max}$	Length of planning horizon (years)
$A^{\min}, A^{\max}$	Minimum / maximum stand age at harvest (years)
AREA_i	Area of site i (ha)
η_{pa}	Yield coefficient (t/ha) of product p at stand age a , derived from (??)–(??)
R_{kp}	Revenue (€/t) for product p at consumer k
C_i^{est}	Establishment cost (€/ha) at site i
C_i^{opp}	Annual opportunity cost (€/ha) at site i
C_i^{harv}	Harvest & refitting cost (€/ha) at site i
$c^{\text{tr-raw}}$	Transport cost rate (€/t km) for raw biomass
$c^{\text{tr-pre}}$	Transport cost rate (€/t km) for pre-treated biomass
c_j^{stor}	Storage holding cost (€/t) at facility j
d_{ij}, d_{jk}	Distance (km) between nodes
$\text{CAP}_j^{\text{stor}}$	Storage capacity (t) at facility j
$\text{CAP}_j^{\text{proc}}$	Processing throughput capacity (t/period) at facility j
$D_{kpt}^{\max}$	Maximum demand (t) of product p at consumer k in period t

Table 4: Consumer demand quantities and gate prices by product grade. P1: chemical/pulp; P2: sawlog/pulpwood; P3: energy/pellets. Demands in kt wood input per year; prices in €/t wood input at the factory gate.

Consumer	Annual demand			Gate price		
	P1 (kt/yr)	P2 (kt/yr)	P3 (kt/yr)	P1 (€/t)	P2 (€/t)	P3 (€/t)
consumer 1	300.0	–	–	100	–	–
consumer 2	100.0	–	–	120	–	–
consumer 3	–	300	50.0	–	75	40
consumer 4	200.0	–	–	95	–	–
consumer 5	–	30	5.0	–	70	35
consumer 6	–	15	5.0	–	65	35
consumer 7	–	10	3.0	–	60	30
consumer 8	–	5	8.0	–	55	30
consumer 9	2.0	50	20.0	80	70	38
consumer 10	–	–	1.7	–	–	35
consumer 11	–	–	2.9	–	–	35
consumer 12	–	–	2.5	–	–	35
consumer 13	–	–	2.3	–	–	35
consumer 14	–	–	1.9	–	–	35
consumer 15	–	–	2.7	–	–	35
consumer 16	–	–	1.7	–	–	35
consumer 17	–	–	1.9	–	–	35
consumer 18	–	–	1.6	–	–	35
consumer 19	–	–	1.5	–	–	35
consumer 20	–	–	1.5	–	–	35
consumer 21	–	–	1.8	–	–	35
consumer 22	–	–	3.5	–	–	35
consumer 23	–	–	1.6	–	–	35
consumer 24	–	–	2.1	–	–	35
consumer 25	–	–	4.5	–	–	35
consumer 26	–	–	1.8	–	–	35
consumer 27	–	–	3.2	–	–	35
consumer 28	18.5	–	–	55	–	–

Table 5: AFS-SCD base-case parameter values for the Saxony-Anhalt case study. Transport costs refer to road distance (OSRM). Gate prices are weighted averages across consumer sites.

Parameter	Description	Base-case value	Unit
Index sets			
$ \mathcal{T} $	Planning periods	15	yr
$ \mathcal{I} $	KUP super-sites (post-clustering)	K (clustering-dependent)	–
$ \mathcal{J} $	Pre-treatment / storage nodes	11	–
$ \mathcal{K} $	Consumer sites	9	–
$ \mathcal{P} $	Product grades	3	–
Biomass dynamics			
$a^{\min}$	Minimum harvest age (years)	4	yr
$a^{\max}$	Maximum stand age (years)	15	yr
Cost parameters			
c^{tr-raw}	Raw transport cost	0.08	€ t ⁻¹ km ⁻¹
c^{tr-pre}	Pre-processed transport cost	0.05	€ t ⁻¹ km ⁻¹
c^{opp}	Opportunity cost (foregone arable rent)	280	€ ha ⁻¹ yr ⁻¹
Revenue parameters			
$\bar{R}_{P1}$	Mean gate price P1	99	€ t ⁻¹
$\bar{R}_{P2}$	Mean gate price P2	69	€ t ⁻¹
$\bar{R}_{P3}$	Mean gate price P3	36	€ t ⁻¹