eRPC Getting Started User's Guide



Contents

Chapter 1 Overview	
Chapter 2 Create an eRPC application	4
Chapter 3 eRPC example	5
3.1 Designing the eRPC application	
3.2 Creating the IDL file	
3.3 Using the eRPC generator tool	
3.4 Create an eRPC application	
3.4.1 Multicore server application	8
3.4.1.1 Server project basic source files	8
3.4.1.2 Server related generated files	10
3.4.1.3 Server infrastructure files	10
3.4.1.4 Server multicore infrastructure files	13
3.4.1.5 Server user code	
3.4.2 Multicore client application	16
3.4.2.1 Client project basic source files	
3.4.2.2 Client-related generated files	
3.4.2.3 Client infrastructure files	
3.4.2.4 Client multicore infrastructure files	
3.4.2.5 Client user code	
3.4.3 Multiprocessor server application	
3.4.3.1 Server user code	
3.4.3.2 Multiprocessor client application	
3.4.3.2.1 Client user code	
3.4.4 Running the eRPC application	27
Chapter 4 Other uses for an eRPC implementation	28
Chapter 5 Revision history	29

Chapter 1 Overview

This *Getting Started User's Guide* shows software developers how to use Remote Procedure Calls (RPC) in embedded multicore microcontrollers (eRPC).

Additionally, see eRPC documentation located in the following folder: doc folder.

Chapter 2 Create an eRPC application

This section describes a generic way to create a client/server eRPC application:

- Design the eRPC application: Decide which data types are sent between applications, and define functions that send/ receive this data.
- 2. Create the IDL file: The IDL file contains information about data types and functions used in an eRPC application, and is written in the IDL language.
- 3. **Use the eRPC generator tool:** This tool takes an IDL file and generates the shim code for the client and the server-side applications.
- 4. Create an eRPC application:
 - a. Create two projects, where one project is for the client side (primary core) and the other project is for the server side (secondary core).
 - b. Add generated files for the client application to the client project, and add generated files for the server application to the server project.
 - c. Add infrastructure files.
 - d. Add user code for client and server applications.
 - e. Set the client and server project options.
- 5. **Run the eRPC application:** Run both the server and the client applications. Make sure that the server has been run before the client request was sent.

A specific example follows in the next section.

Chapter 3 eRPC example

This section shows how to create an example eRPC application called "Matrix multiply", which implements one eRPC function (matrix multiply) with two function parameters (two matrices). The client-side application calls this eRPC function, and the server side performs the multiplication of received matrices. The server side then returns the result.

For example, use the NXP LPCXpresso54114 board as the target dual-core platform, and the IAR Embedded Workbench® for ARM (EWARM) as the target IDE for developing the eRPC example.

- · The primary core (CM4) runs the eRPC client.
- The secondary core (CM0+) runs the eRPC server.
- RPMsg-Lite (Remote Processor Messaging Lite) is used as the eRPC transport layer.

The "Matrix multiply" application can be also run in the multi-processor setup. In other words, the eRPC client running on one SoC comunicates with the eRPC server that runs on anothe SoC, utilizing different transport channels. It is possible to run the board-to-PC example (PC as the eRPC server and a board as the eRPC client, and vice versa) and also the board-to-board example. These multiprocessor examples are prepared for selected boards only.

Multicore application source and project files	<pre><mcuxpressosdk_install_dir>/boards/lpcxpresso54114/ multicore_examples/erpc_matrix_multiply_rpmsg/</mcuxpressosdk_install_dir></pre>
Multiprocessor application source and project files	<pre><mcuxpressosdk_install_dir>/boards/<board_name>/ multiprocessor_examples/ erpc_client_matrix_multiply_<transport_layer>/</transport_layer></board_name></mcuxpressosdk_install_dir></pre>
	<pre><mcuxpressosdk_install_dir>/boards/<board_name>/ multiprocessor_examples/ erpc_server_matrix_multiply_<transport_layer>/</transport_layer></board_name></mcuxpressosdk_install_dir></pre>
eRPC source files	<pre><mcuxpressosdk_install_dir>/middleware/multicore/erpc/</mcuxpressosdk_install_dir></pre>
RPMsg-Lite source files	<pre><mcuxpressosdk_install_dir>/middleware/multicore/ rpmsg_lite/</mcuxpressosdk_install_dir></pre>

Table 1. File locations

3.1 Designing the eRPC application

The matrix multiply application is based on calling single eRPC function that takes 2 two-dimensional arrays as input and returns matrix multiplication results as another 2 two-dimensional array. The IDL file syntax supports arrays with the dimension length set by the number only (in the current eRPC implementation). Because of this, a variable is declared in the IDL dedicated to store information about matrix dimension length, and to allow easy maintenance of the user and server code.

For a simple use of the two-dimensional array, the alias name (new type definition) for this data type has is declared in the IDL. Declaring this alias name ensures that the same data type can be used across the client and server applications.

3.2 Creating the IDL file

The created IDL file is located in the following folder:

<MCUXpressoSDK_install_dir>/boards/lpcxpresso54114/multicore_examples/erpc_common/erpc_matrix_multiply/service/
erpc_matrix_multiply.erpc

The created IDL file contains the following code:

```
program erpc_matrix_multiply
/*! This const defines the matrix size. The value has to be the same as the
Matrix array dimension. Do not forget to re-generate the erpc code once the
matrix size is changed in the erpc file */
const int32 matrix_size = 5;
/*! This is the matrix array type. The dimension has to be the same as the
matrix size const. Do not forget to re-generate the erpc code once the
matrix size is changed in the erpc file */
type Matrix = int32[matrix_size][matrix_size];
interface MatrixMultiplyService {
  erpcMatrixMultiply(in Matrix matrix1, in Matrix matrix2, out Matrix result_matrix) ->
  void
}
```

Details:

- The IDL file starts with the program name (*erpc_matrix_multiply*), and this program name is used in the naming of all generated outputs.
- The declaration and definition of the constant variable named *matrix_size* follows next. The *matrix_size* variable is used for passing information about the length of matrix dimensions to the client/server user code.
- The alias name for the two-dimensional array type (Matrix) is declared.
- The interface group *MatrixMultiplyService* is located at the end of the IDL file. This interface group contains only one function declaration *erpcMatrixMultiply*.
- As shown above, the function's declaration contains three parameters of Matrix type: *matrix1* and *matrix2* are input parameters, while *result_matrix* is the output parameter. Additionally, the returned data type is declared as void.

When writing the IDL file, the following order of items is recommended:

- Program name at the top of the IDL file.
- 2. New data types and constants declarations.
- 3. Declarations of interfaces and functions at the end of the IDL file.

3.3 Using the eRPC generator tool

Table 2. eRPC generator application file locations

Windows [®] OS	<mcuxpressosdk_install_dir>/middleware/multicore/tools/ erpcgen/Windows</mcuxpressosdk_install_dir>
Linux [®] OS	<pre><mcuxpressosdk_install_dir>/middleware/multicore/tools/ erpcgen/Linux_x64</mcuxpressosdk_install_dir></pre>
	<pre><mcuxpressosdk_install_dir>/middleware/multicore/tools/ erpcgen/Linux_x86</mcuxpressosdk_install_dir></pre>
Mac [®] OS	<pre><mcuxpressosdk_install_dir>/middleware/multicore/tools/ erpcgen/Mac</mcuxpressosdk_install_dir></pre>

The files for the "Matrix multiply" example are pre-generated and already a part of the application projects. The following section describes how they have been created.

• The easiest way to create the shim code is to copy the erpcgen application to the same folder where the IDL file (*.erpc) is located; then run the following command:

```
erpcgen <IDL file>.erpc
```

In the "Matrix multiply" example, the command should look like:

```
erpcgen erpc_matrix_multiply.erpc
```

Additionally, another method to create the shim code is to execute the eRPC application using input commands:

- "-?"/"—help" Shows supported commands.
- "-o <filePath>"/"—output<filePath>" Sets the output directory.

For example,

```
<path_to_erpcgen>/erpcgen -o <path_to_output>
<path_to_IDL>/<IDL_file_name>.erpc
```

For the "Matrix multiply" example, when the command is executed from the default expecsen location, it looks like:

```
erpcgen -o
```

../../../boards/lpcxpresso54114/multicore_examples/erpc_common/erpc_matrix_multiply/service ../../../boards/lpcxpresso54114/multicore_examples/erpc_common/erpc_matrix_multiply/service/erpc_matrix_multiply.erpc

In both cases, the following four files are generated into the <mCUXpressoSDK_install_dir>/boards/lpcxpresso54114/multicore_examples/erpc_common/erpc_matrix_multiply/service folder.

- erpc matrix multiply.h
- erpc matrix multiply client.cpp
- erpc matrix multiply server.h
- erpc_matrix_multiply_server.cpp

For multiprocessor examples, the eRPC file and pre-generated files can be found in the MCUXpressoSDK_install_dir>/boards/ www.ncessor.org/www.ncessor.org/www.ncessor.org/www.ncessor.org/mailto:subsance://www.ncessor.org/www.ncessor.org/w

For Linux OS users:

- Do not forget to set the permissions for the eRPC generator application.
- Run the application as ./erpcgen... instead of as erpcgen

3.4 Create an eRPC application

This section describes a generic way to create a client/server eRPC application:

- Design the eRPC application: Decide which data types are sent between applications, and define functions that send/ receive this data.
- 2. Create the IDL file: The IDL file contains information about data types and functions used in an eRPC application, and is written in the IDL language.
- 3. **Use the eRPC generator tool:** This tool takes an IDL file and generates the shim code for the client and the server-side applications.
- 4. Create an eRPC application:
 - a. Create two projects, where one project is for the client side (primary core) and the other project is for the server side (secondary core).
 - b. Add generated files for the client application to the client project, and add generated files for the server application to the server project.
 - c. Add infrastructure files.

- d. Add user code for client and server applications.
- e. Set the client and server project options.
- 5. **Run the eRPC application:** Run both the server and the client applications. Make sure that the server has been run before the client request was sent.

A specific example follows in the next section.

3.4.1 Multicore server application

The "Matrix multiply" eRPC server project is located in the following folder:

<MCUXpressoSDK_install_dir>/boards/lpcxpresso54114/multicore_examples/erpc_matrix_multiply_rpmsg/cm0plus/iar/

The project files for the eRPC server have the <code>cmOplus</code> suffix.

3.4.1.1 Server project basic source files

The startup files, board-related settings, peripheral drivers, and utilities belong to the basic project source files and form the skeleton of all MCUXpresso SDK applications. These source files are located in:

- <MCUXpressoSDK_install_dir>/devices/<device>
- <MCUXpressoSDK install dir>/boards/<board name>/multicore examples/<example name>/

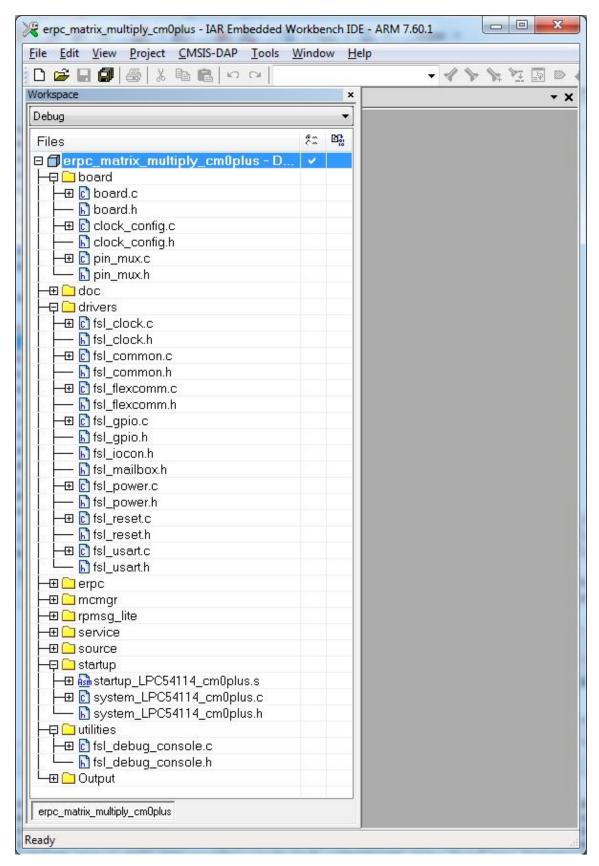


Figure 1. Server project basic source files

3.4.1.2 Server related generated files

The server-related generated files are:

- $erpc_matric_multiply.h$
- erpc matrix multiply server.h
- erpc matrix multiply server.cpp

The server-related generated files contain the shim code for functions and data types declared in the IDL file. These files also contain functions for the identification of client requested functions, data deserialization, calling requested function's implementations, and data serialization and return, if requested by the client. These shim code files can be found in the following folder:

<MCUXpressoSDK_install_dir>/boards/lpcxpresso54114/multicore_examples/erpc_common/erpc_matrix_multiply/service/

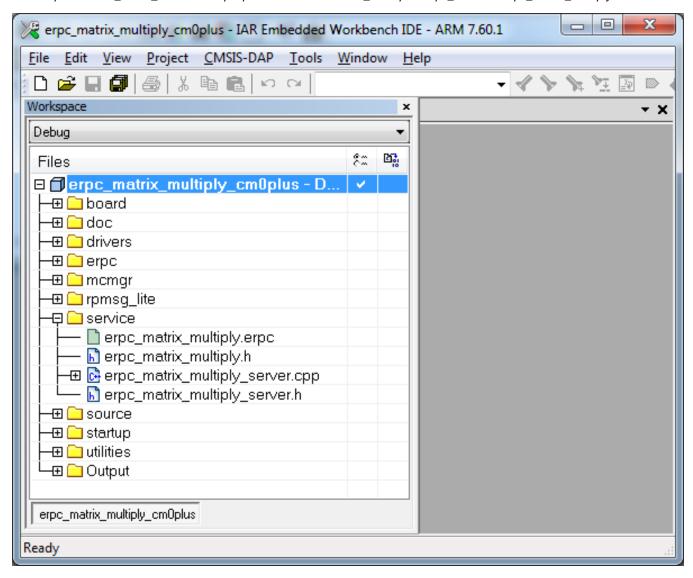


Figure 2. Server-related generated files

3.4.1.3 Server infrastructure files

The eRPC infrastructure files are located in the following folder:

<MCUXpressoSDK_install_dir>/middleware/multicore/erpc/erpc_c

The **erpc_c** folder contains files for creating eRPC client and server applications in C/C++. These files are distributed into subfolders.

- The **infra** subfolder contains C++ infrastructure code used to build server and client applications.
 - Four files, erpc_server.h, erpc_server.cpp, erpc_simple_server.h, and erpc_simple_server.cpp, are used for running the eRPC server on the server-side applications. The simple server is currently the only implementation of the server, and its role is to catch client requests, identify and call requested functions, and send data back when requested.
 - Three files (erpc_codec.h, erpc_basic_codec.h, and erpc_basic_codec.cpp) are used for codecs. Currently, the basic codec is the initial and only implementation of the codecs.
 - The erpc common.h file is used for common eRPC definitions, typedefs, and enums.
 - The erpc manually constructed.h file is used for allocating static storage for the used objects.
 - Message buffer files are used for storing serialized data: erpc_message_buffer.h and erpc_message_buffer.cpp.
 - The erpc transport.h file defines the abstract interface for transport layer.
- The port subfolder contains the eRPC porting layer to adapt to different environments.
 - erpc port.h file contains definition of erpc malloc() and erpc free() functions.
 - erpc_port_stdlib.cpp file ensures adaptation to stdlib.
 - erpc config internal.h internal erpc configuration file.
- The **setup** subfolder contains a set of plain C APIs that wrap the C++ infrastructure, providing client and server init and deinit routines that greatly simplify eRPC usage in C-based projects. No knowledge of C++ is required to use these APIs.
 - The erpc_server_setup.h and erpc_server_setup.cpp files needs to be added into the "Matrix multiply" example project to demonstrate the use of C-wrapped functions in this example.
 - The <code>erpc_transport_setup.h</code> and <code>erpc_setup_rpmsg_lite_remote.cpp</code> files needs to be added into the project in order to allow the C-wrapped function for transport layer setup.
 - The erpc_mbf_setup.h and erpc_setup_mbf_rpmsg.cpp files needs to be added into the project in order to allow message buffer factory usage.
- The **transports** subfolder contains transport classes for the different methods of communication supported by eRPC. Some transports are applicable only to host PCs, while others are applicable only to embedded or multicore systems. Most transports have corresponding client and server setup functions in the setup folder.
 - RPMsg-Lite is used as the transport layer for the communication between cores, erpc_rpmsg_lite_base_transport.h, erpc_rpmsg_lite_transport.h, and erpc_rpmsg_lite_transport.cpp files need to be added into the server project.

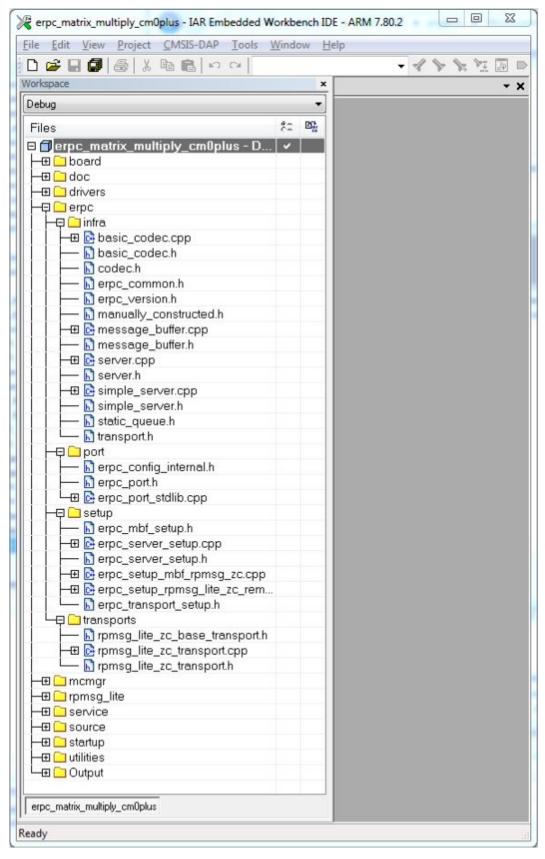


Figure 3. Server infrastructure files

3.4.1.4 Server multicore infrastructure files

Because of the RPMsg-Lite (transport layer), it is also necessary to include RPMsg-Lite related files, which are in the following folder:

<MCUXpressoSDK_install_dir>/middleware/multicore/rpmsg_lite/

The multicore example applications also use the Multicore Manager software library to control the secondary core startup and shutdown. These source files are located in the following folder:

<MCUXpressoSDK_install_dir>/middleware/multicore/mcmgr/

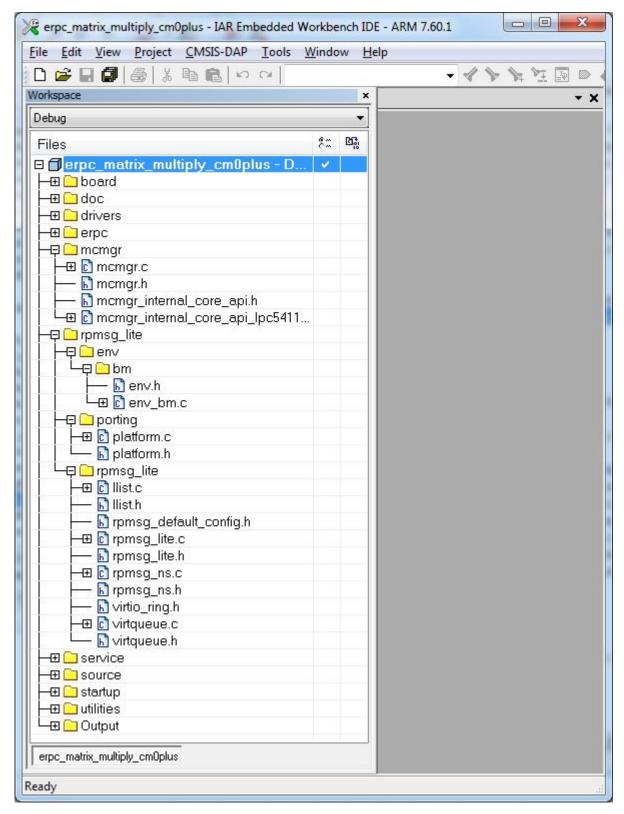


Figure 4. Server multicore infrastructure files

3.4.1.5 Server user code

The server's user code is stored in the main corel.c file, located in the following folder:

<MCUXpressoSDK_install_dir>/boards/lpcxpresso54114/multicore_examples/erpc_matrix_multiply_rpmsg/cm0plus

The main corel.c file contains two functions:

- The **main()** function contains the code for the target board and eRPC server initialization. After the initialization, the matrix multiply service is added and the eRPC server waits for client's requests in the while loop.
- The erpcMatrixMultiply() function is the user implementation of the eRPC function defined in the IDL file.
- There is the possibility to write the application-specific eRPC error handler. The eRPC error handler of the matrix multiply application is implemented in the <code>erpc_error_handler.h</code> and <code>erpc_error_handler.cpp</code> files.

The eRPC-relevant code is captured in the following code snippet:

```
/* erpcMatrixMultiply function user implementation */
void erpcMatrixMultiply(const Matrix *matrix1, const Matrix *matrix2, Matrix *result matrix)
{
. . .
}
int main()
{
/* RPMsg-Lite transport layer initialization */
erpc_transport_t transport;
transport = erpc transport rpmsg lite remote init(src, dst, (void *)startupData,
ERPC TRANSPORT RPMSG LITE LINK ID, SignalReady, NULL);
/* MessageBufferFactory initialization */
erpc mbf t message buffer factory;
message_buffer_factory = erpc_mbf_rpmsg_init(transport);
/* eRPC server side initialization */
erpc server init(transport, message buffer factory);
/* Adding the service to the server */
erpc_service_t service = create_MatrixMultiplyService_service();
erpc add service to server(service);
while (1)
/* Process eRPC requests */
erpc_status_t status = erpc_server_poll();
/* handle error status */
if (status != kErpcStatus Success)
/* print error description */
erpc error handler(status, 0);
. . .
}
. . .
}
}
```

Except for the application main file, there are configuration files for the RPMsg-Lite (rpmsg_config.h) and eRPC (erpc_config.h), located in the <mcUXpressoSDK_install_dir>/boards/lpcxpresso54114/multicore_examples/erpc_matrix_multiply_rpmsg folder.

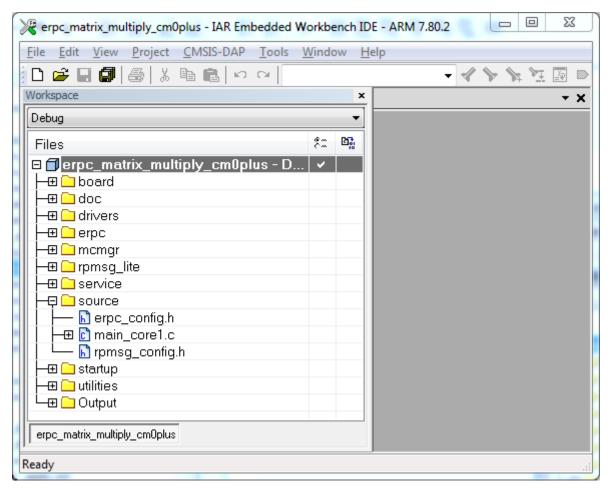


Figure 5. Server user code

3.4.2 Multicore client application

The "Matrix multiply" eRPC client project is located in the following folder:

<MCUXpressoSDK_install_dir>/boards/lpcxpresso54114/multicore_examples/erpc_matrix_multiply_rpmsg/cm4/iar/
Project files for the eRPC client have the cm4 suffix.

3.4.2.1 Client project basic source files

The startup files, board-related settings, peripheral drivers, and utilities belong to the basic project source files and form the skeleton of all MCUXpresso SDK applications. These source files are located in the following folders:

- <MCUXpressoSDK_install_dir>/devices/<device>
- <MCUXpressoSDK_install_dir>/boards/<board_name>/multicore_examples/<example_name>/

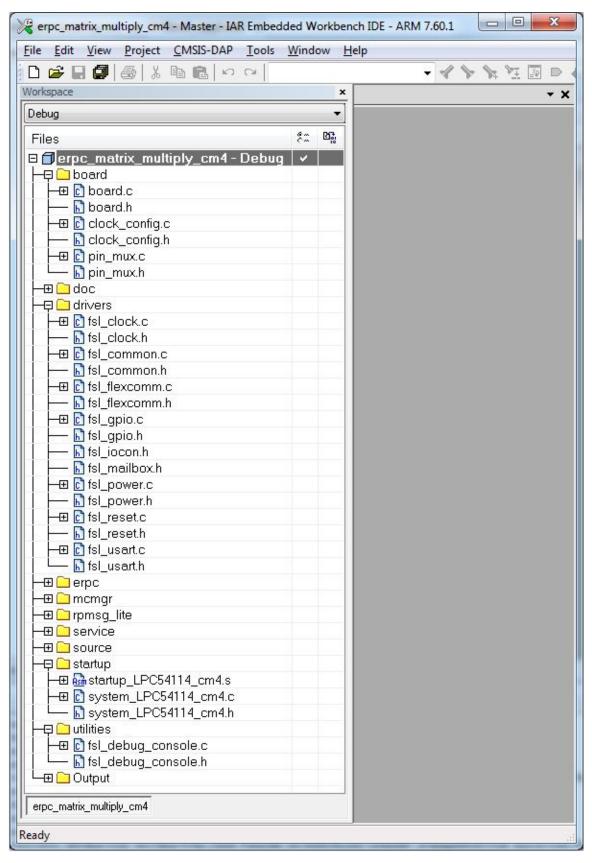


Figure 6. Client application

3.4.2.2 Client-related generated files

The client-related generated files are:

- $erpc_matric_multiply.h$
- erpc matrix multiply client.cpp

These files contain the shim code for the functions and data types declared in the IDL file. These functions also call methods for codec initialization, data serialization, performing eRPC requests, and de-serializing outputs into expected data structures (if return values are expected). These shim code files can be found in the <math representation of the multiple of the common of the commo

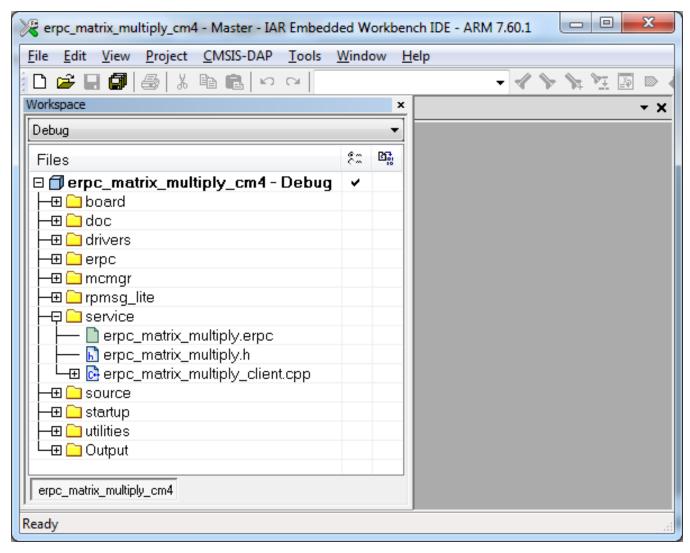


Figure 7. Client-related generated files

3.4.2.3 Client infrastructure files

The eRPC infrastructure files are located in the following folder:

<MCUXpressoSDK_install_dir>/middleware/multicore/erpc/erpc_c

The **erpc_c** folder contains files for creating eRPC client and server applications in C/C++. These files are distributed into subfolders.

• The infra subfolder contains C++ infrastructure code used to build server and client applications.

- Two files, erpc_client_manager.h and erpc_client_manager.cpp, are used for managing the client-side application. The main purpose of the client files is to create, perform, and release eRPC requests.
- Three files (erpc_codec.h, erpc_basic_codec.h, and erpc_basic_codec.cpp) are used for codecs. Currently, the basic codec is the initial and only implementation of the codecs.
- erpc common.h file is used for common eRPC definitions, typedefs, and enums.
- erpc manually constructed.h file is used for allocating static storage for the used objects.
- Message buffer files are used for storing serialized data: erpc message buffer.h and erpc message buffer.cpp.
- erpc transport.h file defines the abstract interface for transport layer.

The **port** subfolder contains the eRPC porting layer to adapt to different environments.

- erpc_port.h file contains definition of erpc_malloc() and erpc_free() functions.
- erpc port stdlib.cpp file ensures adaptation to stdlib.
- erpc_config_internal.h internal eRPC configuration file.

The **setup** subfolder contains a set of plain C APIs that wrap the C++ infrastructure, providing client and server init and deinit routines that greatly simplify eRPC usage in C-based projects. No knowledge of C++ is required to use these APIs.

- erpc_client_setup.h and erpc_client_setup.cpp files needs to be aded into the "Matrix multiply" example project to demonstrate the use of C-wrapped functions in this example.
- erpc_transport_setup.h and erpc_setup_rpmsg_lite_master.cpp files needs to be added into the project in order to allow C-wrapped function for transport layer setup.
- erpc_mbf_setup.h and erpc_setup_mbf_rpmsg.cpp files needs to be added into the project in order to allow message buffer factory usage.

The **transports** subfolder contains transport classes for the different methods of communication supported by eRPC. Some transports are applicable only to host PCs, while others are applicable only to embedded or multicore systems. Most transports have corresponding client and server setup functions, in the setup folder.

• RPMsg-Lite is used as the transport layer for the communication between cores, erpc_rpmsg_lite_base_transport.h, erpc rpmsg lite transport.h, and erpc rpmsg lite transport.cpp files needs to be added into the client project.

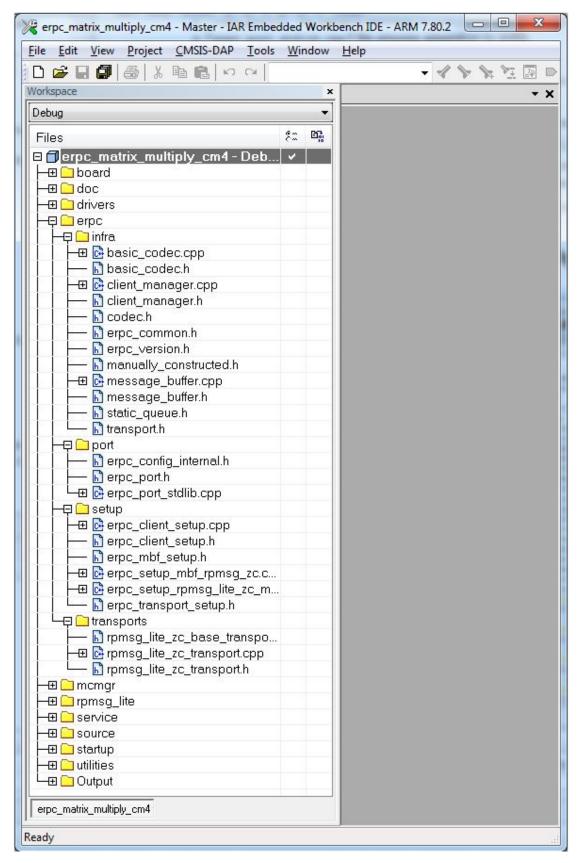


Figure 8. Client infrastructure files

3.4.2.4 Client multicore infrastructure files

Because of the RPMsg-Lite (transport layer), it is also necessary to include RPMsg-Lite related files, which are in the following folder:

<MCUXpressoSDK_install_dir>/middleware/multicore/rpmsg_lite/

The multicore example applications also use the Multicore Manager software library to control the secondary core startup and shutdown. These source files are located in the following folder:

<MCUXpressoSDK_install_dir>/middleware/multicore/mcmgr/

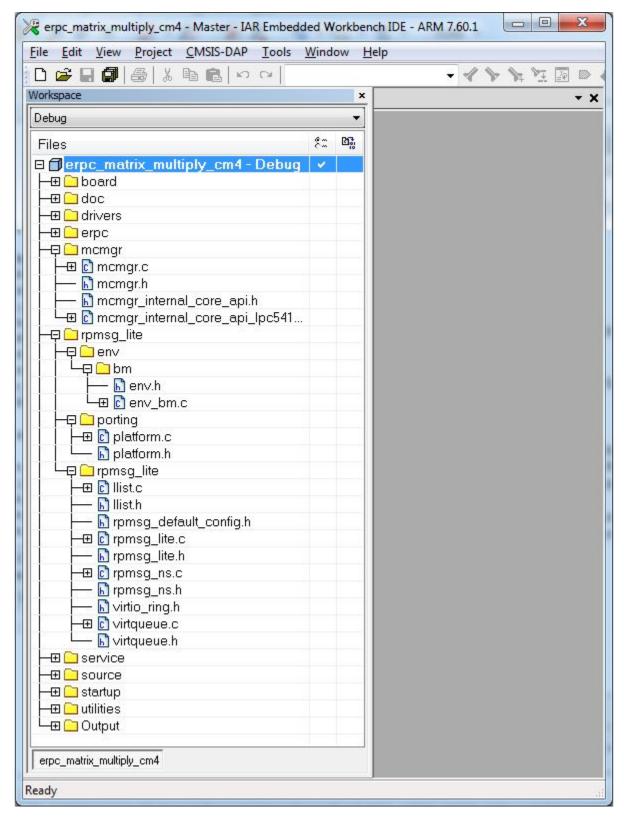


Figure 9. Client multicore infrastructure files

3.4.2.5 Client user code

The client's user code is stored in the main_core0.c file, located in the following folder:

<MCUXpressoSDK_install_dir>/boards/lpcxpresso54114/multicore_example/erpc_matrix_multiply_rpmsg/cm4

The main core0.c file contains the code for target board and eRPC initialization.

- · After initialization, the secondary core is released from reset.
- When the secondary core is ready, the primary core initializes two matrix variables.
- The erpcMatrixMultiply eRPC function is called to issue the eRPC request and get the result.

It is possible to write the application-specific eRPC error handler. The eRPC error handler of the matrix multiply application is implemented in erpc error handler.h and erpc error handler.cpp files.

The matrix multiplication can be issued repeatedly, when pressing a software board button.

The eRPC-relevant code is captured in the following code snippet:

```
extern bool g erpc error occurred;
/* Declare matrix arrays */
Matrix matrix1 = \{0\}, matrix2 = \{0\}, result matrix = \{0\};
/* RPMsg-Lite transport layer initialization */
erpc transport t transport;
transport = erpc transport rpmsg lite master init(src, dst,
ERPC TRANSPORT RPMSG LITE LINK ID);
. . .
/* MessageBufferFactory initialization */
erpc mbf t message buffer factory;
message_buffer_factory = erpc_mbf_rpmsg_init(transport);
/* eRPC client side initialization */
erpc client init(transport, message buffer factory);
/* Set default error handler */
erpc client set error handler(erpc error handler);
while (1)
/* Invoke the erpcMatrixMultiply function */
erpcMatrixMultiply(matrix1, matrix2, result matrix);
/\star Check if some error occured in eRPC \star/
if (g erpc error occurred)
/* Exit program loop */
break;
}
. . .
```

Except for the application main file, there are configuration files for the RPMsg-Lite (rpmsg_config.h) and eRPC (erpc_config.h), located in the following folder:

<MCUXpressoSDK install dir>/boards/lpcxpresso54114/multicore examples/erpc matrix multiply rpmsg

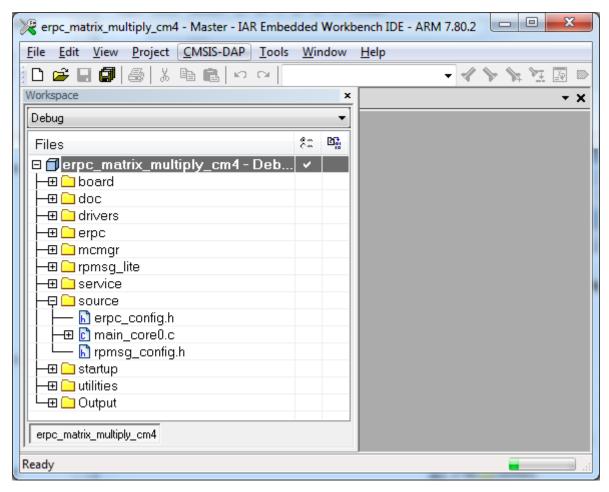


Figure 10. Client user code

3.4.3 Multiprocessor server application

The "Matrix multiply" eRPC server project for multiprocessor applications is located in the MCUXpressoSDK_install_dir>>/boards/<board_name>/multiprocessor_examples/erpc_server_matrix_multiply_<transport_layer> folder.

Most of the multiprocessor application setup is the same as for the multicore application. The multiprocessor server application requires server-related generated files (server shim code), server infrastructure files, and the server user code. There is no need for server multicore infrastructure files (MCMGR and RPMsg-Lite). The RPMsg-Lite transport layer is replaced either by SPI or UART transports. The following table shows the required transport-related files per each transport type.

Table 3. Transport-related eRPC files for the server side application

SPI	<erpc base="" directory="">/erpc_c/setup/ erpc_setup_(d)spi_slave.cpp</erpc>	
	<erpc base="" directory="">/erpc_c/transports/ erpc_(d)spi_slave_transport.h</erpc>	
	<erpc base="" directory="">/erpc_c/transports/ erpc_(d)spi_slave_transport.cpp</erpc>	
UART	<pre><erpc base="" directory="">/erpc_c/setup/ erpc_setup_uart_cmsis.cpp</erpc></pre>	

Table 3. Transport-related eRPC files for the server side application (continued)

```
<eRPC base directory>/erpc_c/transports/
erpc_uart_cmsis_transport.h

<eRPC base directory>/erpc_c/transports/
erpc_uart_cmsis_transport.cpp
```

3.4.3.1 Server user code

The server's user code is stored in the main_server.c file, located in the MCUXpressoSDK_install_dir>/boards/<bar>/ multiprocessor_examples/erpc_server_matrix_multiply_transport_layer>/folder.

The eRPC-relevant code with UART as a transport is captured in the following code snippet:

```
/* erpcMatrixMultiply function user implementation */
void erpcMatrixMultiply(Matrix matrix1, Matrix matrix2, Matrix result matrix)
{
. . .
}
int main()
{
/* UART transport layer initialization, ERPC DEMO UART is the structure of CMSIS UART
driver operations */
erpc transport t transport;
transport = erpc_transport_cmsis_uart_init((void *)&ERPC DEMO UART);
/* MessageBufferFactory initialization */
erpc mbf t message buffer factory;
message_buffer_factory = erpc_mbf_dynamic_init();
/* eRPC server side initialization */
erpc server init(transport, message buffer factory);
/* Adding the service to the server */
erpc_service_t service = create_MatrixMultiplyService_service();
erpc_add_service_to_server(service);
. . .
while (1)
/* Process eRPC requests */
erpc_status_t status = erpc_server_poll();
/* handle error status */
if (status != kErpcStatus_Success)
/* print error description */
erpc_error_handler(status, 0);
}
. . .
```

3.4.3.2 Multiprocessor client application

The "Matrix multiply" eRPC client project for multiprocessor applications is located in the <mcUXpressoSDK_install_dir>/boards/

Most of the multiprocessor application setup is the same as for the multicore application. The multiprocessor server application requires client-related generated files (server shim code), client infrastructure files, and the client user code. There is no need for client multicore infrastructure files (MCMGR and RPMsg-Lite). The RPMsg-Lite transport layer is replaced either by SPI or UART transports. The following table shows the required transport-related files per each transport type.

Table 4. Transport-related eRPC files for the client side application

SPI	<pre><erpc base="" directory="">/erpc_c/setup/ erpc_setup_(d)spi_master.cpp</erpc></pre>
	<erpc base="" directory="">/erpc_c/transports/ erpc_(d)spi_master_transport.h</erpc>
	<erpc base="" directory="">/erpc_c/transports/ erpc_(d)spi_master_transport.cpp</erpc>
UART	<pre><erpc base="" directory="">/erpc_c/setup/ erpc_setup_uart_cmsis.cpp</erpc></pre>
	<pre><erpc base="" directory="">/erpc_c/transports/ erpc_uart_cmsis_transport.h</erpc></pre>
	<pre><erpc base="" directory="">/erpc_c/transports/ erpc_uart_cmsis_transport.cpp</erpc></pre>

3.4.3.2.1 Client user code

The client's user code is stored in the <code>main_client.c</code> file, located in the <code><MCUXpressoSDK_install_dir>/boards/<board_name>/multiprocessor_examples/erpc_client_matrix_multiply_<transport_layer>/folder.</code>

The eRPC-relevant code with UART as a transport is captured in the following code snippet:

```
extern bool g erpc error occurred;
/* Declare matrix arrays */
Matrix matrix1 = \{0\}, matrix2 = \{0\}, result matrix = \{0\};
/* UART transport layer initialization, ERPC DEMO UART is the structure of CMSIS UART
driver operations */
erpc transport t transport;
transport = erpc transport cmsis uart init((void *)&ERPC DEMO UART);
/* MessageBufferFactory initialization */
erpc mbf t message buffer factory;
message buffer factory = erpc mbf dynamic init();
/* eRPC client side initialization */
erpc client init(transport, message buffer factory);
/* Set default error handler */
erpc client set error handler(erpc error handler);
while (1)
/* Invoke the erpcMatrixMultiply function */
erpcMatrixMultiply(matrix1, matrix2, result matrix);
/* Check if some error occured in eRPC */
if (g erpc error occurred)
```

```
{
/* Exit program loop */
break;
}
...
}
```

3.4.4 Running the eRPC application

Follow the instructions in *Getting Started with MCUXpresso SDK* (document MCUXSDKGSUG) (located in the kmcuxpressoSDK_install_dir/docs folder), to load both the primary and the secondary core images into the on-chip memory, and then effectively debug the dual-core application. After the application is running, the serial console should look like:

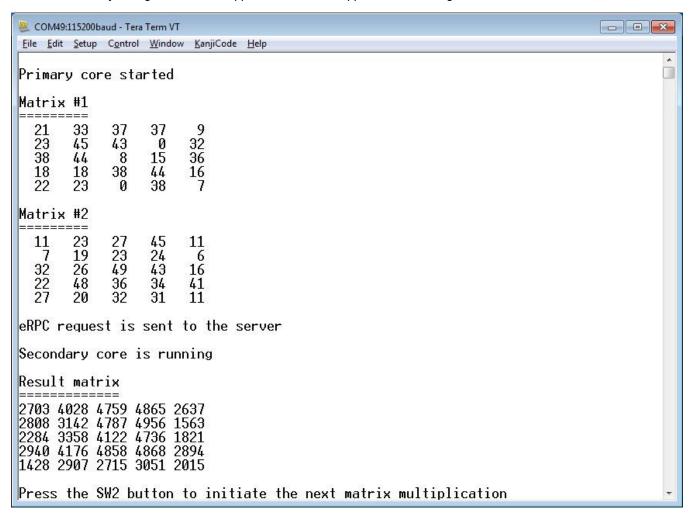


Figure 11. Running the eRPC application

For multiprocessor applications that are running between PC and the target evaluation board or between two boards, follow the instructions in the accompanied example readme files that provide details about the proper board setup and the PC side setup (Python).

Chapter 4 Other uses for an eRPC implementation

The eRPC implementation is generic, and its use is not limited to just embedded applications. When creating an eRPC application outside the embedded world, the same principles apply. For example, this manual can be used to create an eRPC application for a PC running the Linux operating system. Based on the used type of transport medium, existing transport layers can be used, or new transport layers can be implemented.

For more information and erpc updates see the github.com/EmbeddedRPC.

Chapter 5 Revision history

To provide the most up-to-date information, the revisions of our documents on the Internet are the most current. Your printed copy may be an earlier revision.

This revision history table summarizes the changes contained in this document since the last release.

Table 5. Revision history

Revision number	Date	Substantive changes
0	09/2015	Initial release
1	04/2016	Updated to Kinetis SDK v.2.0 and Multicore SDK v.1.1.0
2	09/2016	Updated to Kinetis SDK v.2.0 and Multicore SDK v.2.0.0
3	09/2016	Updated to Multicore SDK v.2.1.0 and eRPC v.1.3.0
		Added new sections covering multiprocessor applications
4	03/2017	Updated to Multicore SDK v.2.2.0 and eRPC v.1.4.0
5	11/2017	Updated to Multicore SDK v.2.3.0 and eRPC v.1.5.0
		MCUXpresso SDK 2.3.0 release
6	05/2018	Editorial updates for MCUXpresso SDK v2.3.1 and MCUXpresso SDK v.2.4.0
7	12/2019	Editorial and other updates for MCUXpresso SDK v2.7.0

How To Reach Us

Home Page:

www.nxp.com

Web Support:

www.nxp.com/support

Information in this document is provided solely to enable system and software implementers to use NXP products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits based on the information in this document. NXP reserves the right to make changes without further notice to any products herein.

NXP makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does NXP assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in NXP data sheets and/or specifications can and do vary in different applications, and actual performance may vary over time. All operating parameters, including "typicals," must be validated for each customer application by customer's technical experts. NXP does not convey any license under its patent rights nor the rights of others. NXP sells products pursuant to standard terms and conditions of sale, which can be found at the following address: www.nxp.com/
SalesTermsandConditions.

While NXP has implemented advanced security features, all products may be subject to unidentified vulnerabilities. Customers are responsible for the design and operation of their applications and products to reduce the effect of these vulnerabilities on customer's applications and products, and NXP accepts no liability for any vulnerability that is discovered. Customers should implement appropriate design and operating safeguards to minimize the risks associated with their applications and products.NXP, the NXP logo, NXP SECURE CONNECTIONS FOR A SMARTER WORLD, COOLFLUX, EMBRACE, GREENCHIP, HITAG, I2C BUS, ICODE, JCOP, LIFE VIBES, MIFARE, MIFARE CLASSIC, MIFARE DESFire, MIFARE PLUS, MIFARE FLEX, MANTIS, MIFARE ULTRALIGHT, MIFARE4MOBILE, MIGLO, NTAG, ROADLINK, SMARTLX, SMARTMX, STARPLUG, TOPFET, TRENCHMOS, UCODE, Freescale, the Freescale logo, AltiVec, C - 5, CodeTEST, CodeWarrior, ColdFire, ColdFire+, C - Ware, the Energy Efficient Solutions logo, Kinetis, Layerscape, MagniV, mobileGT, PEG, PowerQUICC, Processor Expert, QorlQ, QorlQ Qonverge, Ready Play, SafeAssure, the SafeAssure logo, StarCore, Symphony, VortiQa, Vybrid, Airfast, BeeKit, BeeStack, CoreNet, Flexis, MXC, Platform in a Package, QUICC Engine, SMARTMOS, Tower, TurboLink, and UMEMS are trademarks of NXP B.V. All other product or service names are the property of their respective owners. AMBA, Arm, Arm7, Arm7TDMI, Arm9, Arm11, Artisan, big.LITTLE, Cordio, CoreLink, CoreSight, Cortex, DesignStart, DynamIQ, Jazelle, Keil, Mali, Mbed, Mbed Enabled, NEON, POP, RealView, SecurCore, Socrates, Thumb, TrustZone, ULINK, ULINK2, ULINK-ME, ULINK-PLUS, ULINKpro, μVision, Versatile are trademarks or registered trademarks of Arm Limited (or its subsidiaries) in the US and/or elsewhere. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. Oracle and Java are registered trademarks of Oracle and/or its affiliates. The Power Architecture and Power.org word marks and the Power and Power.org logos and related marks are trademarks and service marks licensed by Power.org.

© NXP B.V. 2019.

All rights reserved.

For more information, please visit: http://www.nxp.com
For sales office addresses, please send an email to: salesaddresses@nxp.com

Date of release: 12/2019
Document identifier: MCSDKERPCGSUG